

# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

D3G146-AH77-12 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner: Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142



## Nominal data

Type	D3G146-AH77-12	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
Speed	min <sup>-1</sup>	2600
Power input	W	240
Current draw	A	1.8
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

## Data according to ErP directive

		Actual	Request 2013	Request 2015
Installation category	A			
Efficiency category	Static			
Variable speed drive integrated	Integrated			
Specific ratio*	1,00			
Overall efficiency $\eta_{es}$		43,4	26,6	33,6
Efficiency grade N		53,8	37	44
Power input $P_{ed}$	kW	0,23		
Air flow $q_v$	m <sup>3</sup> /h	745		
Pressure increase $p_{fs}$	Pa	431		
Speed n	min <sup>-1</sup>	2675		

Data established at point of optimum efficiency

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$



# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Technical features


<b>Mass</b>	4.2 kg
<b>Size</b>	146 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of impeller</b>	Sheet steel, coated in black
<b>Housing material</b>	Sheet steel, hot-dip galvanised
<b>Motor suspension</b>	Motor mounted with anti-vibration on both sides
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 44; Depending on installation and position
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F3-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Control input 0-10 VDC / PWM</li> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Soft start</li> <li>- Motor current limit</li> </ul>
<b>Leakage current</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Cable exit</b>	Variable
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE



# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Product drawing

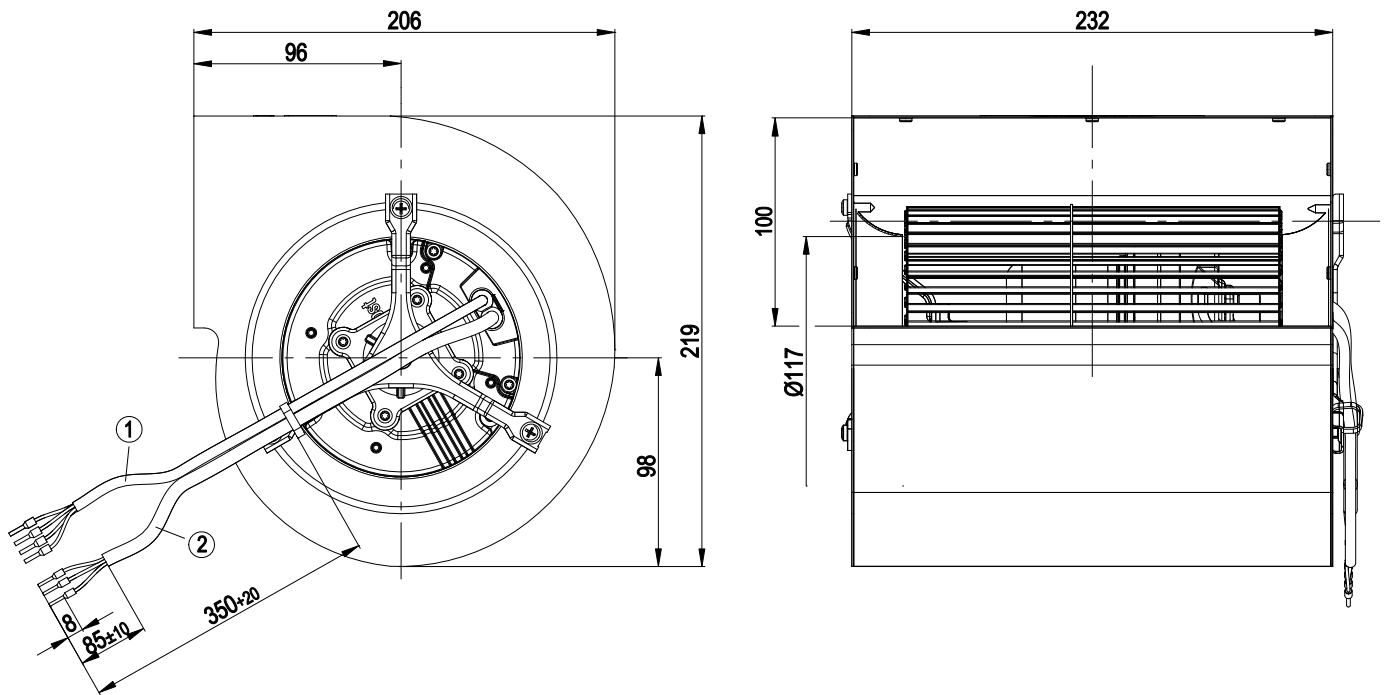


- |   |  |
|---|--|
| 1 | Connection line PVC AWG22, 4x crimped core-end sleeves |
| 2 | Connection line PVC AWG18, 3x crimped core-end sleeves |

# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Connection screen

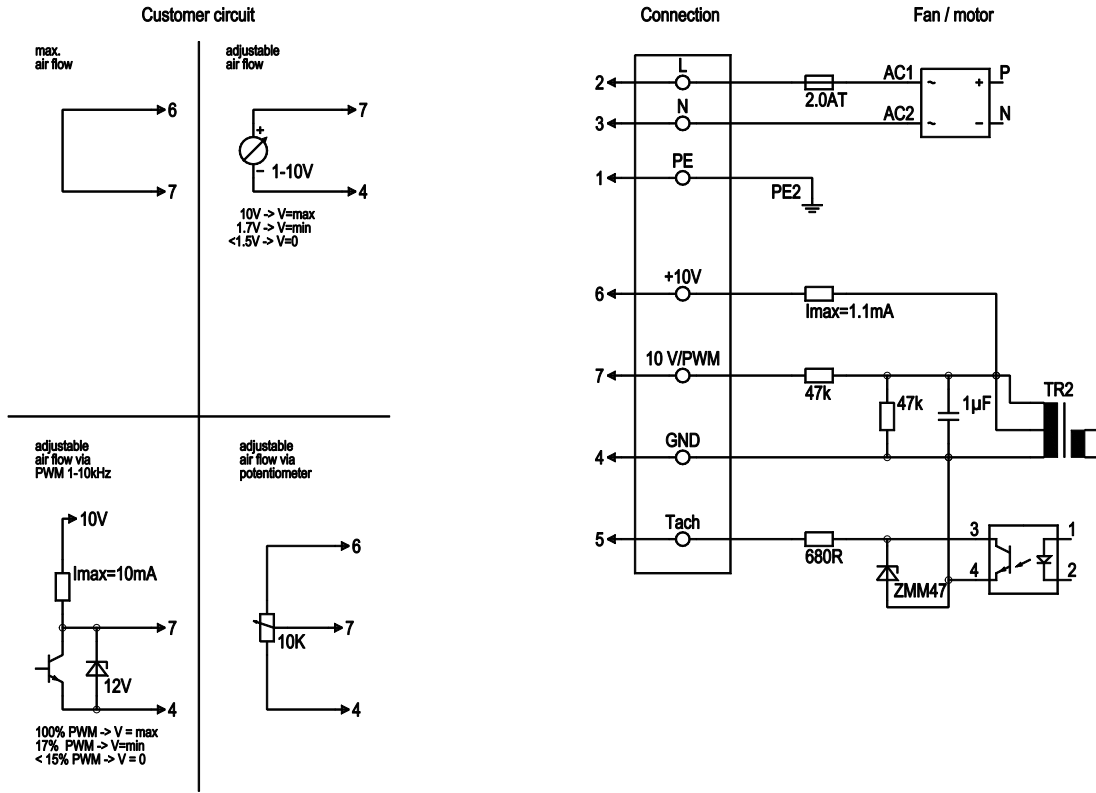


Line	No.	Signal	Colour	Function / assignment
	2	L	black	Power supply 230 VAC, 50-60 Hz, see type plate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	7	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
	5	Tacho	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	6	10V / max 1.1 mA	red	Voltage output 10 V / 1 mA, electrically isolated
	4	GND	blue	GND - Connection for control interface



# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Charts: Air flow 50 Hz

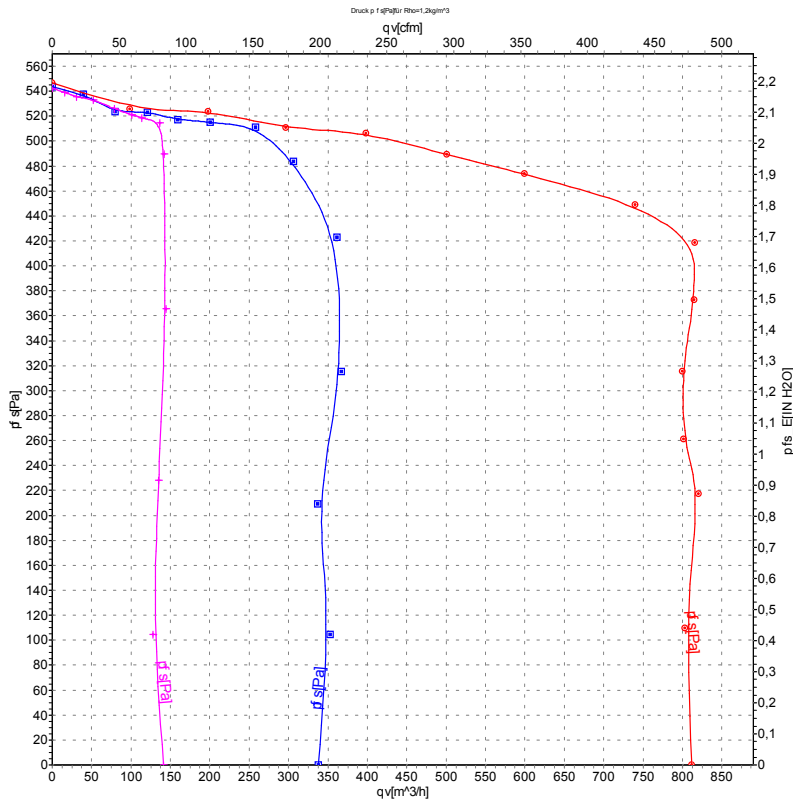

Measurement: LU-110203  
Measurement: LU-110207  
Measurement: LU-110211

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebmpapst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

