

AC centrifugal fan

forward curved

R2E140-BR64-22 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	R2E140-BR64-22	
Motor	M2E052-CA	
Phase		1~
Nominal voltage range	VAC	220 .. 240
Frequency	Hz	50
Type of data definition		cs
Valid for approval / standard		CE
Speed	min ⁻¹	1800
Power input	W	50
Current draw	A	0.24
Motor capacitor	µF	1
Capacitor voltage	VDB	400
Capacitor standard		P0 (CE)
Max. ambient temperature	°C	-


ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations



Technical features


Mass	0.8 kg
Size	140 mm
Material of impeller	Plastic PA6
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Twin bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Electrical leads	With plug
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE

Product drawing

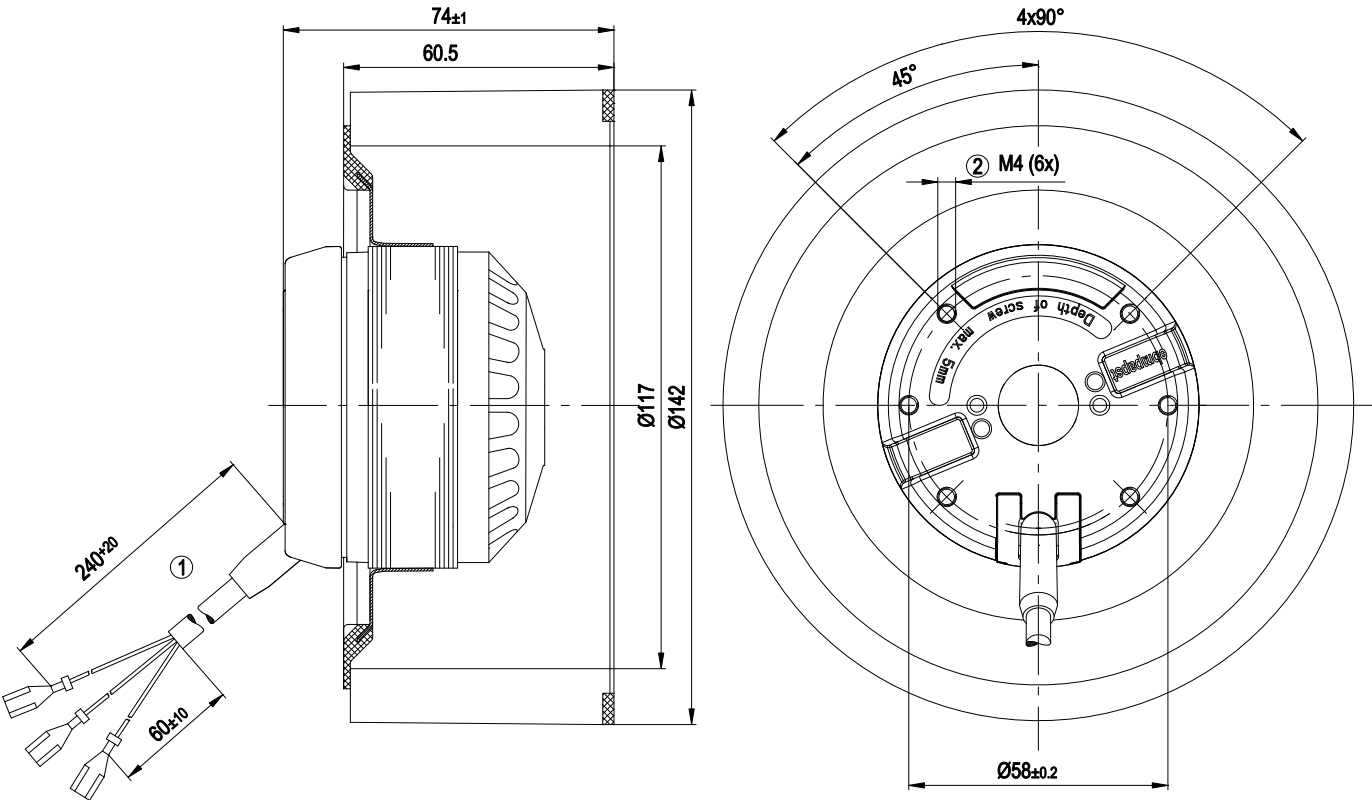

- | | |
|---|--|
| 1 | Connection line PVC 3 x 0.5 mm ² , 3x receptacles for tabs 6.3 x 0.8, crimped |
| 2 | Depth of screw max. 5 mm |

Connection screen




U1	Blue	Z	brown	U2	black
----	------	---	-------	----	-------



AC centrifugal fan
forward curved

Charts: Air flow 50 Hz

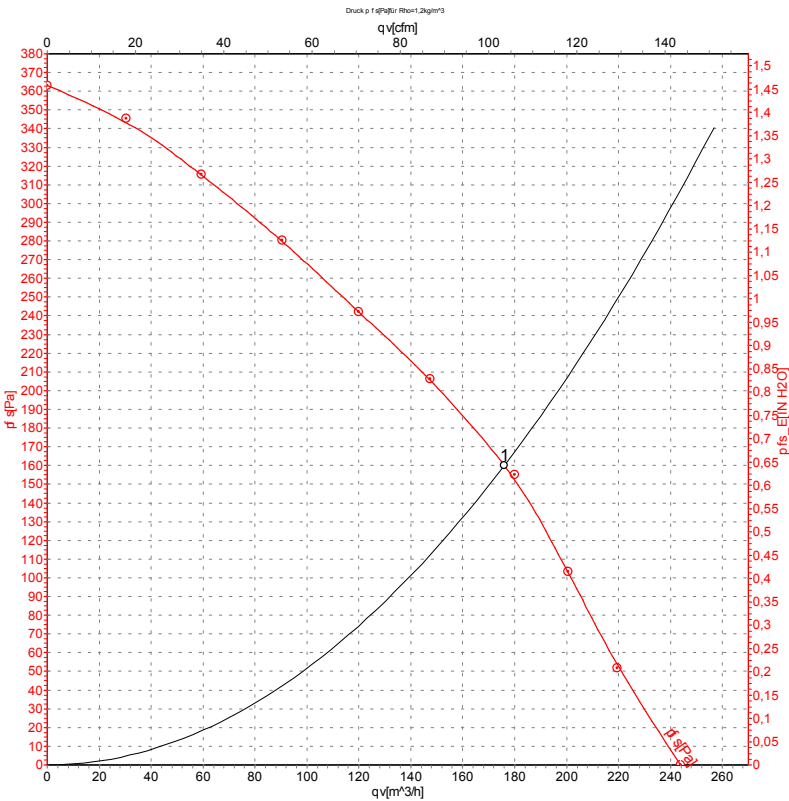

Measurement: LU-72071

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	50	1800	50	0.24	175	160

U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

