

Nominal data

Type	K3G310-PH58-11	
Motor	M3G112-GA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	4000
Power consumption	W	2950
Current draw	A	4.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	66.1	56.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		71.7	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	2.93
09 Air flow q_v	m ³ /h	4505
09 Pressure increase p_{fs}	Pa	1479
10 Speed (rpm) n	min ⁻¹	4045
11 Specific ratio*		1.02

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-176710



Technical description

Size	310 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Operation and alarm display - Input for sensor 0-10 V or 4-20 mA - External 24 V input (parameter setting) - External release input - Alarm relay - Integrated PID controller - Power limiter - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Electrical hookup	Terminal box with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Lateral

K3G310-PH58-11

EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1




EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket


Product drawing

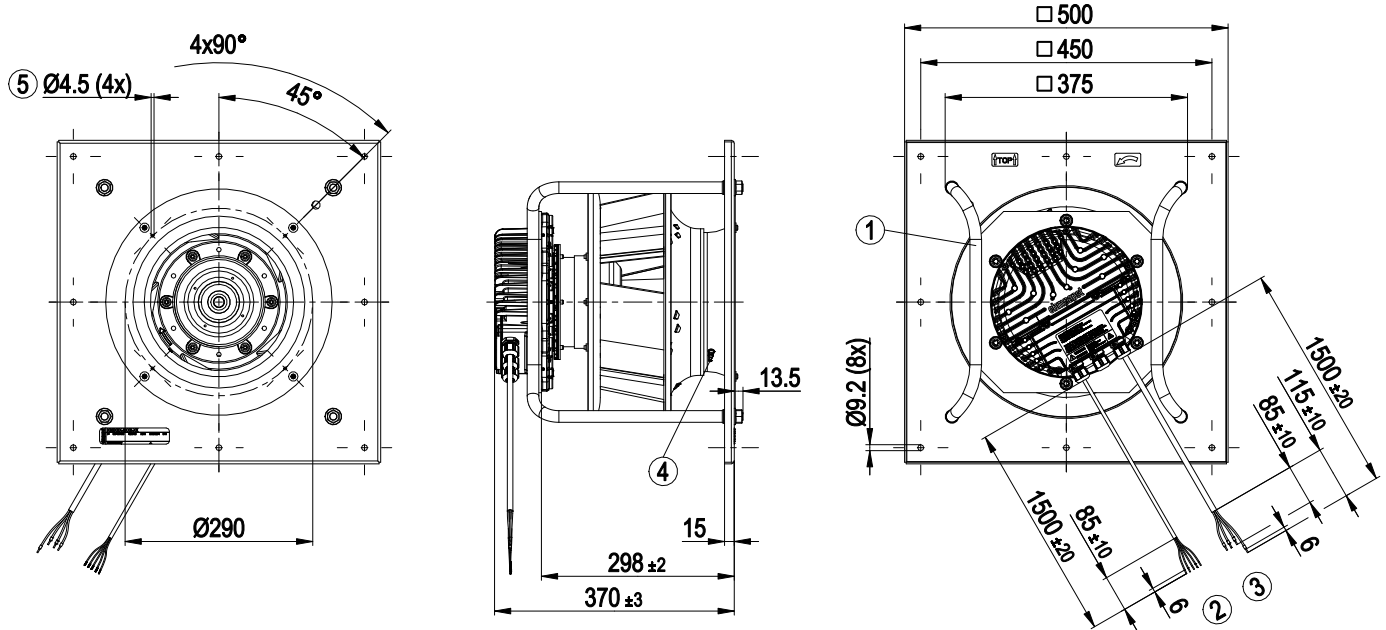

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable PVC AWG22
	5x splice
3	Cable PVC AWG18
	4x wire-end ferrule
4	Inlet ring with pressure tap (k-factor: 116)
5	Attachment holes for FlowGrid (25310-2-2957 not included in scope of delivery)

backward-curved, single-intake
with support bracket

Connection diagram

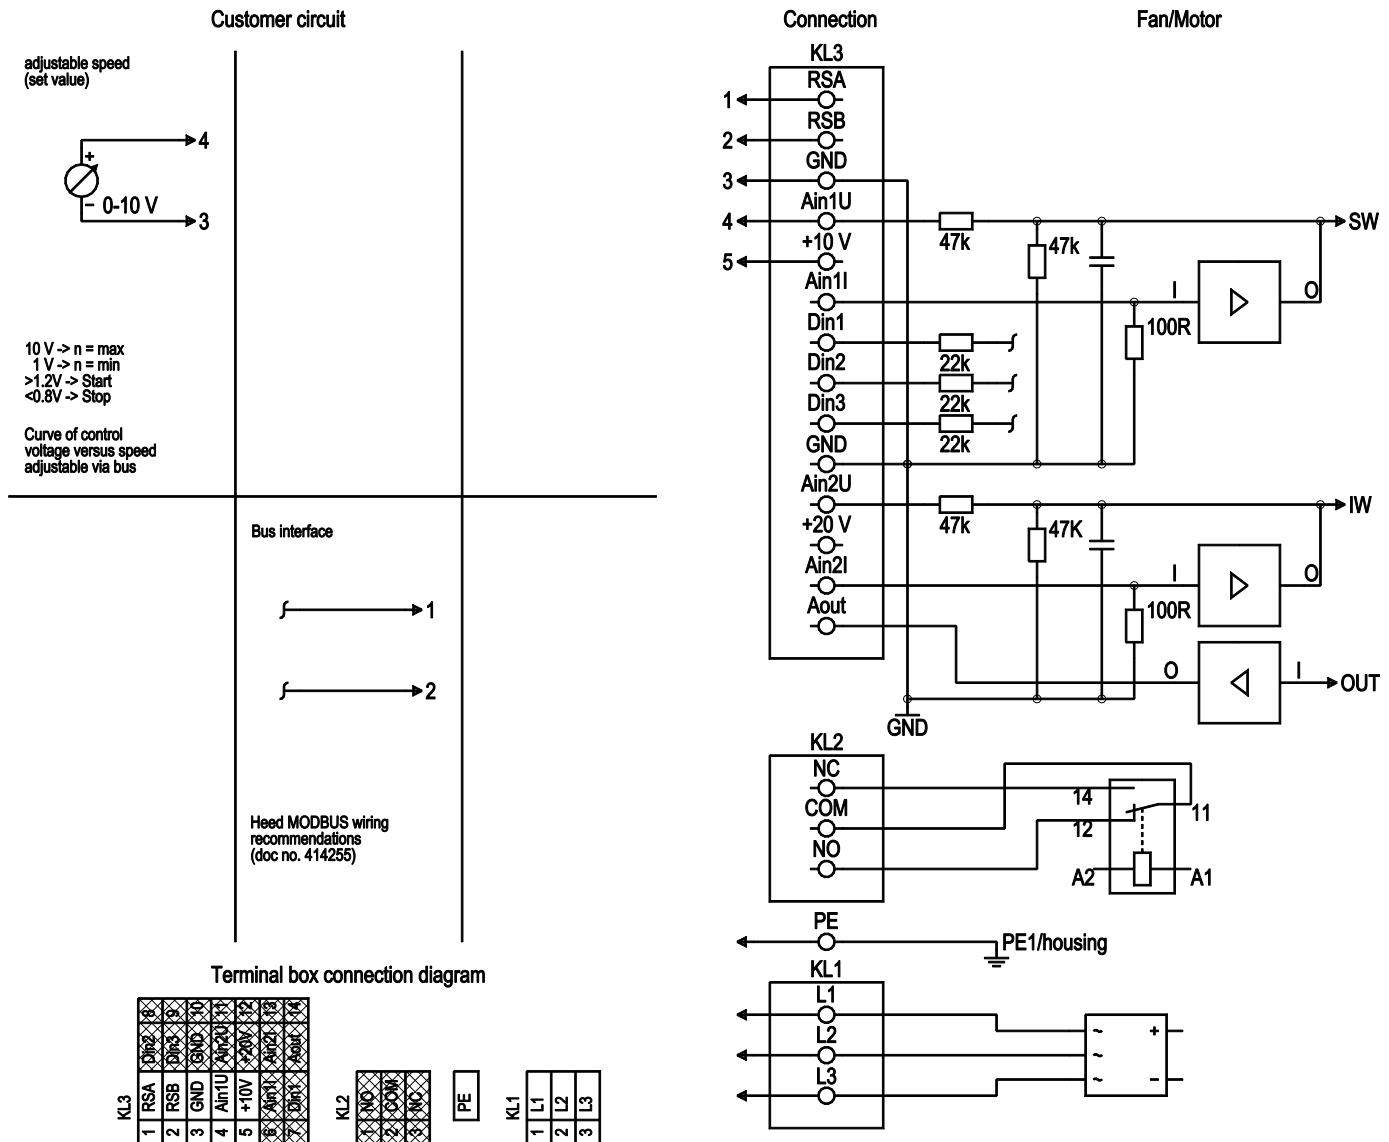

shaded gray => not brought out via leads

No.	Conn.	Designation	Color	Function/assignment
KL 1	1	L1	black 1	Supply connection, power supply; for nominal voltage range see technical data
KL 1	2	L2	black 2	Supply connection, power supply; for nominal voltage range see technical data
KL 1	3	L3	black 3	Supply connection, power supply; for nominal voltage range see technical data
PE		PE	green/yellow	Ground connection, PE connection
KL 2	1	NO		Status relay, floating status contact, make for failure
KL2	2	COM		Status relay, floating status contact, changeover contact, common connection; contact rating 30 VAC/max. 2 A (AC1)/min. 10 mA
KL2	3	NC		Status relay, floating status contact, break for failure
KL 3	1	RSA	white	Bus connection RS485, RSA, MODBUS RTU; SELV
KL 3	2	RSB	brown	Bus connection RS485, RSB, MODBUS RTU; SELV
KL 3	3 / 10	GND	blue	Reference ground for control interface; SELV

EC centrifugal module - RadiCal


backward-curved, single-intake

with support bracket

No.	Conn.	Designation	Color	Function/assignment
KL 3	4	Ain1 U	yellow	Analog input 1, set value: 0-10 V, $R_i = 100\text{ k}\Omega$, adjustable curve, only usable as alternative to input Ain1 I; SELV
KL 3	5	+ 10 V	red	Fixed voltage output 10 VDC, $+10\text{ V} \pm 3\%$, max. 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer); SELV
KL 3	6	Ain1 I		Analog input 1, set value: 4-20 mA, $R_i = 100\ \Omega$, adjustable curve, only usable as alternative to input Ain1 U; SELV
KL 3	7	Din1		Digital input 1: enable electronics, enable: pin open or applied voltage 5-50 VDC disable: bridge to GND or applied voltage $< 1\text{ VDC}$ reset function: triggers software reset after a level change to $< 1\text{ VDC}$; SELV
KL 3	8	Din2		Digital input 2: Switching parameter sets 1/2, according to EEPROM setting, the valid or used parameter set can be selected via bus or via digital input DIN2. Parameter set 1: pin open or applied voltage 5-50 VDC Parameter set 2: bridge to GND or applied voltage $< 1\text{ VDC}$; SELV
KL 3	9	Din3		Digital input 3: according to EEPROM setting, the integrated controller's direction of action can be selected via bus or digital input Din3; normal: pin open or applied voltage 5-50 VDC inverse: bridge to GND or applied voltage $< 1\text{ VDC}$; SELV
KL 3	11	Ain2 U		Analog input 2, measured value: 0-10 V, $R_i = 100\text{ k}\Omega$, adjustable curve, only usable as alternative to input Ain2 I; SELV
KL 3	12	+ 20 V		Fixed voltage output 20 VDC, $+20\text{ V} \pm 25/-10\%$, max. 50 mA, short-circuit-proof, power supply for ext. devices (e.g. sensors); SELV Alternatively: +24 VDC input for parameterization without line voltage
KL 3	13	Ain2 I		Analog input 2, measured value: 4-20 mA, $R_i = 100\ \Omega$, adjustable curve, only usable as alternative to input Ain2 U; SELV
KL 3	14	Aout		Analog output 0-10 VDC, max. 5 mA, output of current motor modulation level / motor speed adjustable curve; SELV



Curves: Air performance 50 Hz

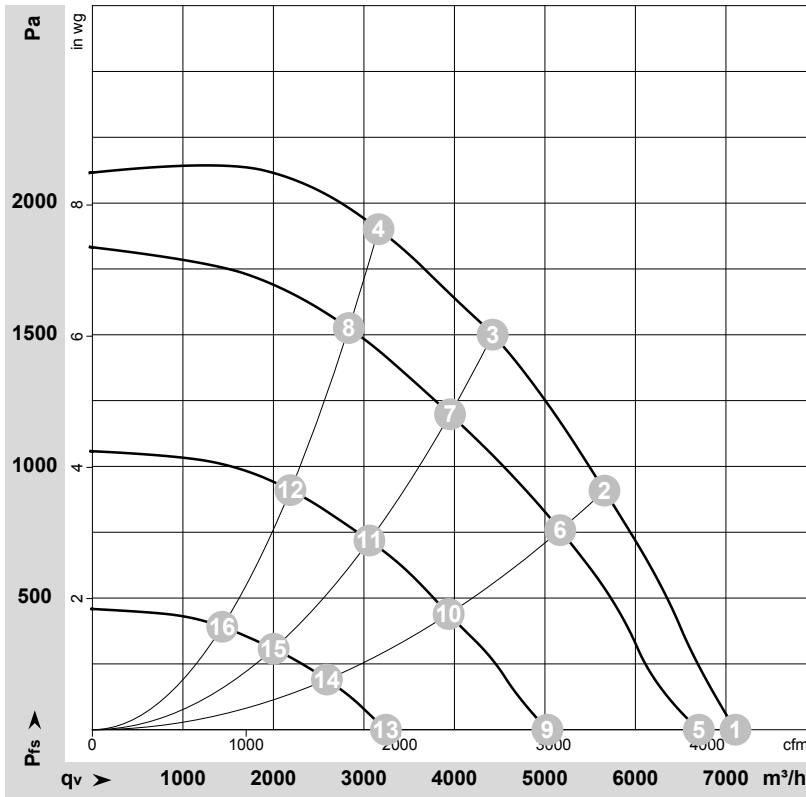

$$\rho = 1.177 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-176710-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	4000	1707	2.66	95	102	102	7105	0	4180	0.00
2	400	50	4000	2611	4.03	85	92	95	5660	900	3330	3.61
3	400	50	4000	2943	4.53	82	89	93	4425	1500	2605	6.02
4	400	50	4000	2950	4.60	84	92	94	3160	1900	1860	7.63
5	400	50	3795	1414	2.22	94	100	100	6700	0	3945	0.00
6	400	50	3655	1998	3.09	83	89	92	5170	762	3040	3.06
7	400	50	3585	2078	3.21	79	86	91	3950	1198	2325	4.81
8	400	50	3610	2103	3.24	79	88	91	2835	1529	1665	6.14
9	400	50	2865	671	1.18	84	92	94	5025	0	2960	0.00
10	400	50	2810	957	1.57	75	82	86	3935	438	2315	1.76
11	400	50	2795	1019	1.66	72	80	84	3060	719	1800	2.89
12	400	50	2790	1028	1.67	73	80	85	2190	912	1290	3.66
13	400	50	1880	244	0.52	72	82	82	3245	0	1910	0.00
14	400	50	1840	320	0.65	63	72	76	2590	191	1525	0.77
15	400	50	1830	340	0.68	62	70	75	2000	308	1180	1.24
16	400	50	1830	343	0.68	63	70	75	1435	392	845	1.57

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

