

Nominal data

Type	K3G450-PA29-67	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	200
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2300
Power consumption	W	3600
Current draw	A	11
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	66.7	57.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		71.1	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	3.77
09 Air flow q_v	m ³ /h	7160
09 Pressure increase p_{fs}	Pa	1216
10 Speed (rpm) n	min ⁻¹	2315
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-206013



Technical description


Weight	37 kg
Size	450 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted black
Impeller material	Sheet aluminum, painted black
Support plate material	Sheet steel, galvanized and painted black
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized and painted black
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2+S
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.0 - Motor current limitation - RFID - ISO 15693 compatible - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1



EC centrifugal module - RadiPac


backward-curved, single-intake
with support bracket

Product drawing

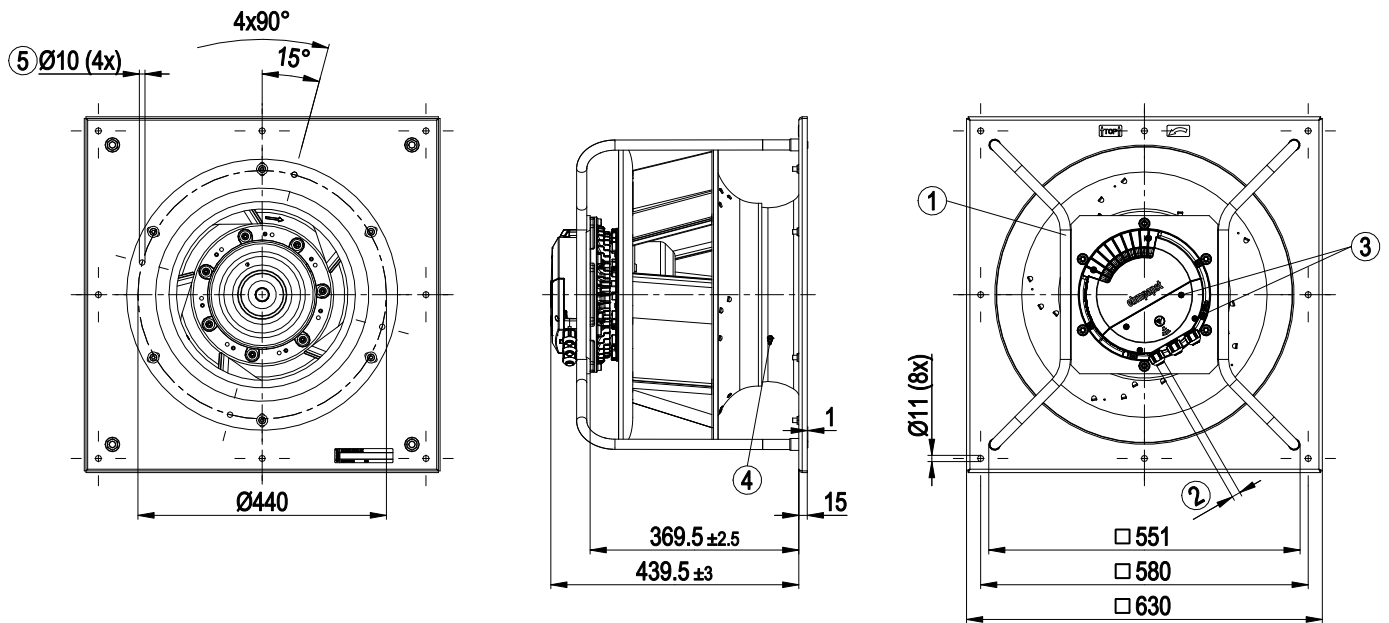

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Tightening torque 1.5 ± 0.2 Nm
4	Inlet ring with pressure tap (k-factor: 240)
5	Attachment holes for FlowGrid (35505-2-2957 not included in scope of delivery)

Connection diagram

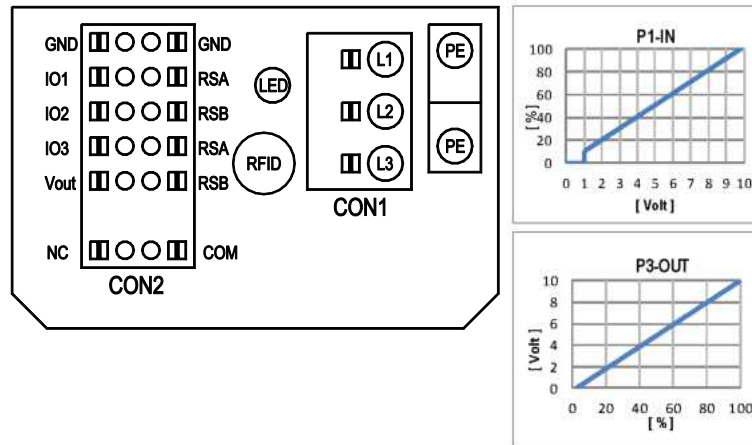

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment


○ configurable option																												
For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0																												
CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration																								
IO1	○ Din1 (active high): digital input	not active: pin open or applied voltage < 1,5VDC active: applied voltage 3,5-50VDC, SELV	D158 [0]												signal: tach out (selected directly via IO mode)		signal: fan modulation level % (selected directly via IO mode)		OUTPUT		D130 [0]	D130 [1]	D130 [2]	D130 [5]	D00C [1]	D130 [4]		
	○ Ain1 0-10V/PWM: analog input	RI=100K, characteristic curve parameterizable, f _{PWM} =1k..10KHz, SELV	D158 [2]																									
	○ Tach out (open collector output)	U _{max} =50VDC, I _{max} =20mA, SELV	D158 [5]																									
	○ Diagnostics out (open collector output)	U _{max} =50VDC, I _{max} =20mA, SELV	D158 [6]																									
IO2	○ Din2 (active high): digital input	not active: pin open or applied voltage < 1,5VDC active: applied voltage 3,5-50VDC, SELV	D159 [0]																									
	○ Ain2 0-10V/PWM: analog input	RI=100K, characteristic curve parameterizable, f _{PWM} =1k..10KHz, SELV	D159 [2]																									
	○ Ain2 4-20mA: analog input	RI=125R, characteristic curve parameterizable, SELV	D159 [3]																									
	○ Din3 (active high): digital input	not active: pin open or applied voltage < 1,5VDC active: applied voltage 3,5-50VDC, SELV	D15A [0]																									
IO3	○ Din3 (active low): digital input	not active: pin open or applied voltage < 1,5VDC active: applied voltage 3,5-50VDC, SELV	D15A [1]																									
	○ PWMIn3: digital input	not active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3,5-50VDC active: pin open or applied voltage < 1,5VDC, SELV	D15A [7]																									
	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA, max output frequency 300Hz, SELV	D15A [4]																									
	○ Tacho out (pulses), analog output	0-10V/ max. 5mA, max output frequency 300Hz, SELV	D15A [5]																									
RSA RSB	○ Diagnostics out (pulses)	0-10V/ max. 5mA, max output frequency 300Hz, SELV	D15A [6]																									
	RS485 bus connection,	MODBUS RTU, specification V6.0, SELV																										
Yout	voltage output	voltage parameterizable 3.3...24VDC +/- 5,5%, P _{max} =800mW, short-circuit-proof, supply for external devices, SELV	D16E [..]																									
	alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...50VDC																										

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0



Curves: Air performance 50 Hz

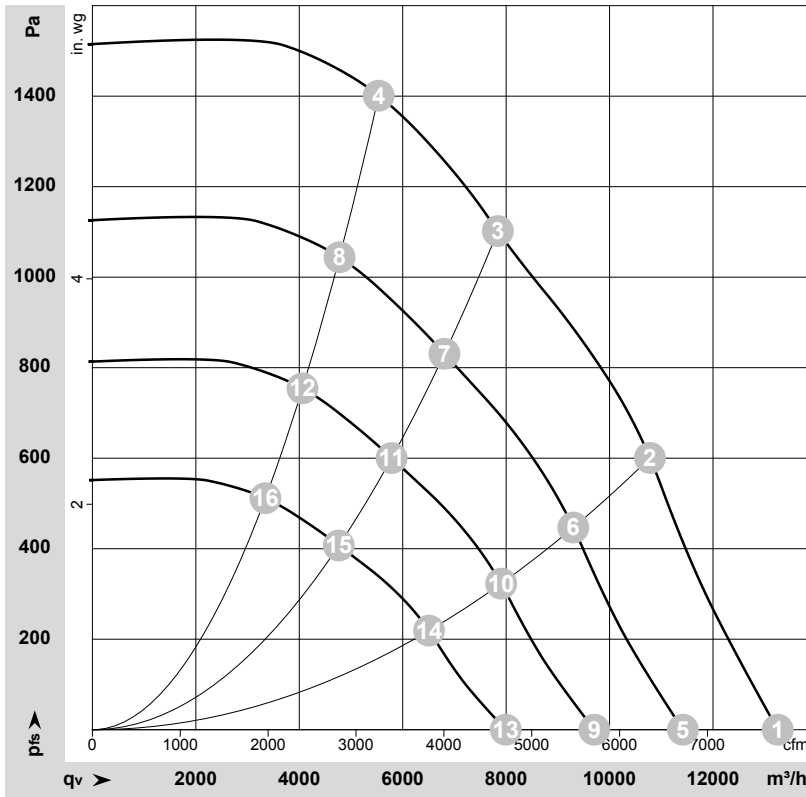

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-206013-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	200	50	2300	2326	7.07	89	96	97	13250	0	7800	0.00
2	3~	200	50	2300	3392	10.26	81	89	91	10780	600	6345	2.41
3	3~	200	50	2300	3850	11.60	75	82	88	7840	1100	4615	4.42
4	3~	200	50	2300	3678	11.11	81	87	91	5535	1400	3260	5.62
5	3~	200	50	2000	1488	4.53	85	93	93	11420	0	6720	0.00
6	3~	200	50	2000	2173	6.58	78	85	88	9300	449	5475	1.80
7	3~	200	50	2000	2502	7.57	72	79	85	6805	831	4005	3.34
8	3~	200	50	2000	2367	7.15	77	83	88	4780	1049	2810	4.21
9	3~	200	50	1700	914	2.78	81	89	89	9705	0	5715	0.00
10	3~	200	50	1700	1335	4.04	73	81	83	7905	325	4650	1.30
11	3~	200	50	1700	1537	4.65	68	75	80	5785	600	3405	2.41
12	3~	200	50	1700	1453	4.39	73	79	83	4060	758	2390	3.04
13	3~	200	50	1400	510	1.55	76	84	84	7995	0	4705	0.00
14	3~	200	50	1400	745	2.26	69	76	79	6510	220	3830	0.88
15	3~	200	50	1400	858	2.60	63	70	76	4765	407	2805	1.63
16	3~	200	50	1400	812	2.45	68	74	79	3345	514	1970	2.06

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

