

K3G500-RI87-22 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K3G500-RI87-22	
Motor	M3G112-IA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed	min ⁻¹	1420
Power input	W	1590
Current draw	A	6.9
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.01

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}	%	61.1	49.6	53.6
Efficiency grade N		69.5	58	62
Power input P_{ed}	kW	1.58		
Air flow q_v	m ³ /h	5485		
Pressure increase p_{fs}	Pa	594		
Speed n	min ⁻¹	1415		

Data definition with optimum efficiency. LU-133256
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.




Technical features

Mass	34 kg
Size	500 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	PP plastic
Material of mounting plate	Sheet steel, galvanised
Material of support bracket	Steel, coated in black
Material of inlet nozzle	ABS plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Refer to product drawing
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Tach output - Input for sensor 0-10 V or 4-20 mA - Alarm relay - Integrated PID controller - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Electrical leads	Via terminal box
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1; CE
Approval	EAC

EC centrifugal module - RadiCal®


backward curved, single inlet
with support bracket

Product drawing

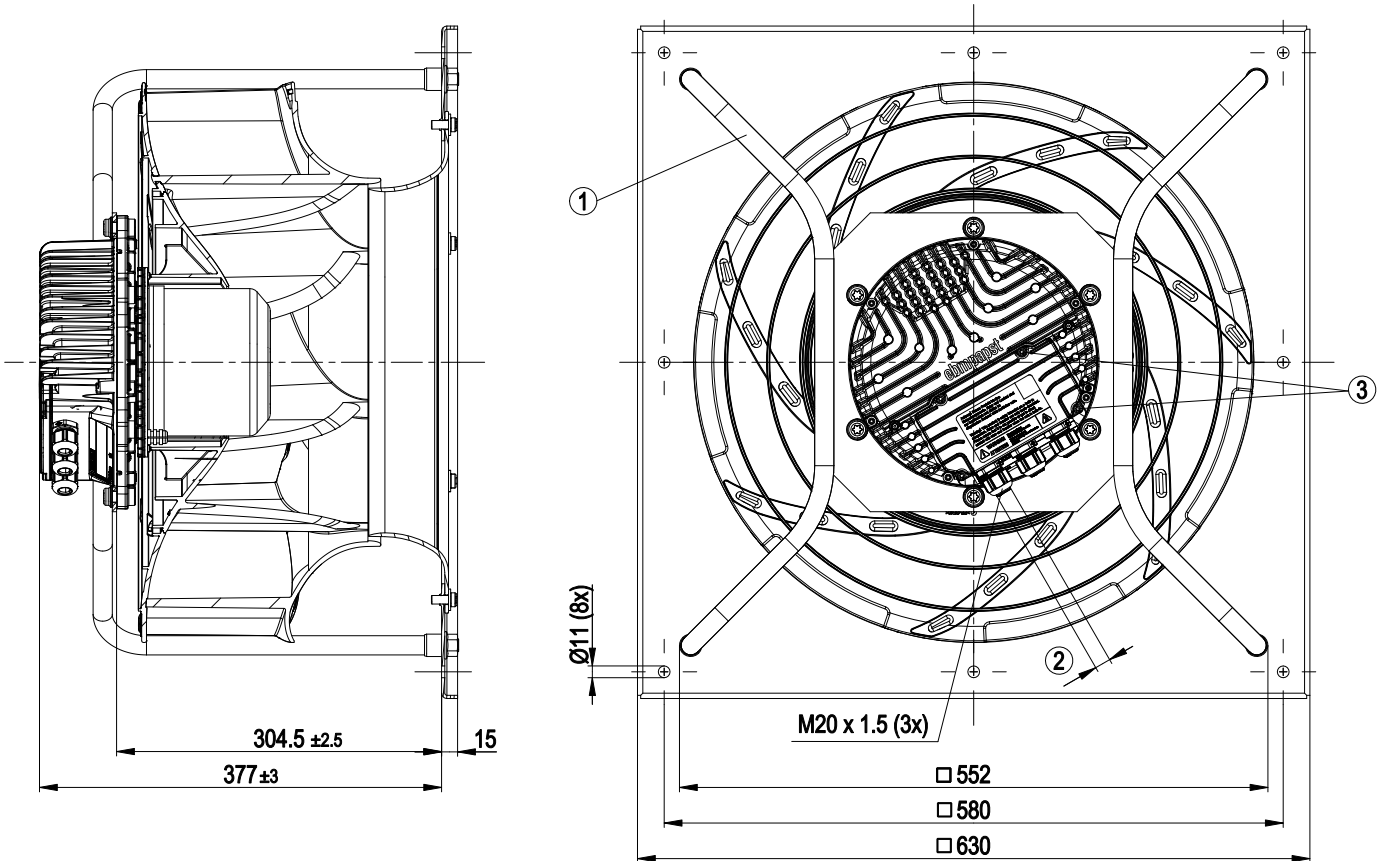


1	Mounting position: shaft horizontal (install the support struts only vertically as shown in the view!) or rotor on bottom, rotor on top on request
2	Cable diameter: min. 4 mm, max. 10 mm, tightening torque: 4 ± 0.6 Nm
3	Tightening torque 3.5 ± 0.5 Nm

Connection screen

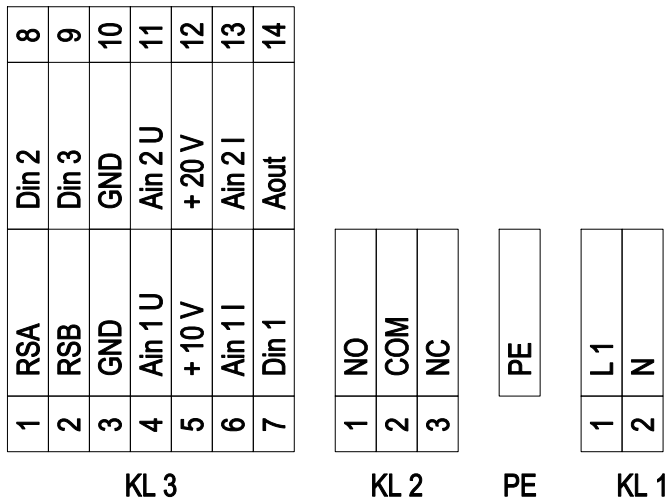

No.	Conn.	Designation	Function / assignment
KL1	1	L1	Mains supply connection, supply voltage 1~200-277 V AC; 50/60 Hz
KL1	2	N	Mains supply connection, supply voltage 1~200-277 V AC; 50/60 Hz
PE		PE	Earth connection, PE connection
KL2	1	NO	Status relay, floating status contact; option 1: close with error; option 2: close with run monitor error message
KL2	2	COM	Status relay; floating status contact; changeover contact; common connection; contact rating 250 VAC / max. 2 A (AC1) / min. 10 mA
KL2	3	NC	Status relay, floating status contact; option 1: break with error; option 2: break with error for run monitor error message
KL3	1	RSA	Bus connection RS485; RSA; MODBUS RTU
KL3	2	RSB	Bus connection RS485; RSB; MODBUS RTU
KL3	3	GND	Signal ground for control interface
KL3	4	Ain1 U	Analog input 1 (set value); 0-10 V; Ri= 100kOhm; parametrisable curve; only usable as alternative to input Ain1 I
KL3	5	+10 V	Fixed voltage output 10 VDC; + 10 V +/-3%; max. 10 mA; short circuit proof; power supply for ext. devices (e.g. potentiometer)
KL3	6	Ain1 I	Analog input 1 (set value); 4-20 mA; Ri= 100 Ohm; parametrisable curve; only usable as alternative to input Ain1 U
KL3	7	Din1	Digital input 1: enabling of electronics; enabling: open pin or applied voltage 5 to 50 VDC; disabling: bridge to GND or applied voltage < 0.8 VDC; reset function: triggers software reset after a level change to <0.8 V
KL3	8	Din2	Digital input 2: parameter set switch 1/2; according to EEPROM setting, the valid/used parameter set is selectable per BUS or per digital input DIN2. Parameter set 1: open pin or applied voltage 5 to 50 VDC; parameter set 2: bridge to GND or applied voltage < 0.8 VDC
KL3	9	Din3	Digital input 3: control characteristic of the integrated controller; according to EEPROM setting, the control characteristic of the integrated controller is normally/inversely selectable per BUS or per digital input; normal: open pin or applied voltage 5 to 50 VDC; inverse: bridge to GND or applied voltage < 0.8 VDC
KL3	10	GND	Signal ground for control interface
KL3	11	Ain2 U	Analog input 2; actual sensor value 0-10 V; Ri= 100kOhm; parametrisable curve; only usable as alternative to input Ain2 I
KL3	12	+20 V	Fixed voltage output 20 VDC; + 20V +/-5/-10%; max. 50 mA; short circuit proof; power supply for ext. devices (e.g. sensors)
KL3	13	Ain2 I	Analog input 2; actual sensor value 4-20 mA; Ri= 100 Ohm; parametrisable curve; only alternative to input Ain2 U
KL3	14	Aout	Analogue output 0-10 V; max. 5 mA; output of the actual motor control factor (output voltage of electronics)/ of the actual motor speed. Parametrisable curve.

Charts: Air flow 50 Hz

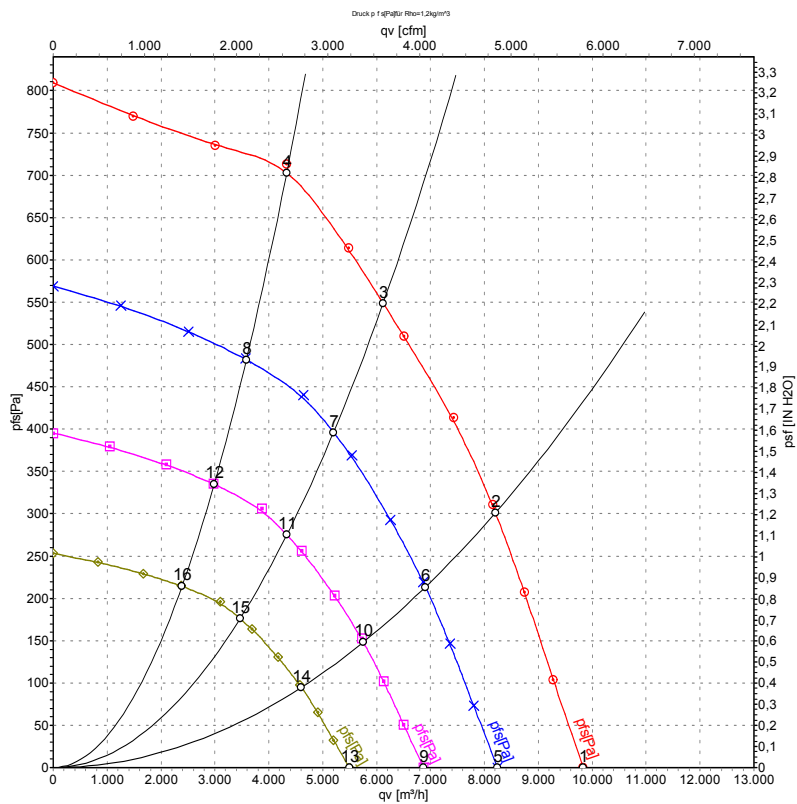

Measurement: LU-133256

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa
1	230	50	1420	1103	4.82	73	81	88	9830	0
2	230	50	1420	1464	6.38	69	76	84	8205	300
3	230	50	1420	1590	6.90	66	73	80	6120	550
4	230	50	1420	1577	6.88	66	75	80	4330	700
5	230	50	1200	650	2.84	70	77	84	8245	0
6	230	50	1200	872	3.80	65	73	80	6905	215
7	230	50	1200	973	4.25	62	70	76	5200	396
8	230	50	1200	883	3.85	62	70	76	3585	483
9	230	50	1000	376	1.65	66	73	80	6870	0
10	230	50	1000	505	2.20	61	69	76	5755	149
11	230	50	1000	563	2.46	58	66	72	4335	275
12	230	50	1000	511	2.23	58	66	72	2985	335
13	230	50	800	193	0.84	61	68	75	5495	0
14	230	50	800	258	1.13	57	64	71	4605	96
15	230	50	800	288	1.26	54	61	67	3465	176
16	230	50	800	262	1.14	53	62	67	2390	215

U = Supply voltage · f = Frequency · n = Speed · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · LwA_{out} = Sound power level outlet side

qv = Air flow · p_{fs} = Pressure increase