

W3G300-BV25-27

EC axial fan

with brushless DC motor
Automotive



W3G300-BV25-27 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G300-BV25-27	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Type of data definition		fa
Speed (rpm)	min ⁻¹	3940
Power input	W	380
Current draw	A	14.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85
- with power derating up to	°C	110

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	2 kg
Size	300 mm
Motor size	84
Material of impeller	PA plastic
Material of wall ring	Plastic, PA
Number of blades	7
Direction of air flow	V
Balance quality according to DIN ISO 1940-1	G 10
Direction of rotation	Clockwise, seen on rotor
Protection rating	IP 24 KM
Type of protection	(motor); electronics IP 6K9K
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H4
Note ambient temperature	Over +85° C with power derating
Max. permissible ambient motor temp. (transp./ storage)	+110 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensation drainage holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancies	40,000 h (typical)
Technical features	- Lowering input - Fault output (high-side switch max. 30 mA) - INVLIN (control input, inverse linear) - Output limit - Load dump (58 V) - Motor current limit - Soft start - Control input 0-10 VDC/PWM - Temperature derating - Overvoltage detection - Excess temperature protection for electronics - Undervoltage detection
EMC directives	According to ECE R10 Rev. 3
Electrical connection	Plug
Electrical leads	Standby current less than 500 µA
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Lateral
Approval	E1

EC axial fan

with brushless DC motor

Automotive

Product drawing

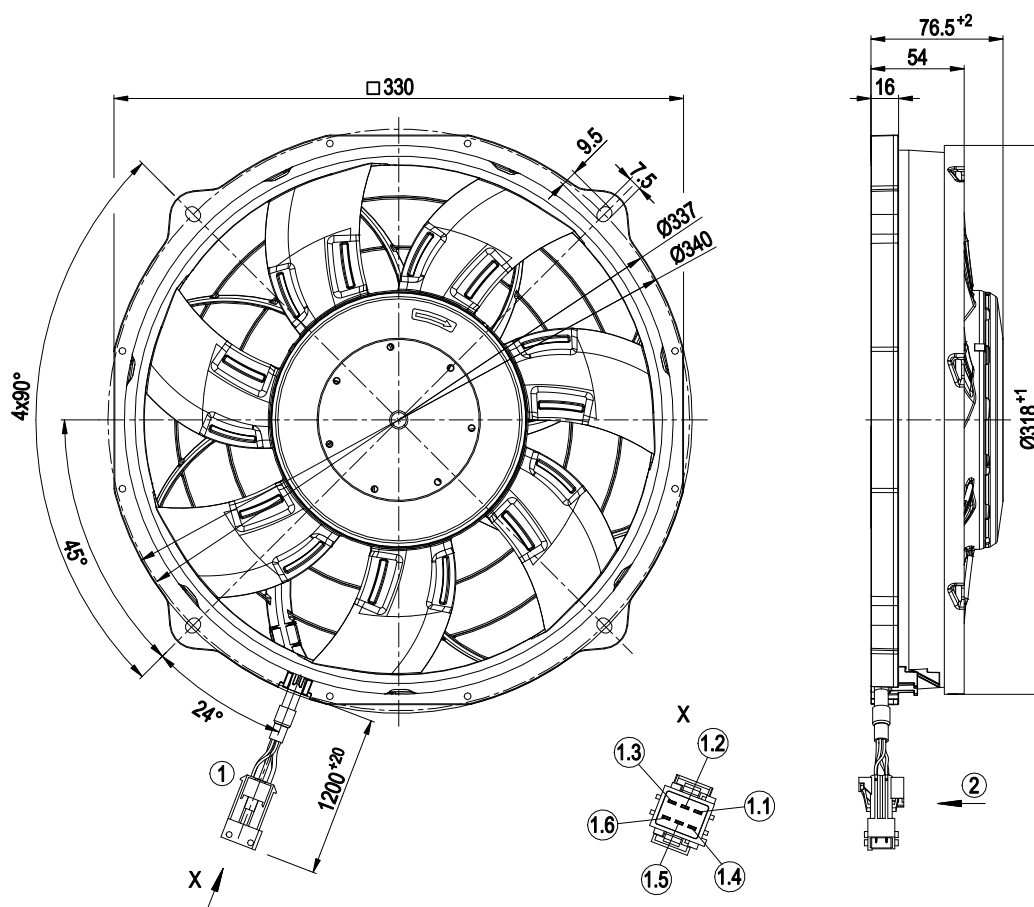

1 Connection line with plug tyco Junior Power Timer 1-962349-1, 6-pole, coded

Mating connector tyco 1-963212-1 not included in scope of delivery

1.1 + UB (black)

1.2 GND (brown)

1.3 PWM/LIN (yellow)

1.4 INVLIN (orange)

1.5 ABSENK (blue)


1.6 Diagnostic output (white)

2 Direction of air flow "V"

EC axial fan

with brushless DC motor
Automotive

Connection screen

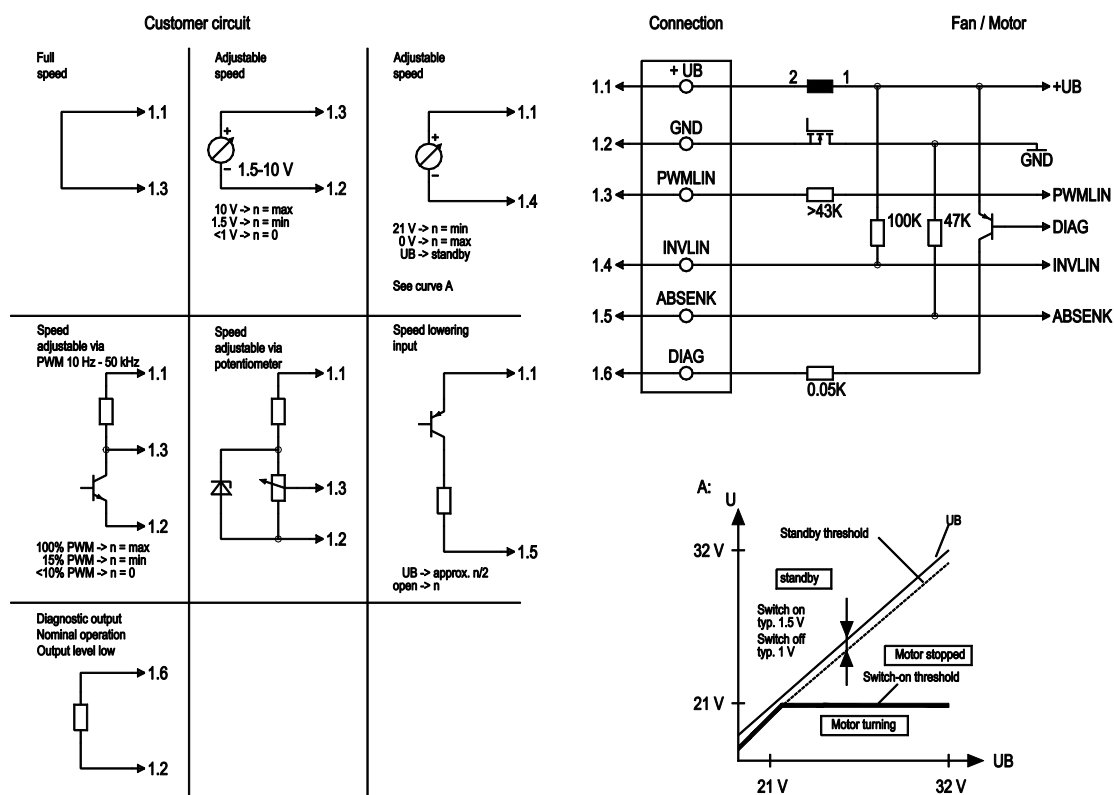


No.	Conn.	Designation	Function / assignment
	1.1	+UB	Power supply
	1.2	GND	Power supply GND, reference earth
	1.3	PWMLIN	Analogue voltage control input 0-10 V or PWM
	1.4	INVLIN	Control input, inverse linear
	1.5	ABSENK	Lowering input
	1.6	DIAG	Diagnostic output

EC axial fan

with brushless DC motor
Automotive

Charts: Air flow

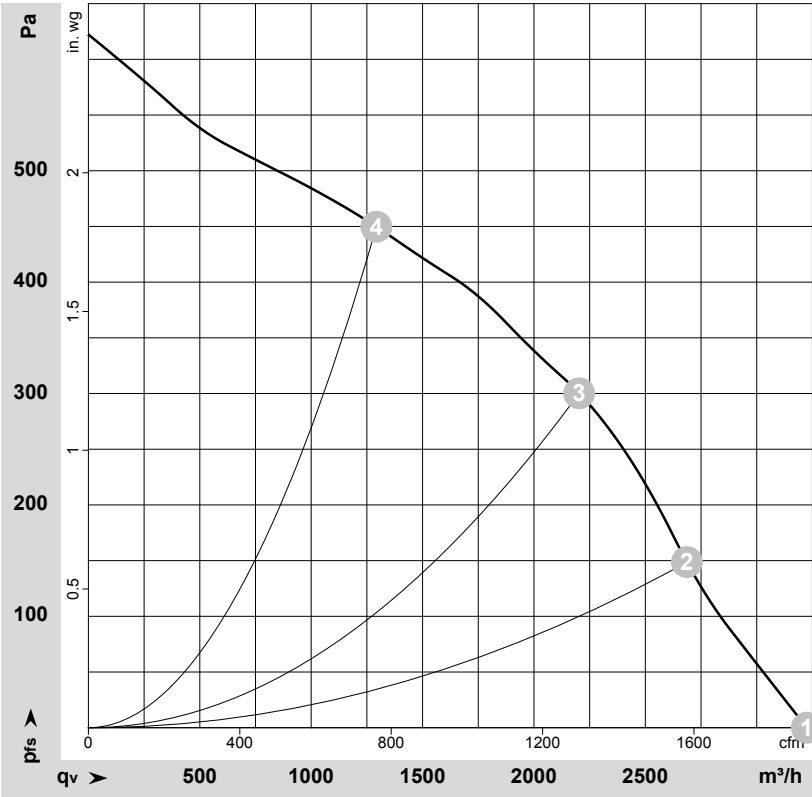

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-141116-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	26	3940	380	14.60	79	87	3225	0	1900	0.00
2	26	3820	405	15.55	79	87	2685	150	1580	0.60
3	26	3725	460	17.63	78	86	2205	300	1295	1.20
4	26	3620	504	19.36	82	89	1295	450	760	1.81

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow · p_{fs} = Pressure increase

