

EC axial fan

with brushless DC motor
Automotive



W3G300-PW24-01 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	W3G300-PW24-01	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Type of data definition		fa
State		prelim.
Speed (rpm)	min ⁻¹	3000
Power input	W	200
Current draw	A	7.7
Max. back pressure	Pa	320
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	85
- with power derating up to	°C	105

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

		Actual	Request 2015
01 Overall efficiency η_{es}	%	47.4	30.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		57	40
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_e	kW	0.3
09 Air flow q_v	m³/h	2000
09 Pressure increase p_{fs}	Pa	231
10 Speed (rpm) n	min ⁻¹	3015
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-177349



Technical features


Mass	2.0 kg
Size	300 mm
Material of impeller	Plastic, PA UL94 HB (black)
Material of wall ring	Plastic, PA
Number of blades	9
Direction of air flow	"A"
Balance quality according to DIN ISO 1940-1	G 10
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 24 KM; (motor); electronics IP 6K9K
Insulation class	"B"
Humidity (F)/environmental protection class (H)	H4
Max. permissible ambient motor temp. (transp./ storage)	+110 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancies	40,000 h (typical)
Technical features	- Lowering input - Fault output (high-side switch max. 30 mA) - INVLIN (control input, inverse linear) - Output limit - Load dump (58 V) - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Over-temperature protected electronics - Line undervoltage detection
Electrical leads	With plug; Standby current less than 500 µA
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Lateral
Approval	EAC
Noise level	86 dB(A), sound power level as per ISO 13347

EC axial fan

with brushless DC motor

Automotive

Product drawing

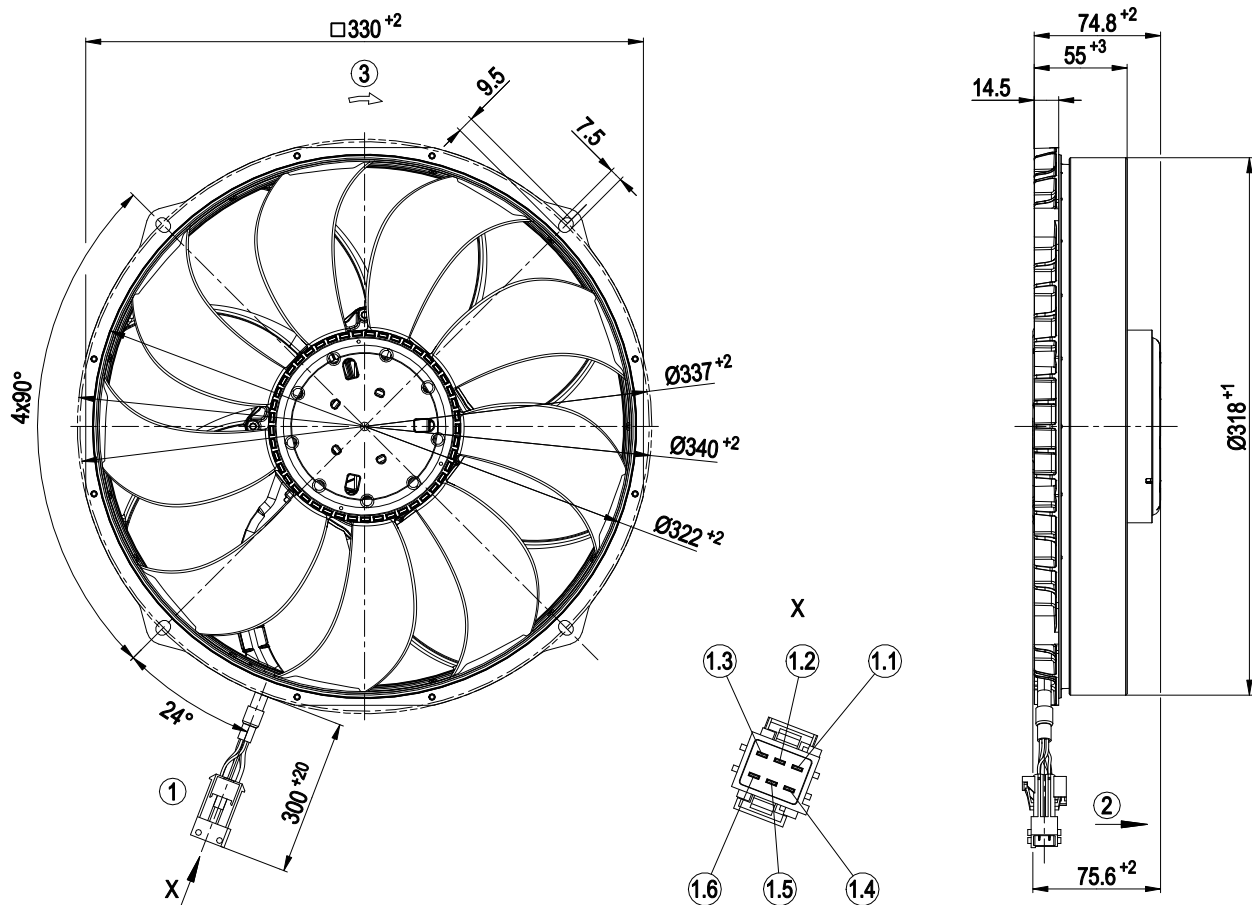


1	Connection line with plug tyco Junior Power Timer 1-962349-1, 6-pole, coded
	Connection line (460 mm) with mating connector part no. 02002-4-1021 not included in scope of delivery
1.1	+ UB (black)
1.2	GND (brown)
1.3	PWM/LIN (yellow)
1.4	INVLIN (orange)
1.5	ABSENK (blue)
1.6	Diagnostic output (white)
2	Direction of air flow "A"
3	Direction of rotation clockwise, viewed towards rotor

EC axial fan

with brushless DC motor
Automotive


Connection screen

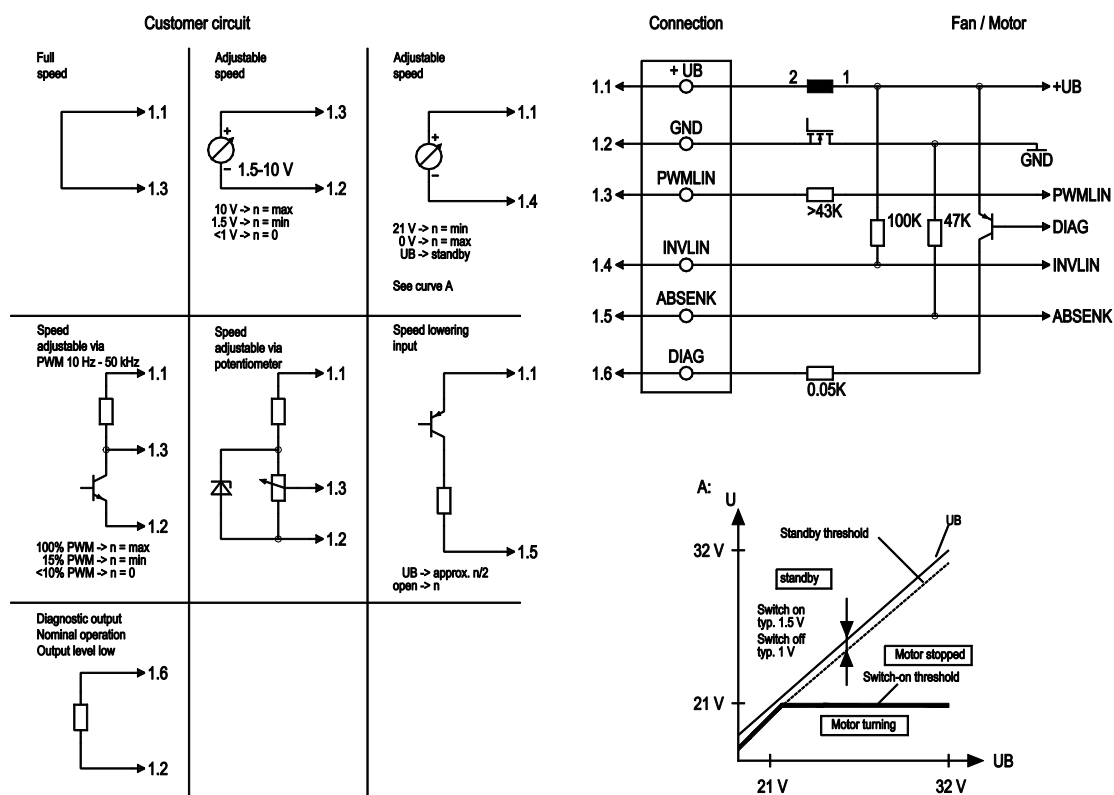

No.	Conn.	Designation	Function / assignment
	1.1	+UB	Power supply
	1.2	GND	Power supply GND, reference earth
	1.3	PWMLIN	Analogue voltage control input 0-10 V or PWM
	1.4	INVLIN	Control input, inverse linear
	1.5	ABSENK	Lowering input
	1.6	DIAG	Diagnostic output

EC axial fan
with brushless DC motor
Automotive

Charts: Air flow

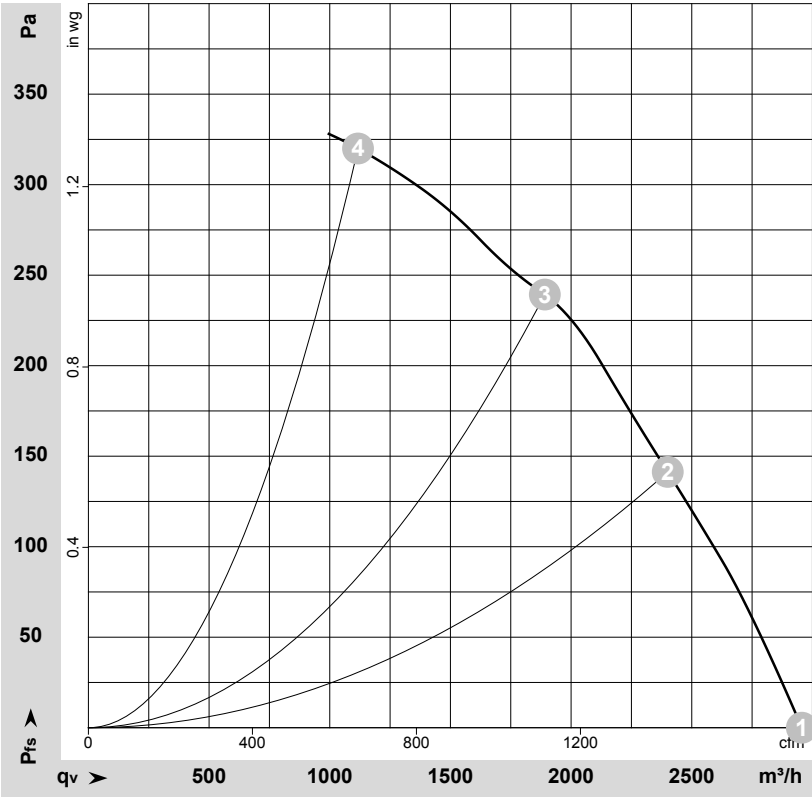

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-173433-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{wA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH2O
1	26	3000	200	7.70	79	86	2955	0	1740	0.00
2	26	2980	263	10.10	78	85	2400	140	1415	0.56
3	26	3010	310	11.93	75	83	1890	240	1115	0.96
4	26	2950	333	12.80	76	84	1115	320	655	1.28

U = Supply voltage · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow · p_{fs} = Pressure increase

