



## Specification For Approval

Customer : \_\_\_\_\_ STD \_\_\_\_\_  
Description : \_\_\_\_\_ EC FAN \_\_\_\_\_  
Customer Part No. : \_\_\_\_\_ Rev : \_\_\_\_\_  
Delta Model No. : \_\_\_\_\_ GTM019FUA07R-V \_\_\_\_\_ Rev : 00  
Safety Model No. : \_\_\_\_\_ GTM019FUA07 \_\_\_\_\_  
Sample Issue No. : \_\_\_\_\_  
Sample Issue Date : \_\_\_\_\_ 08/22/2019 \_\_\_\_\_

Please send one copy of this specification back after you signed approval for production pre-arrangement

Approved by : \_\_\_\_\_

Date : \_\_\_\_\_

## Electronically Commutated (EC) Fan

### Centrifugal Fan

225 x 225 x 85 mm



GTM019FUA07R-V Delta Datasheet  
sales@fansco.com  
www.fansco.com

RoHS


## Technical features

Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 240Vac
Power @ Free air	85 W
Power @ Max. load	85 W
Output Side	
Speed (RPM)	3100
Qmax. (CMH / CFM)	754 / 443
Pmax. (Pa / inAq)	841 / 3.38
Noise (dB-A) @ Qmax.	70
Functions	
Control input 0-10VDC / PWM pattern.	
Output +10VDC ( $\pm 10\%$ ), max. 5mA.	
Locked rotor protection, Soft start.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Plastic / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	1.8
Electrical leads	Lead wire
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +80 °C
Safety	
Safety	UL; cUL; TUV
IP Level	IP54
EMC	EN61000-6-1/3, EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	$\leq 3.5$ mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE: Delta reserves the right to change specifications and other product information without prior notice.

## P &amp; Q curves

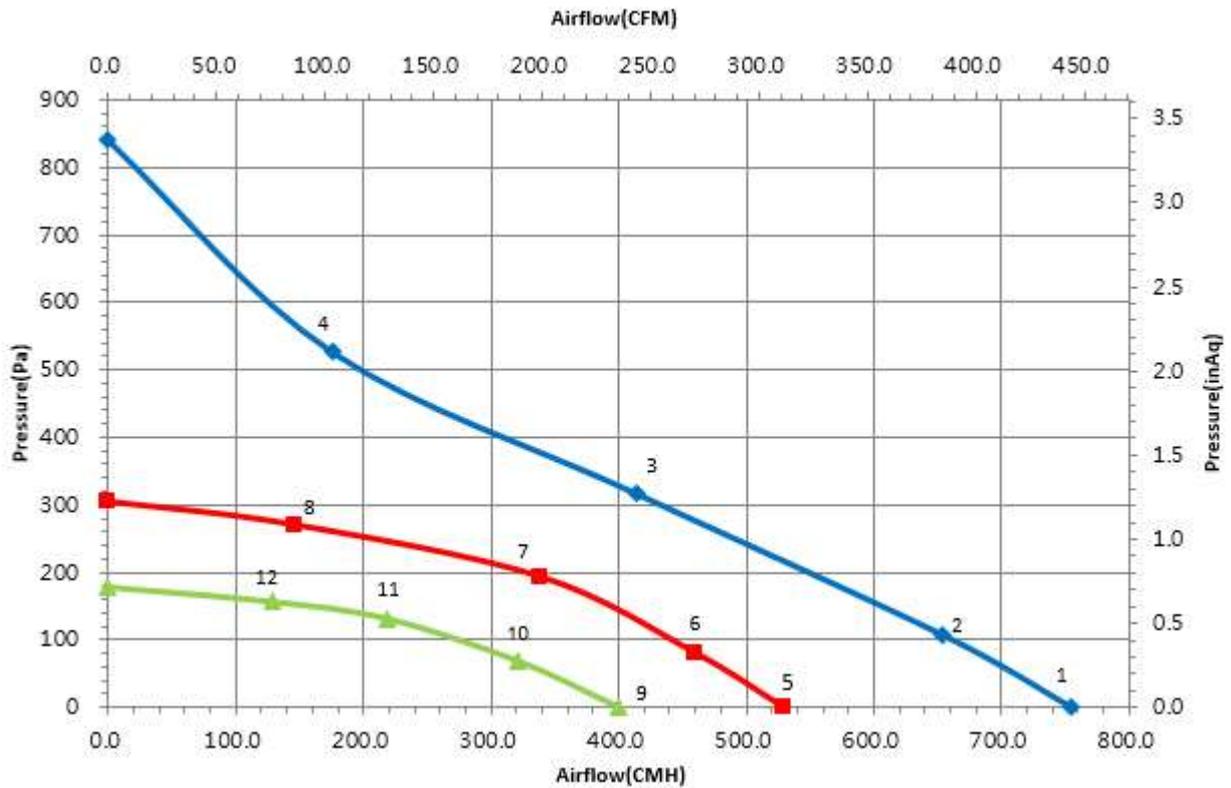

## Measure data:

	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	754	3554	82	0.63	70
2	107	653	3366	82	0.63	68
3	317	413	3107	82	0.63	63
4	526	176	3474	82	0.63	69
5	0	529	2504	30	0.29	62
6	81	459	2493	35	0.33	60
7	193	339	2493	41	0.37	58
8	270	146	2493	32	0.31	59
9	0	400	1904	14	0.15	57
10	69	320	1903	18	0.19	54
11	131	219	1900	19	0.19	53
12	156	128	1905	16	0.17	53

## Test Condition:


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone
- Noise (Lp) is measured at a distance of one meter from the inlet side.

Dimension drawing

Label :




Fan :

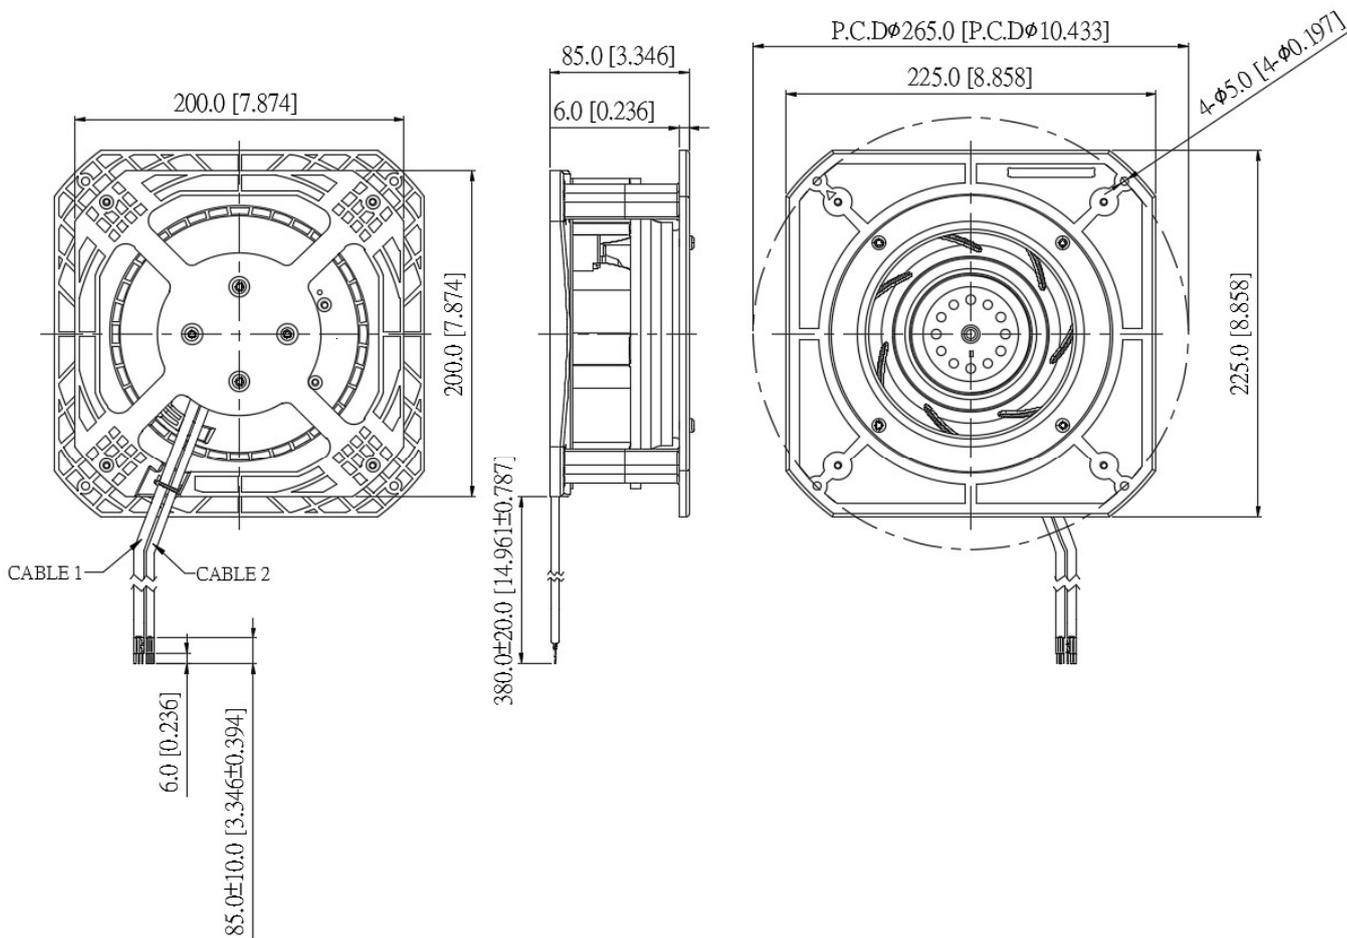


UNIT : mm[INCH]



## Definition of terminal block

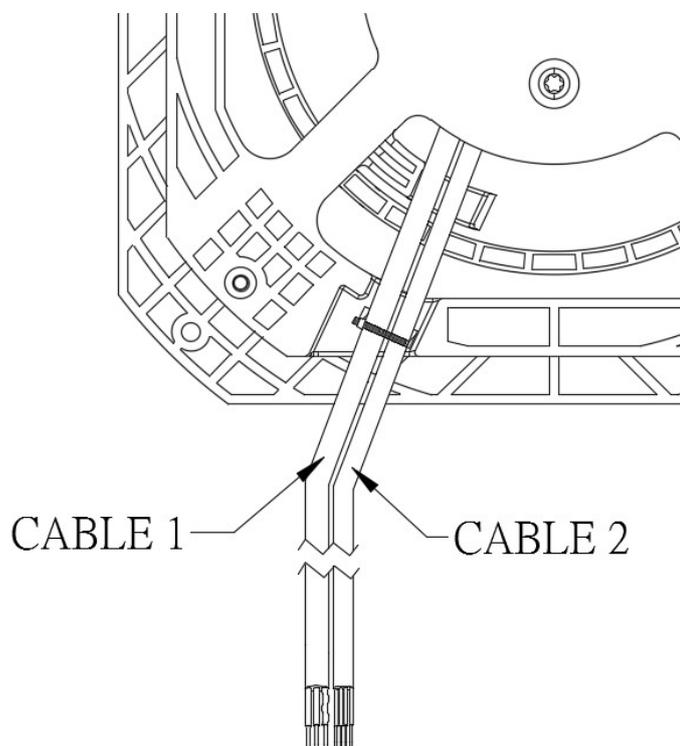


Cable	Wire Type	Color	Functions
1	UL2464 18#AWG	Brown	Line / AC main
		Blue	Neutral /AC main
		Green / Yellow	Protective Earth
2	UL2464 24#AWG	Green	Ground
		Red	+10V output
		White	F00
		Yellow	0-10VDC / PWM


Lead wire connection:

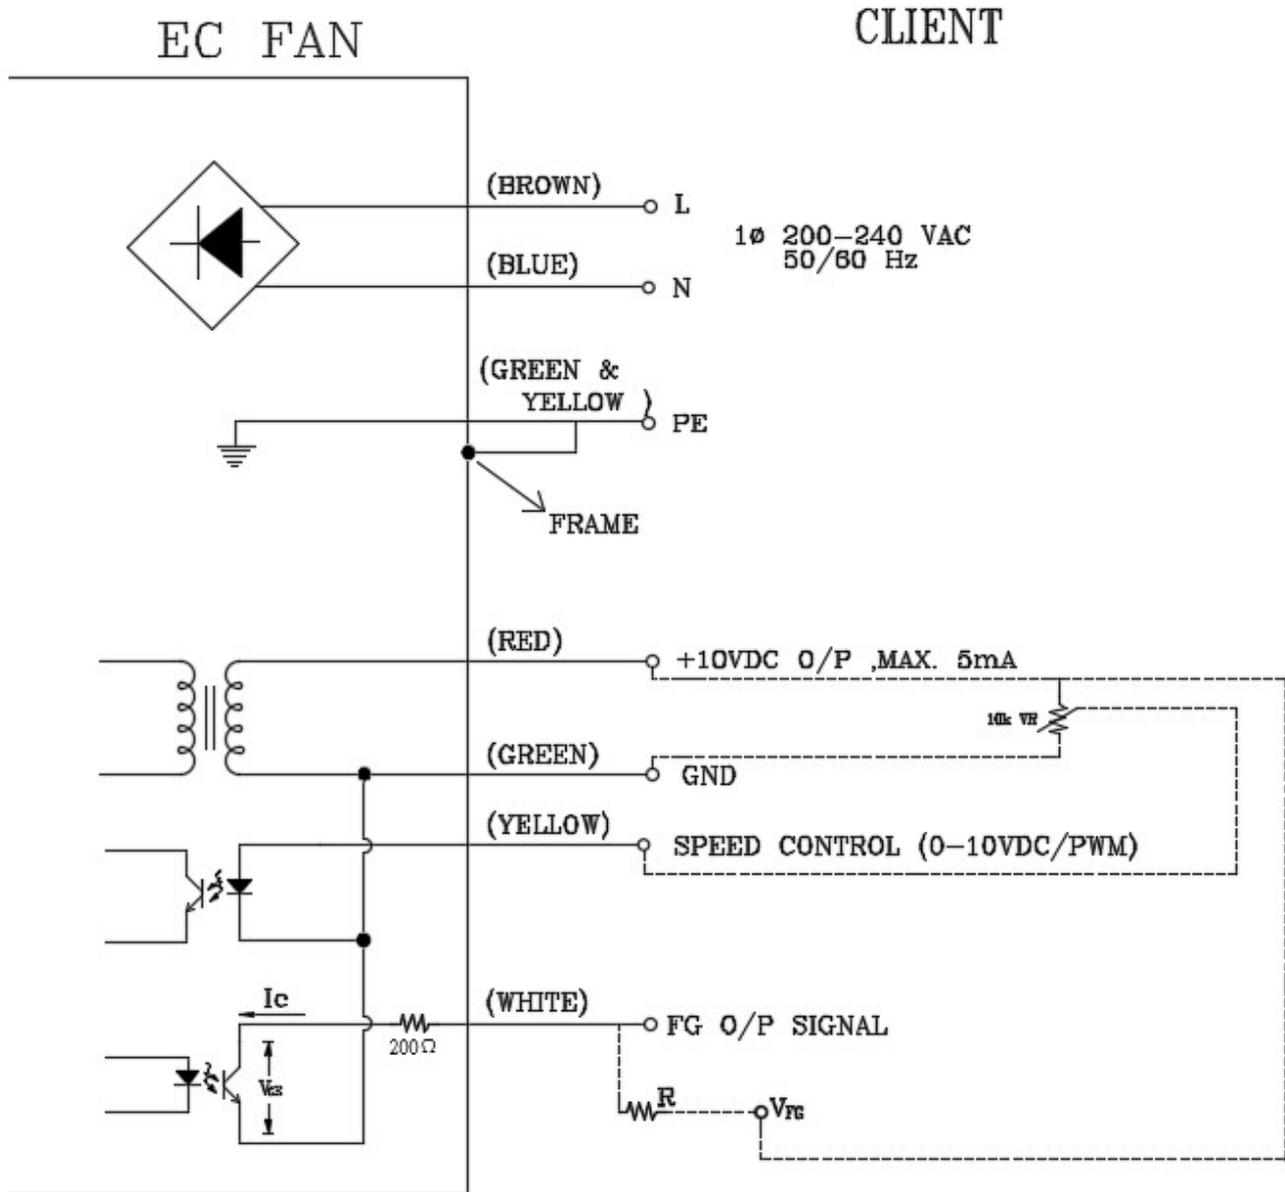

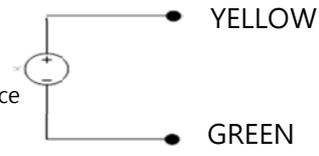Speed setting	
<p><b>Full Speed</b></p> 	<p><b>Short RED &amp; YELLOW</b> Fan will run full speed.</p>
<p><b>Voltage Control</b></p> 	<p><b>Use voltage source support 0~10VDC voltage</b> DC+ : connect to YELLOW DC - : connect to GREEN -Voltage higher than 1.0 VDC, fan start up. -Voltage lower than 0.5 VDC , fan stop</p>
<p><b>PWM Control</b></p> 	<p><b>PWM duty control</b> PWM amplitude is 10VDC(+/-5%) Frequency Range is 100Hz ~ 100kHz -PWM duty higher than 10%, fan start up ° -PWM duty lower than 5%, fan stop °</p>

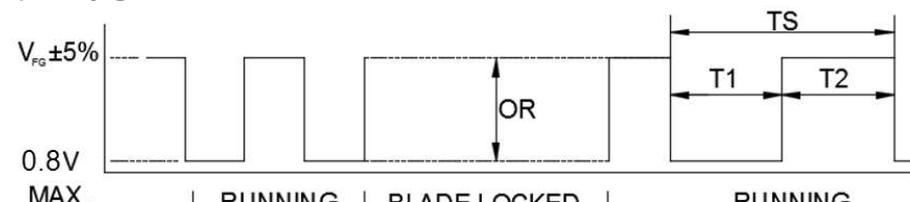Signal function													
<p><b>Voltage / PWM control</b></p>	<p>The speed comparison will control level.</p> <table border="1"> <thead> <tr> <th>Voltage (V)</th> <th>PWM(%)</th> <th>Speed (RPM) (REF)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td>1</td> <td>420 ± 50RPM</td> </tr> <tr> <td>10</td> <td>99</td> <td>3100<sup>(1)</sup> ± 5%</td> </tr> </tbody> </table> <p>(1) Depending on power consumption conditions, speed might be different.</p>	Voltage (V)	PWM(%)	Speed (RPM) (REF)	0	0	0	1	1	420 ± 50RPM	10	99	3100 <sup>(1)</sup> ± 5%
Voltage (V)	PWM(%)	Speed (RPM) (REF)											
0	0	0											
1	1	420 ± 50RPM											
10	99	3100 <sup>(1)</sup> ± 5%											
<p><b>FG</b></p>	<p><math>V_{CE(sat)} = 0.8V \text{ MAX.}</math>      <math>V_{FG} = 30.0V \text{ MAX.}</math>  <math>I_C = 5mA \text{ MAX.}</math>      <math>R \geq V_{FG} / I_C</math></p> <p><b>Frequency generator waveform</b></p>  <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p><math>N = R.P.M</math>      1 PULSE PER REVOLUTION  <math>TS = 60/N(\text{SEC})</math>      <math>T1 = T2 = 1/2 TS</math></p> </div>												

## Control Voltage VS. RPM Curve

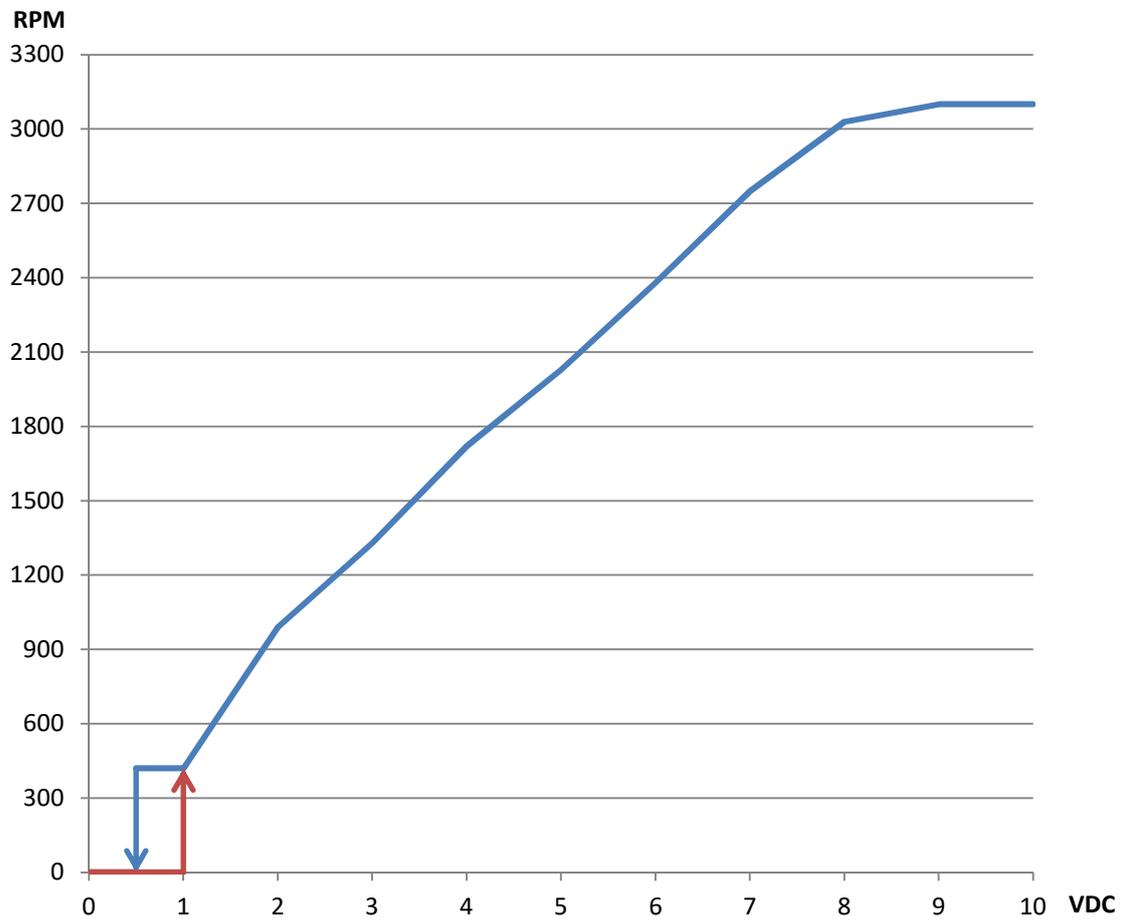

Voltage (VDC), PWM duty ( % ) table

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%

Note: If the fan is used on heavy load, the speed will be limited by power consumption.