



The engineer's choice

**ebmpapst**

3214 J/2H3F-191

INDEX

- 1 General ..... 3**
- 2 Mechanics ..... 3**
  - 2.1 General ..... 3
  - 2.2 Connections ..... 3
- 3 Operating Data ..... 4**
  - 3.1 Operating Data - Electrical Interface - Input ..... 4
  - 3.2 Electrical Operating Data ..... 5
  - 3.3 Operating Data - Electrical Interface -Output ..... 6
  - 3.4 Electrical Features ..... 7
  - 3.5 Aerodynamic ..... 8
  - 3.6 Sound Data ..... 9
- 4 Environment ..... 9**
  - 4.1 General ..... 9
  - 4.2 Climatic requirements\*) ..... 9
- 5 Safety ..... 10**
  - 5.1 Electrical Safety ..... 10
  - 5.2 Approval Tests ..... 10
- 6 Reliability ..... 10**
  - 6.1 General ..... 10

## 1 General

Fan type	Fan	
Rotational direction looking at rotor	clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	


## 2 Mechanics

### 2.1 General

Width	92,0 mm	
Height	92,0 mm	
Depth	38,0 mm	
Weight	0,240 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 30 Ncm remaining corners: 30 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

### 2.2 Connections

Electrical connection	Wires	
Length of lead wire	310 mm	
Tolerance	+/- 10,0 mm	
Wire gauge (AWG)	24	
Insulation diameter	1,55 mm	
Contact	see drawing	

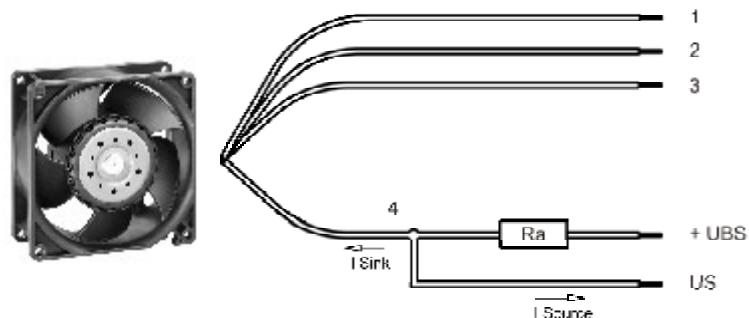

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	FREQ
Wire 4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.


### 3 Operating Data

#### 3.1 Operating Data - Electrical Interface - Input

Control input	Frequency
---------------	-----------

#### Features

Input type	TTL	
Input frequency range		116 Hz - 350 Hz

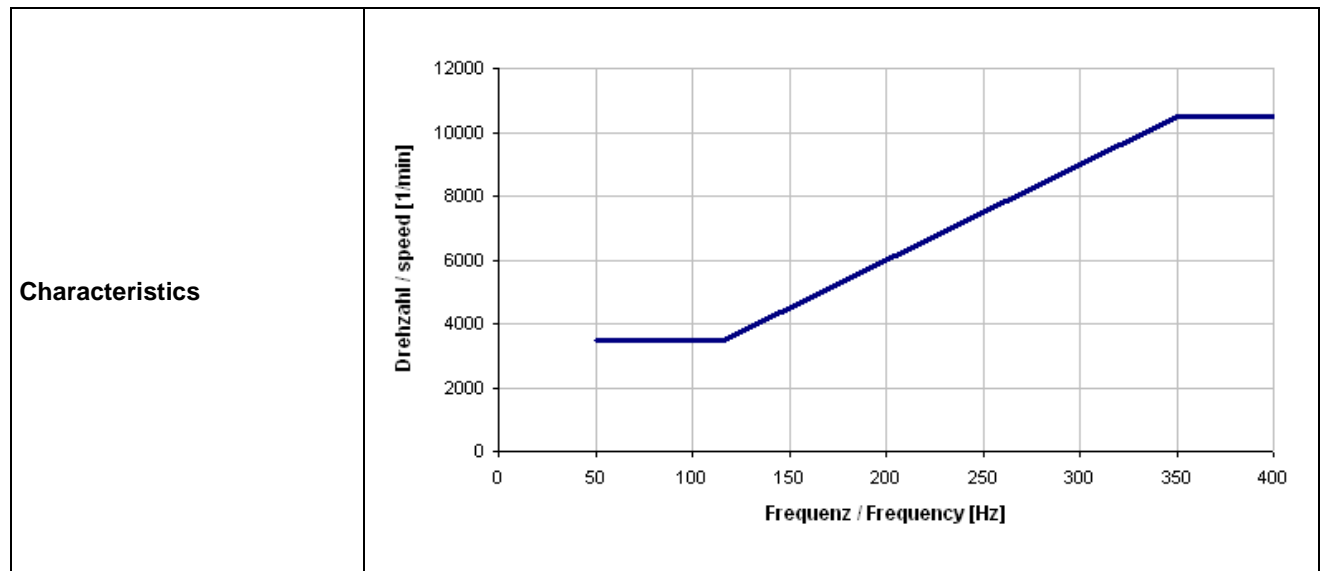

**Attention: Important information to the speed control!**

116... 350 Hz; TTL Logik; 3.500... 10.500 1/min  
 0 Hz... 50 Hz -> not permitted, because:  
 0 Hz (high level), 0 1/min and  
 0 Hz (low level), 10.500 1/min

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see section 3.5)  
 I: corresp. to arithm. mean current value

Name	Condition
Frequency 0001	Frequency: 350 Hz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	20,0 V		26,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	20,0 W	28,3 W	31,2 W
Tolerance	Frequency 0001		+/- 18,0 %	+/- 25,0 %	+/- 25,0 %
Current consumption	$\Delta p = 0$	I	1.000 mA	1.180 mA	1.200 mA
Tolerance	Frequency 0001		+/- 18,0 %	+/- 25,0 %	+/- 25,0 %
Speed	$\Delta p = 0$	n	9.250 1/min	10.500 1/min	10.500 1/min
Tolerance	Frequency 0001		+/- 13,0 %	+/- 3,0 %	+/- 3,0 %
Starting current consumption				<= 5.000 mA	

Name	Condition
Frequency 0002	Frequency: 116 Hz


Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	20,0 V		26,0 V
Nominal voltage	$\Delta p = 0$	$U_N$		24,0 V	
Power consumption	$\Delta p = 0$	P	3,4 W	3,8 W	4,2 W
Tolerance	Frequency 0002		+/- 25,0 %	+/- 25,0 %	+/- 25,0 %
Current consumption	$\Delta p = 0$	I	170 mA	160 mA	160 mA
Tolerance	Frequency 0002		+/- 25,0 %	+/- 25,0 %	+/- 25,0 %
Speed	$\Delta p = 0$	n	3.500 1/min	3.500 1/min	3.500 1/min
Tolerance	Frequency 0002		+/- 3,0 %	+/- 3,0 %	+/- 3,0 %

### 3.3 Operating Data - Electrical Interface -Output

Tacho type	/2 (Open collector)
------------	---------------------

Signal-Ausgangsspannung / *Signal output voltage*

$$R_a = \frac{U_{BS} - U_{S\ Low}}{I_{Sink}}$$

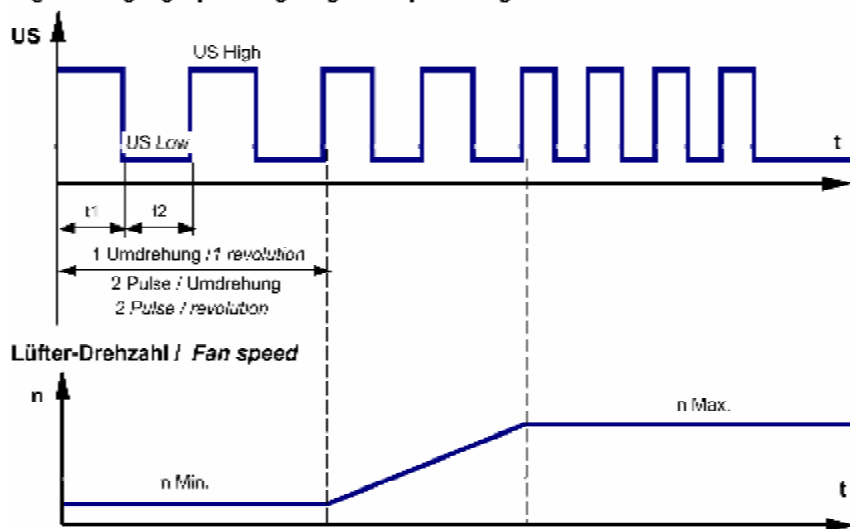


Features	Note	Values
Tacho operating voltage (UBS)		<= 60,0 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V
Tacho signal High	I source: 0 mA	60 V
Maximum sink current		<= 4 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

Alarm type	None
------------	------

### 3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	None	
Max. residual current at $U_n$		
Locked rotor protection	Auto restart	
Locked rotor current at $U_n$	approx. 3.500 mA	
Clock signal $t_3/t_4$ at locked rotor	Typical: 0,3 s / 10,0 s	

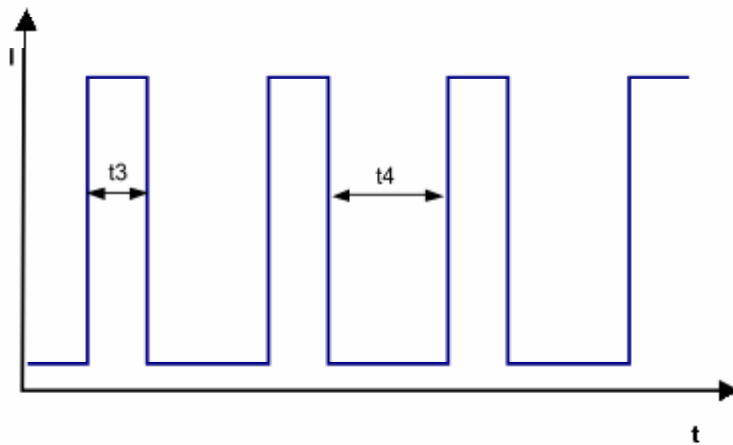


### 3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

10.500 1/min at free air flow	Frequency: 350Hz		
-------------------------------	------------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )	230,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )	615 Pa	

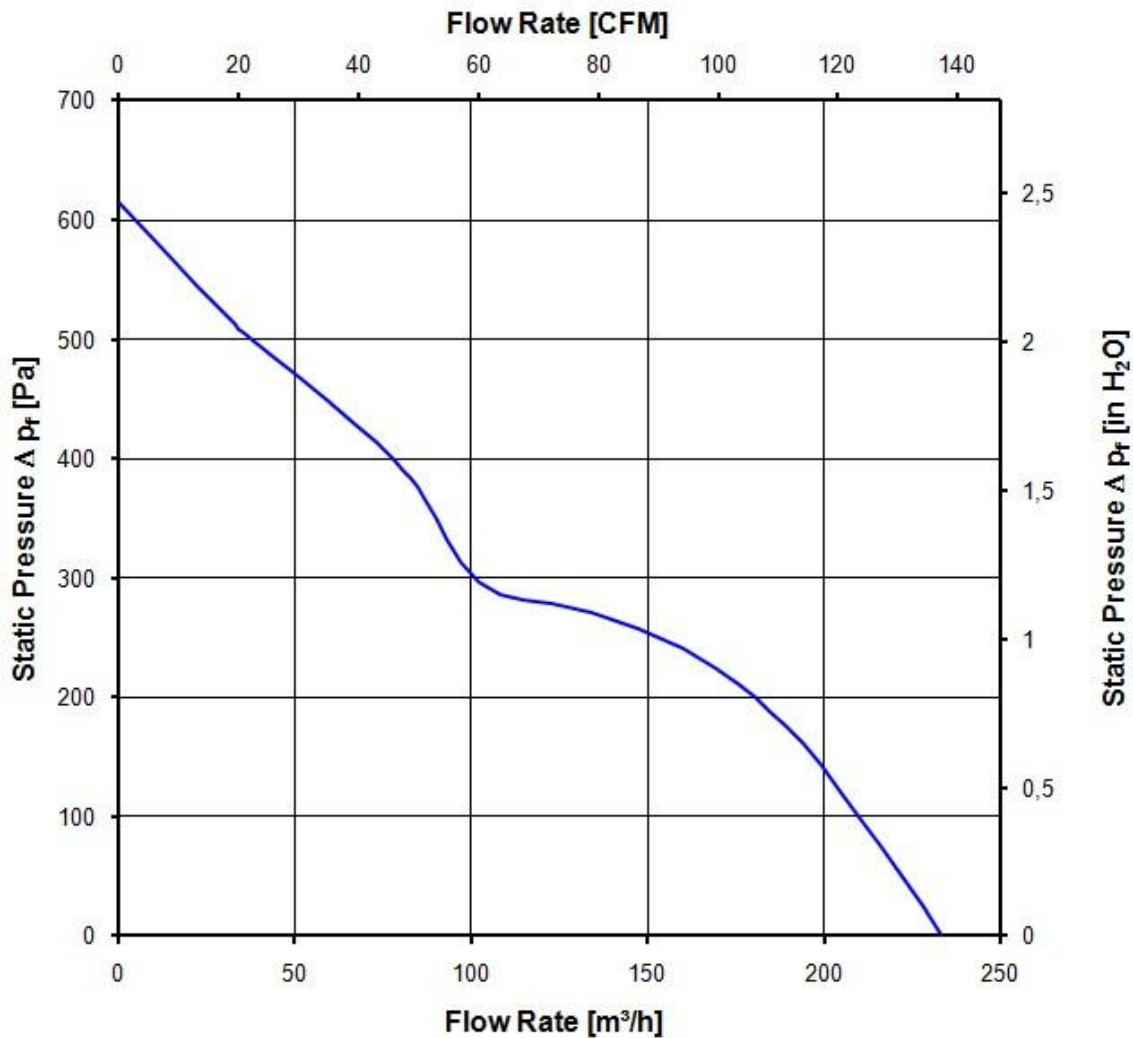



### 3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.  
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
 Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
 For further measurement conditions see section 3.5

a.) Operation condition:

10.500 1/min at free air flow	Frequency: 350Hz		
Optimal operating point	150,0 m3/h @ 224 Pa		
Sound power level at the optimal operating point	7,5 bel(A)		
Sound pressure level at free air flow, measured in rubber bands	66,0 dB(A)		

## 4 Environment

### 4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	55 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

### 4.2 Climatic requirements \*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

\*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

## 5 Safety

### 5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Air and leakage distances	1,0 mm / 1,2 mm	
Protection class	III	

### 5.2 Approval Tests

CE	Yes
UL	Yes / UL507, Electric Fans
VDE	No
CSA	Yes / CSA audited by UL according to C22.2 No. 113 Fans and Ventilators
CCC	No

The approval tests are observed to:

Maximal permitted operating voltage (see section 3.1) and max. permitted ambient temperature TU max.


## 6 Reliability

### 6.1 General

Life expectancy L10 at TU = 40 °C	45.000 h	
Life expectancy L10 at TU max.	30.000 h	

Copying of this drawing and giving it to others and allowing its reproduction of the whole, in part, and  
 in any form, is prohibited. The copyright holder is PAPST-MOTOREN GmbH & Co. KG. All rights are reserved.  
 Bitte nicht weitergeben und Kopieren ist untersagt.


Spindelvermerk nach DIN ISO 1000 beachten

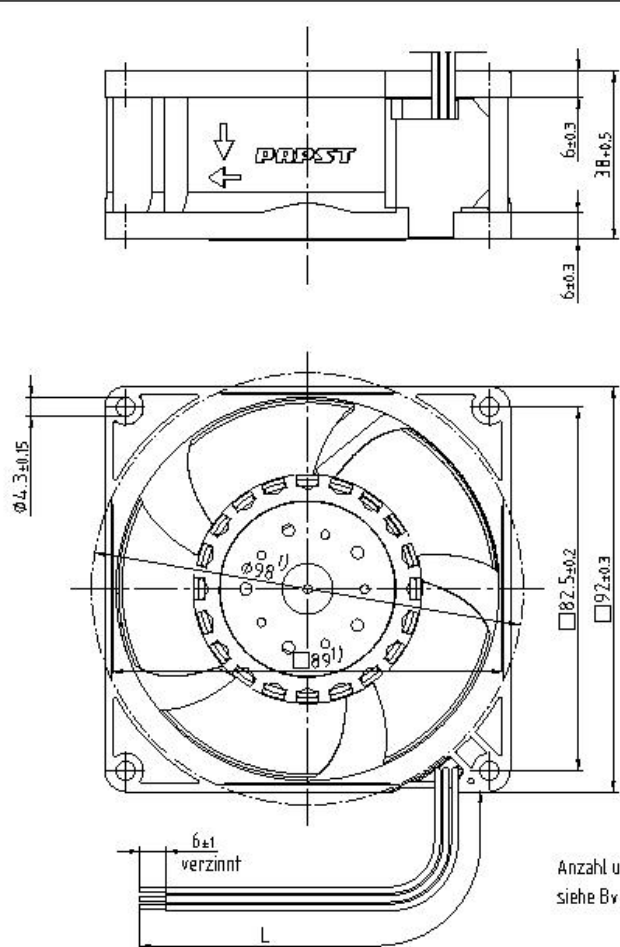

Anzahl und Länge der Litzen  
siehe Bv - Bl.1

Axialspiel bei  
 - Kugellagerung (K): 0 (mit Federausgleich)  
 - Gleitlagerung (G): 0.1 - 1.6

1) Maße für Montagewand

Tolerierung: DIN 7167		Artikel		Maßstab
Allgemeintoleranzen: DIN ISO 2768-mK-E				
	Datum	Name		Zchg.-Nr.
Bearbeitet				
	Index	Änd.-Nr.	<b>PAPST</b> PAPST-MOTOREN GmbH & Co KG D-78112 St. Georgen Germany	Blatt
Gepuffert u. zur Verwendung freigegeben von	an			
			Ersf.Zchg:	A4