

Product Data Sheet

9694300356

VUC0119YUJBS

4114N/2H6AU

ebmpapst

The engineer's choice

4114N/2H6AU (9694300356) ebmpapst Datasheet FansCo
sales@fansco.com
www.fansco.com



4114N/2H6AU

INDEX

1 General 3

2 Mechanics 3

2.1 General..... 3

2.2 Connections..... 3

3 Operating Data 5

3.1 Electrical Interface - Input..... 5

3.2 Electrical Operating Data 6

3.3 Electrical Interface - Output..... 7

3.4 Electrical Features 8

3.5 Aerodynamics 10

3.6 Sound Data..... 11

4 Environment..... 11

4.1 General..... 11

4.2 Climatic Requirements 11

5 Safety..... 12

5.1 Electrical Safety 12

5.2 Approval Tests 12

6 Reliability..... 12

6.1 General..... 12

1 General


| | | |
|-------------------------------------|-------------------------|--|
| Fan type | Fan | |
| Rotating direction looking at rotor | Clockwise | |
| Airflow direction | Air intake over struts | |
| Bearing system | Stainless steel bearing | |
| Mounting position - shaft | Any | |

2 Mechanics**2.1 General**

| | | |
|---|--|--|
| Width | 119,0 mm | |
| Height | 119,0 mm | |
| Depth | 38,0 mm | |
| Mass | 0,390 kg | |
| Housing material | Metal | |
| Impeller material | Plastic | |
| Max. torque when mounted across both mounting flanges Screw size | Wire outlet corner: 420 Ncm Remaining corners: 600 Ncm ISO 4762 - M4 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Wires | |
| Lead wire length | L = 310 mm | |
| Tolerance | + - 10,0 mm | |

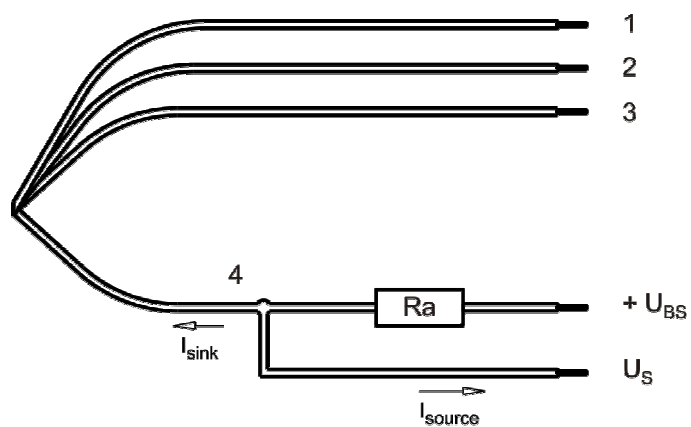

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|--------|-----------|-----------|---------------------|
| 1 | red | + UB | AWG 22 | 1,7 mm |
| 2 | blue | - GND | AWG 22 | 1,7 mm |
| 3 | violet | CONTR | AWG 22 | 1,7 mm |
| 4 | white | Tacho | AWG 22 | 1,7 mm |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



3 Operating Data

3.1 Electrical Interface - Input

| | |
|---------------|--------|
| Control input | Analog |
|---------------|--------|

Features

| | |
|---------------------|------------|
| Input voltage range | 0 V - 10 V |
|---------------------|------------|

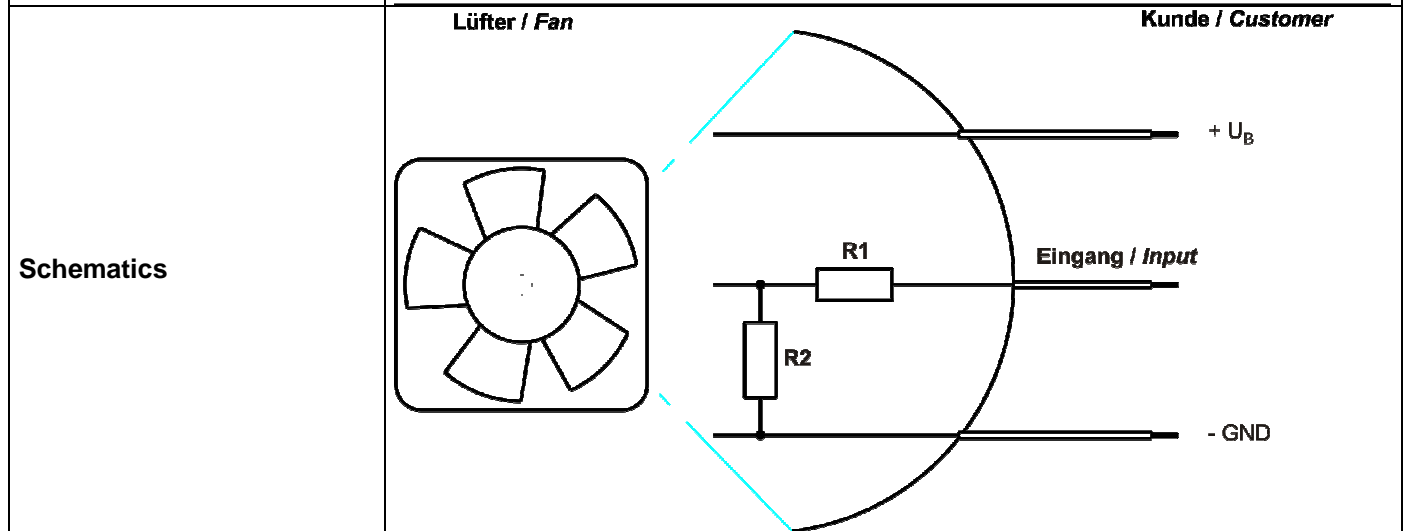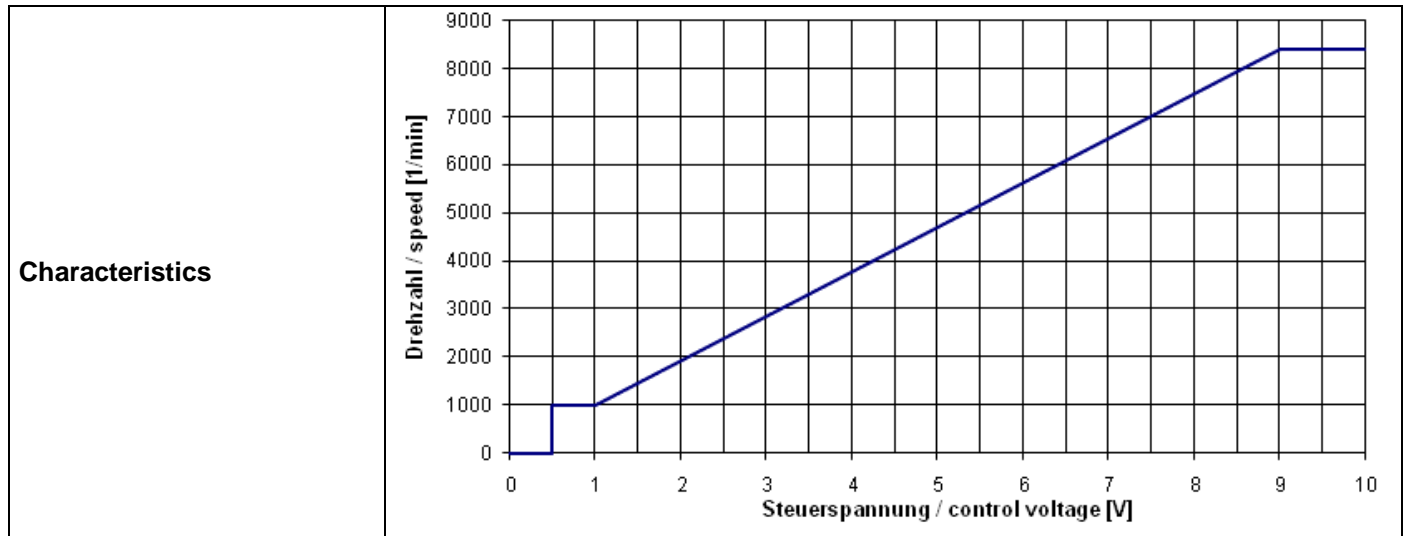

Both input resistors: 100 kOhm

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
I: corresp. to arithm. mean current value

| Name | Condition |
|---------------|-----------------|
| U Contr. 0001 | U Contr.: 9,5 V |


Note to inrush current @ U nom:

The internal electrolytic capacitor 390uF / 35V has no resistor or inrush current limitation, essentially the type and length of the connecting cable is limiting the Inrush current.

| Features | Condition | Symbol | Values | | |
|---------------------|----------------|----------------|-------------|-------------|-------------|
| Voltage range | | U | 16 V | | 30 V |
| Nominal voltage | | U _N | | 24 V | |
| Power consumption | $\Delta p = 0$ | P | 48 W | 65 W | 67 W |
| Tolerance | U Contr. 0010 | | +/- 15 % | +/- 10 % | +/- 10 % |
| Current consumption | $\Delta p = 0$ | I | 3.070 mA | 2.700 mA | 2.250 mA |
| Tolerance | U Contr. 0010 | | +/- 15 % | +/- 10 % | +/- 10 % |
| Speed | $\Delta p = 0$ | n | 7.600 1/min | 8.400 1/min | 8.400 1/min |
| Tolerance | U Contr. 0010 | | +/- 10 % | +/- 5 % | +/- 5 % |


3.3 Electrical Interface - Output

| | |
|------------|---------------------|
| Tacho type | /2 (open collector) |
|------------|---------------------|

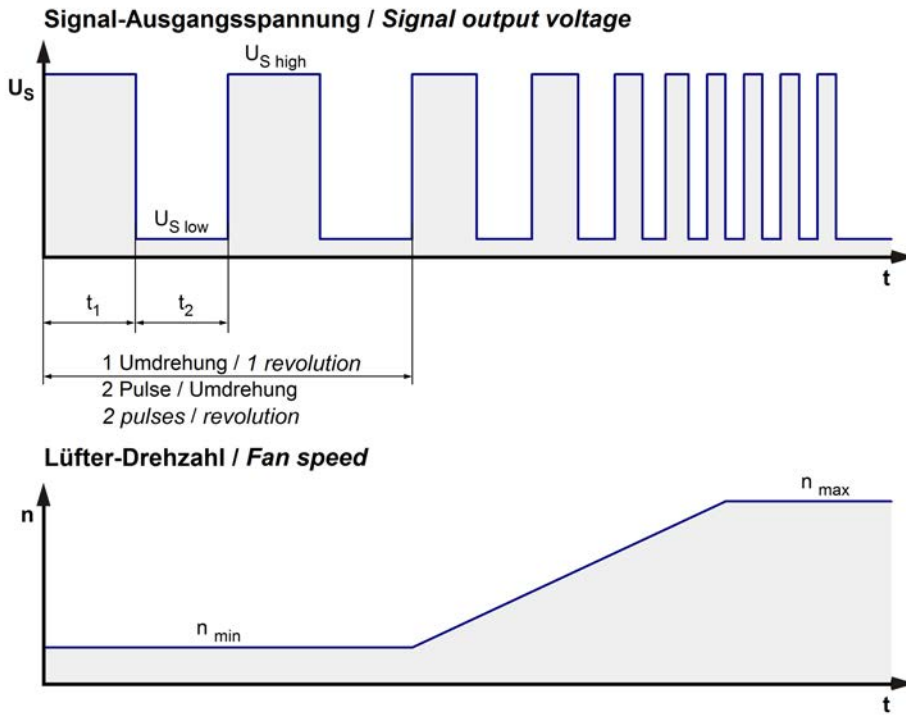

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan Kunde / Customer

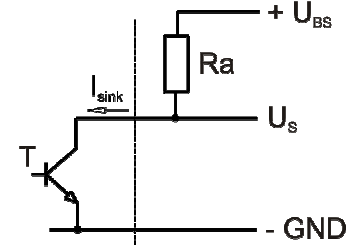


| Features | Note | Values |
|---------------------------|--|----------------------------|
| Tacho operating voltage | U_{BS} | $\leq 30\ V$ |
| Tacho signal Low | $U_{S\ low}$ | $\leq 0,4\ V$ |
| Tacho signal High | $U_{S\ high}$ | $\leq 30\ V$ |
| Maximum sink current | I_{sink} | $\leq 10\ mA$ |
| External resistor | External resistor R_a from U_{BS} to U_s required. All voltages measured to GND. | |
| Tacho frequency | $(2 \times n) / 60$ | |
| Tacho isolated from motor | No | |
| Slew rate | | $\Rightarrow 0,5\ V/\mu s$ |


n = revolutions per minute (1/min)

3.4 Electrical Features


| | | |
|--------------------------------|-------------------------------------|--|
| Electronic function | Speed-Controlled | |
| Reversed polarity protection | P-CH FET | |
| Max. residual current at U_N | $I_F \leq 10 \text{ mA}$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_N | I_{block} approx. 2.400 mA | |
| Clock signal at locked rotor | t_3 / t_4 typical: 0,5 s / 5,0 s | |

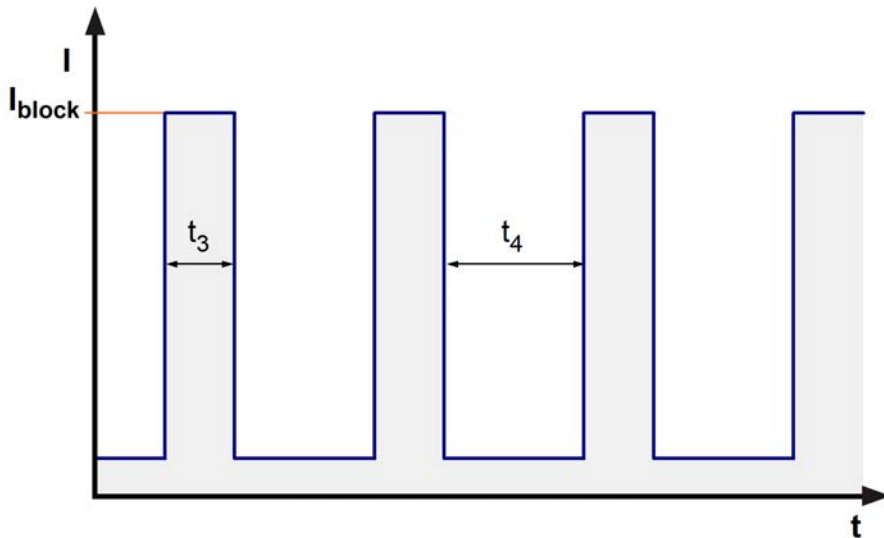


The locked rotor current is denoted as peak-current at nominal voltage.

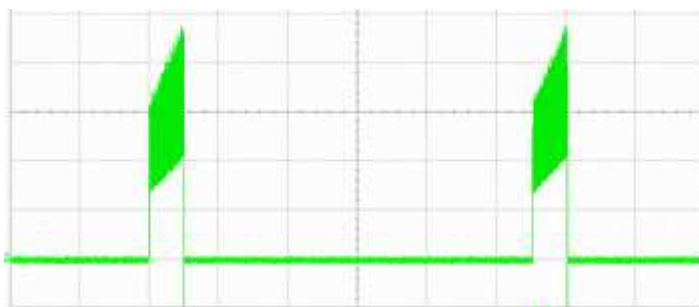

Locked rotor current @ 24 V ($I = 500\text{mA/div}$; $t = 1\text{s/div}$)

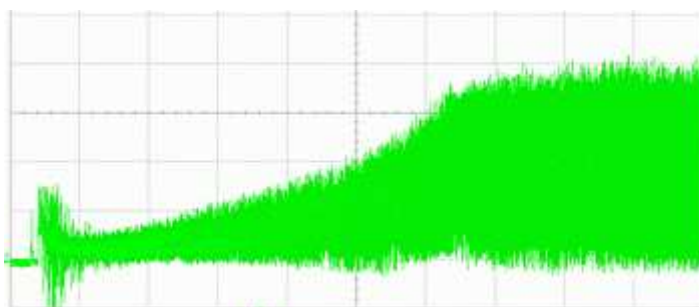

Start-up current @ 24 V ($I = 1\text{A/div}$; $t = 1\text{s/div}$)

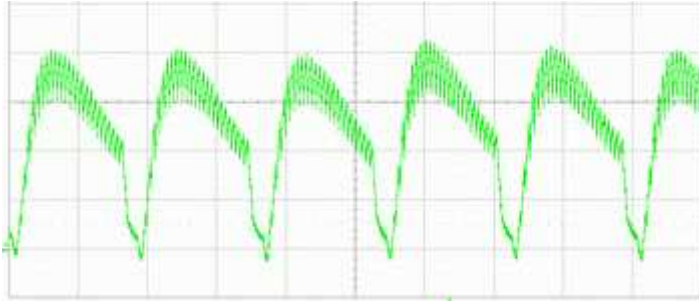

Running current @ 24 V (I = 1A/div ; t = 1ms/div)

Internal Fuse:


Littelfuse NANO2(R) FUSE; Very fast acting 451 Series; 7 A (Art.-Nr.: 0451007.MRL)

3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

| | | | |
|---|----------------|-----------------------|--|
| 8.400 1/min at free air flow | U Contr. 9,5 V | | |
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | | 425 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | | 860 Pa | |

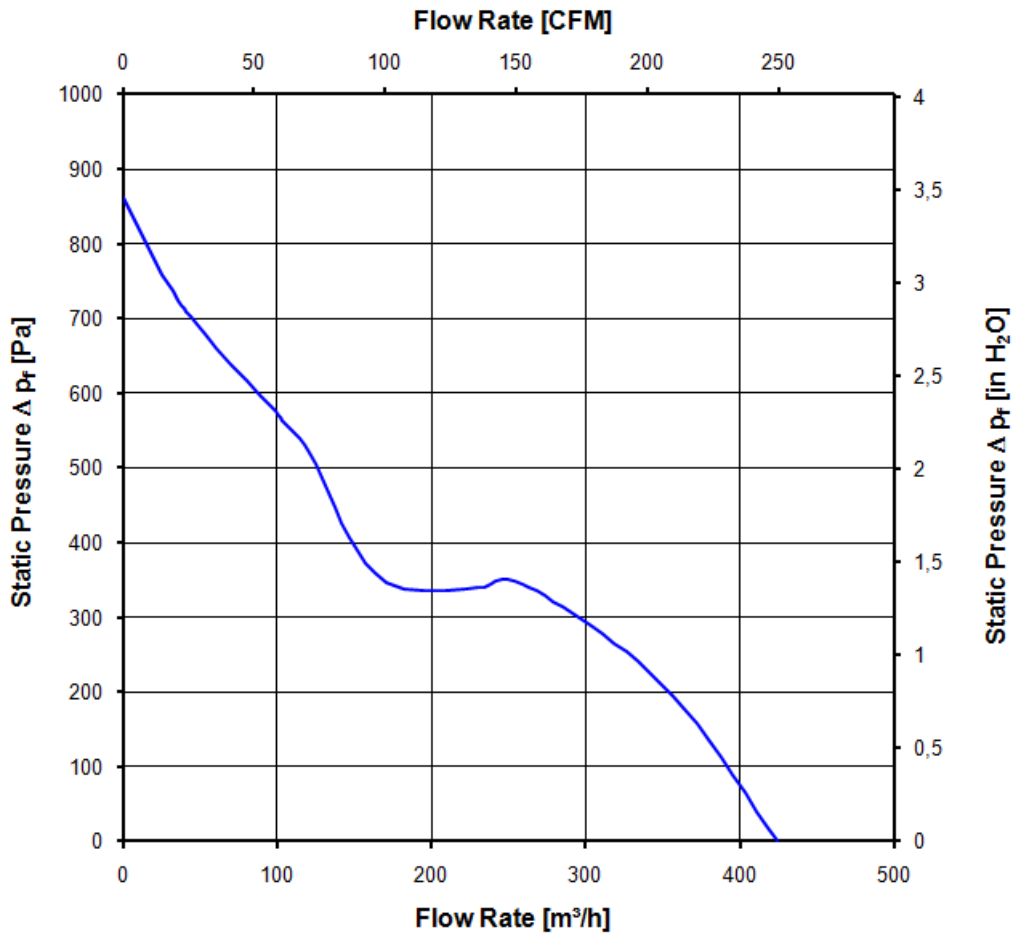

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

| | | | |
|------------------------------|----------------|--|--|
| 8.400 1/min at free air flow | U Contr. 9,5 V | | |
|------------------------------|----------------|--|--|

4 Environment

4.1 General

| | | |
|--|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C | |
| Max. permitted ambient temperature TU max. | 65 °C | |
| Min. permitted storage temperature TL min. | -40 °C | |
| Max. permitted storage temperature TL max. | 80 °C | |

4.2 Climatic Requirements

| | | |
|--------------------------------|---|--|
| IP-protection type (certified) | IP 68 (for fan only, not for connector if applicable) **) | |
| Humidity requirements | humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days | |
| Salt fog requirements | salt fog, cyclic, in operation; according to DIN EN 60068-2-52, 3 cycle | |

Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

**) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

Short description of the IP-protection type:

Solid particle Protection: Dust tight.

Protection against deliberate contact: Protected against contact to hazardous parts with a wire.

Protection against water: The fan test according to IP68 (Based on IEC 60529), is conducted in non-operating mode. The fan is tested by a complete immersion in water for a period of 2h at a water-level of 1,2m. Electrical connections are not immersed since they are customer specific.

Please require severity levels and specification parameters from the responsible development departments.

5 Safety**5.1 Electrical Safety**

| | | |
|--|------------------|--|
| Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. | 500 VAC / 1 Min. | |
| B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 850 VDC / 1 Sec. | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 10 MOhm | |
| Clearance / creepage distance | 1,0 mm / 1,2 mm | |
| Protection class | III | |

5.2 Approval Tests


| | | |
|-----|---|---|
| CE | EC Declaration of Conformity | Yes |
| EAC | Eurasian Conformity | Yes |
| UL | Underwriters Laboratories | Yes / UL507, Electric Fans E38324 |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association | Yes / C22.2 No. 113 Fans and Ventilators |
| CCC | China Compulsory Certification | Not applicable |

The approval tests are observed to:

U approval max.:30,0 V @ TU approval max.: 65,0 °C

6 Reliability**6.1 General**

| | | |
|--|------------|--|
| Life expectancy L10 at TU = 40 °C | 60.000 h | |
| Life expectancy L10 at TU max. | 32.500 h | |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 102. 500 h | |

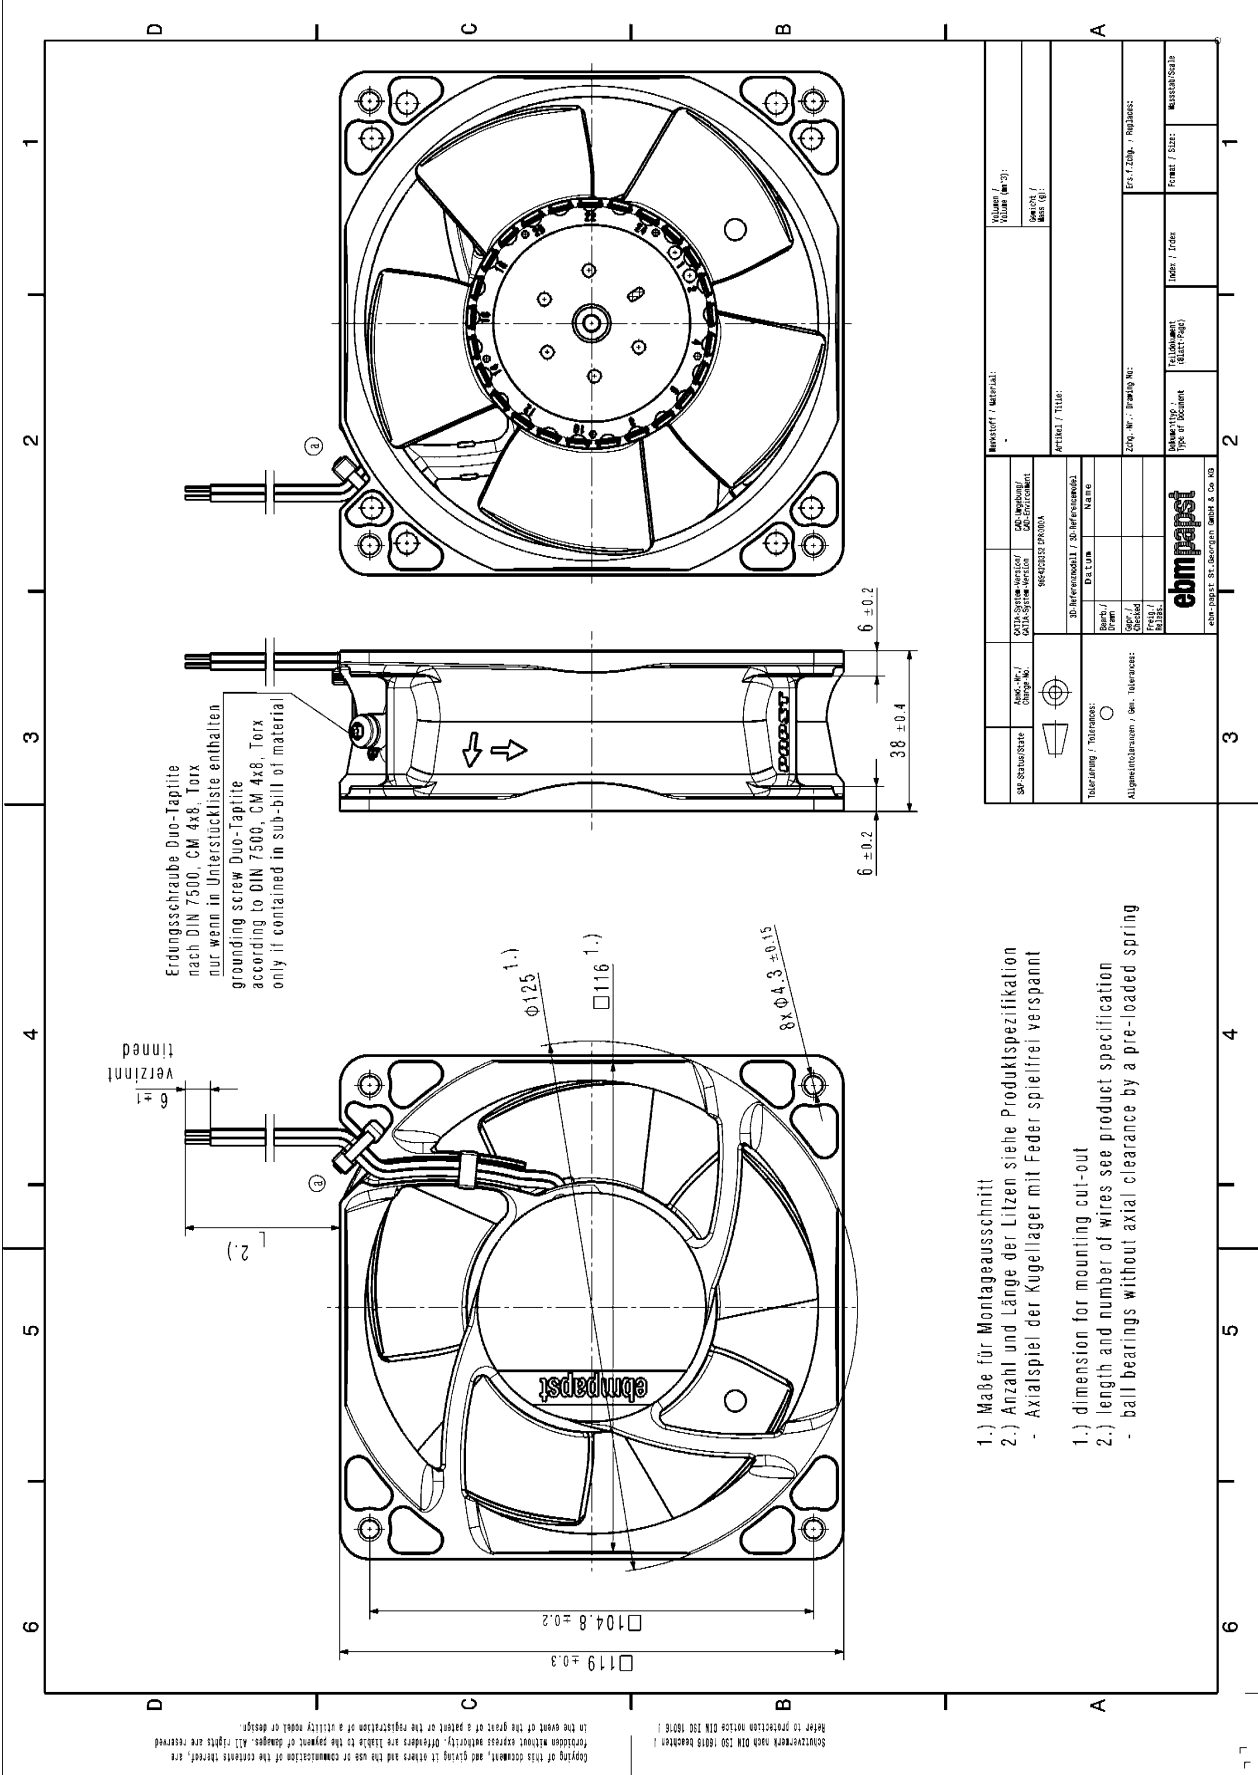

| | | | |
|--|---|---|---|
| SAP Stammsatz Assoc. No. / Change No. | CAD System Version DATA System Version | CAD Model / CAD-Description Da. EUM | Hersteller / Material: Volume / Anzahl (Menge) Gewicht / Mass (G) |
| ID: Referenzmodell / So. Referenzmodell Name | Artikel / Title: | 2Dy. Nr. / Drawing No. | Ers. / Zsh. / Replace: |
| Tolerierung / Tolerances: Allgemeineinheiten / Gen. Tolerances: | ID: Referenzmodell / So. Referenzmodell Name | Datum | Formel / Size: Massstab/Scale |
| ebmpapst ebm-papst GmbH & Co. KG | Datum / Date: Zeichner / Designer: Prüfer / Inspector: | Folio / Sheet: von / of: | Zeichnung / Drawing Page: Blatt / Sheet |