

Product Data Sheet 4412 F/2GMLP

ebm**papst**

The engineer's choice



4412 F/2GMLP**INDEX**

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	3
3	Operating Data.....	4
3.1	Operating Data - Electrical Interface - Input	4
3.2	Electrical Operating Data	5
3.3	Operating Data - Electrical Interface - Output	6
3.4	Electrical Features	7
3.5	Aerodynamics	8
3.6	Sound Data	9
4	Environment.....	9
4.1	General	9
4.2	Climatic Requirements*)	9
5	Safety.....	10
5.1	Electrical Safety	10
5.2	Approval Tests	10

1 General

Fan type	Fan	
Rotating direction looking at rotor	Counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Sleeve bearing	
Mounting position	Any	


2 Mechanics

2.1 General

Width	119,0 mm	
Height	119,0 mm	
Depth	25,4 mm	
Mass	0,175 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 40 Ncm remaining corners: 10 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+/- 10,0 mm	
Wire size (AWG)	24	
Insulation diameter	1,55 mm	
Contact	See drawing	

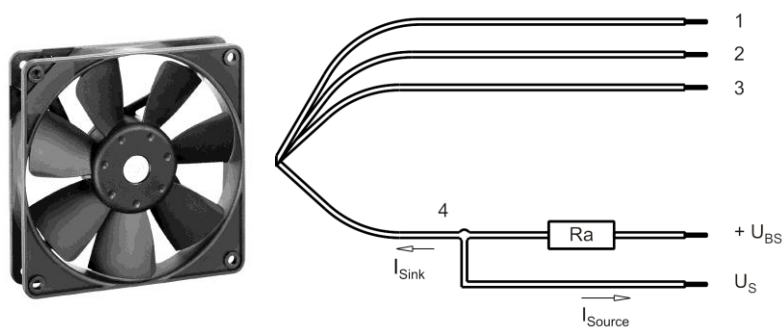

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM
Wire 4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

Features

Input type	Open collector / TTL	
PWM - Frequency		21 kHz - 28 kHz Typical: 25 kHz
Max. voltage for logic "Low"		0,8 V
Max. voltage for logic "High"	Open circuit voltage	5,25 V
Maximum source current	short circuit current	≤ 5 mA
4 wire startup condition	PWM duty cycle	> 20 %
4 wire operation condition after startup	PWM duty cycle	15 % - 100 %
Shutdown condition	PWM duty cycle	$= 0$ %
Typical time until warm restart	After shutdown by PWM	8,2 s

Characteristics	
Schematics	Lüfter / Fan Kunde / Customer

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
 I: corresp. to arithm. mean current value


Name	Condition		
PWM 0001	PWM: 100 %; f: 25 kHz	f: 21 kHz	f: 28 kHz

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	10,8 V		12,6 V
Nominal voltage	$\Delta p = 0$	U_N		12 V	
Power consumption	$\Delta p = 0$	P	1,6 W	2 W	2,2 W
Tolerance	PWM 0010		+/- 17,5 %	+/- 12,5 %	+/- 15 %
Current consumption	$\Delta p = 0$	I	150 mA	160 mA	175 mA
Tolerance	PWM 0010		+/- 17,5 %	+/- 12,5 %	+/- 15 %
Speed	$\Delta p = 0$	n	1.850 1/min	1.950 1/min	2.100 1/min
Tolerance	PWM 0010		+/- 12,5 %	+/- 7,5 %	+/- 10 %

3.3 Operating Data - Electrical Interface - Output


Tacho type	/2 (open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

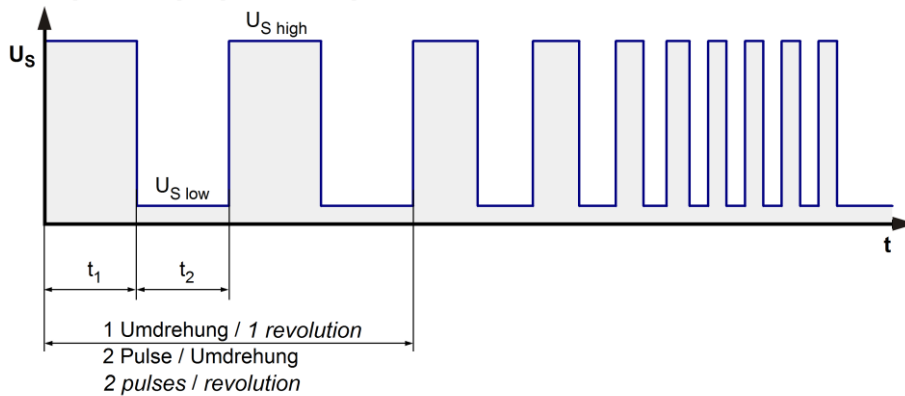


$$R_a = \frac{U_{BS} - U_{S \text{ low}}}{I_{\text{sink}}}$$

Lüfter / Fan Kunde / Customer

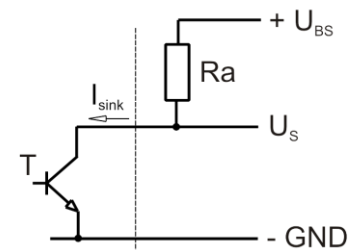

Lüfter-Drehzahl / Fan speed

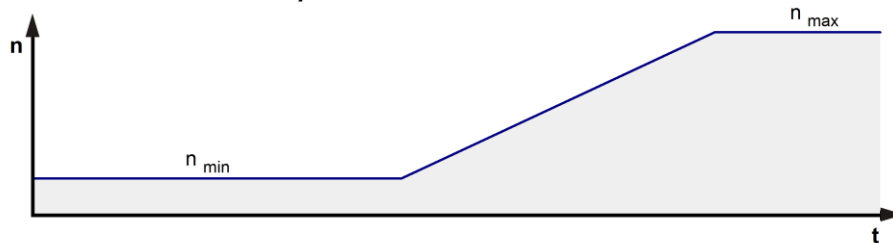


Features	Note	Values
Tacho operating voltage (UBS)		$\leq 30,0 \text{ V}$
Tacho signal Low	$I_{\text{sink}}: 2 \text{ mA}$	$\leq 0,4 \text{ V}$
Tacho signal High	$I_{\text{source}}: 0 \text{ mA}$	$\leq 30,0 \text{ V}$
Maximum sink current		4 mA
External resistor	External resistor R_a from UBS to U_S required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5 \text{ V/us}$

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	None	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_n	$I_F \leq 100 \mu A$	
Locked rotor protection	Auto restart	
Locked rotor current at U_n	approx. 500 mA	
Clock signal t_3/t_4 at locked rotor	Typical: 0,24 s / 8,2 s t_3 : 0,14 s... 0,36 s t_4 : 2,8 s... 27,0 s	

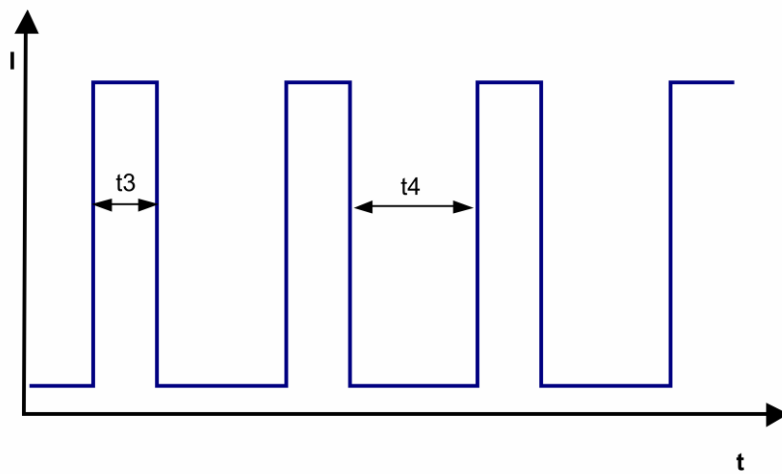

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;


In the intake and outlet area should not be any solid obstruction within 0,5 m.

The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

1.950 1/min at free air flow	PWM 100 %; f: 25 kHz	f: 21 kHz	f: 28 kHz
------------------------------	----------------------	-----------	-----------

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \text{max.}$)	114,0 m ³ /h	
Max. static pressure ($\Delta p = \text{max.}$ / $\dot{V} = 0$)	32 Pa	

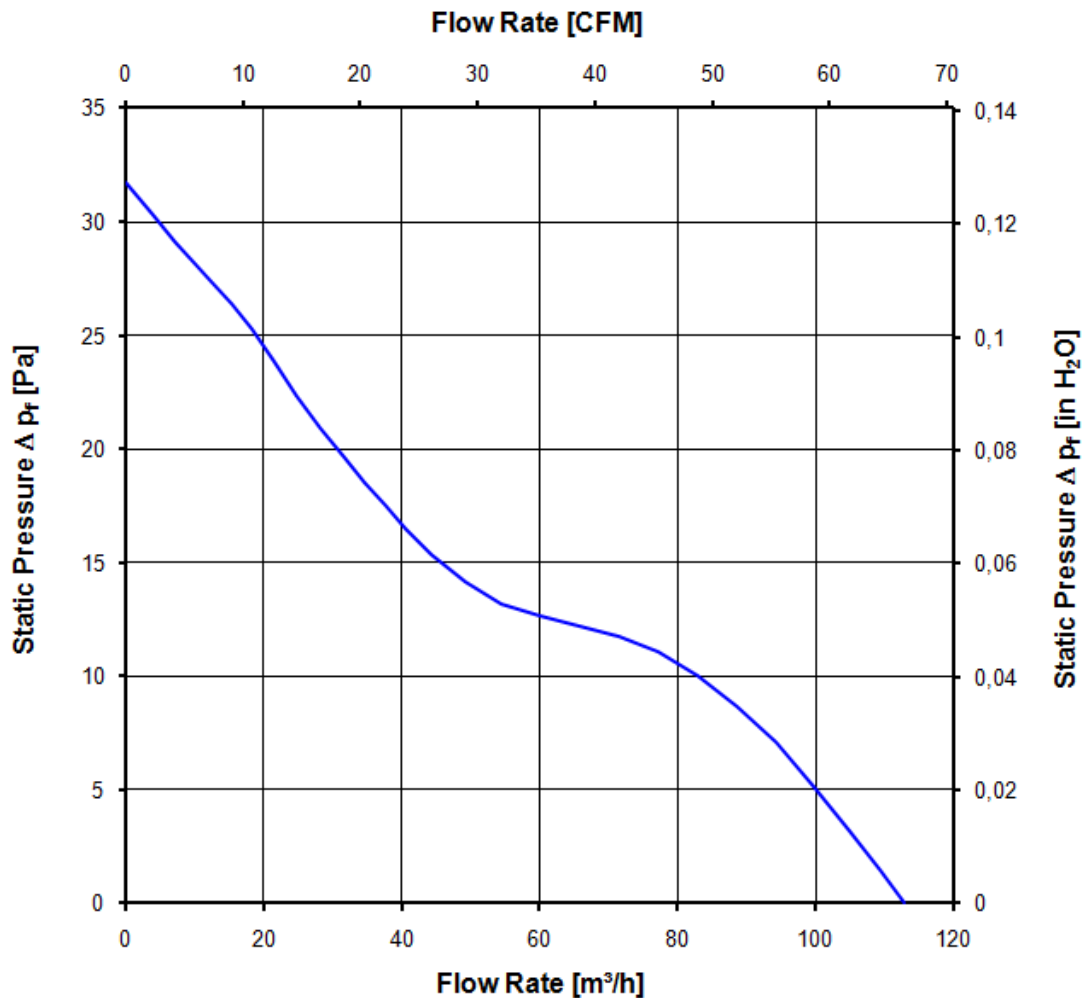

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see section 3.5

a.) Operation condition:

1.950 1/min at free air flow	PWM 100 %; f: 25 kHz	PWM min.: ; f: 21 kHz	PWM max.:; f: 28 kHz
------------------------------	----------------------	-----------------------	----------------------

Optimal operating point	82,0 m ³ /h @ 9 Pa	
Sound power level at the optimal operating point	4,3 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	30,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	60 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety


Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests

CE	EC Declaration of Conformity	No
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	No

Copying of this document, and giving it to others and the use or communication of the contents thereof, are prohibited without the written consent of ebm-papst. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Schutzzeichn. nach DIN ISO 4016 beachten/
Refer to protection notice DIN ISO 4016

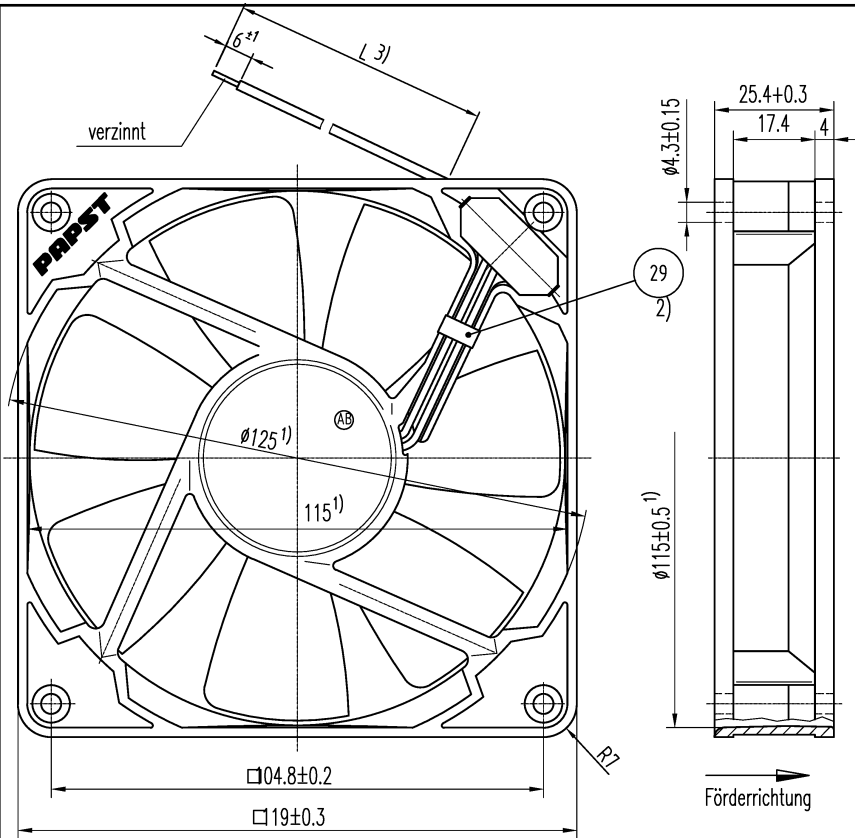

Axialspiel bei Kugellagerung (K) : 0 (mit Federausgleich)
Axialspiel bei Gleitlagerung (G) : 0.1 - 0.6
1) Maße für Montagewand
2) Pos. 29 nur wenn in Stückliste vorhanden
3) Anzahl und Länge der Litzen siehe Produktspezifikation

		ebmpapst		Werkstoff/Material:			Volumen/Volume (mm³):		
SAP-Status/State	Änd.-Nr./Change-No.	AutoCAD-System-Version					CAD-Umgebung/ CAD-Environment		Gewicht/Mass (g):
		Datum/Date		Name/Name		Artikel/Title			
		Bearb./ Drawn							
		Gepr./ Checked							
Tolerierung/Tolerances:		Freig./ Released							
Allgemeintoleranzen/Gen. tolerances:		ebmpapst			Zchg.-Nr. / Drawing.-No.:			Ers.f.Zchg./Replaces:	
		ebm-papst St. Georgen GmbH & Co. KG			Dokumenttyp/Type of Document	Teildokument (Blatt/Page)	Index/Index	Format/Size	Massstab/scale