

Product Data Sheet

9245012001
VWC0135AQKCS
5656 S

ebmpapst

The engineer's choice

5656S (9245012001) ebmpapst Datasheet
sales@fansco.com
www.fansco.com



5656 S

INDEX

1 General 3

2 Mechanics 3

2.1 General..... 3

2.2 Connections..... 4

3 Operating Data 5

3.1 Electrical Operating Data 5

3.2 Electrical Features 6

3.3 Aerodynamics 6

3.4 Sound Data..... 7

4 Environment..... 7

4.1 General..... 7

4.2 Climatic Requirements 8

5 Safety..... 8

5.1 Electrical Safety 8

5.2 Approval Tests..... 8

6 Reliability..... 8

6.1 General..... 9

1 General


| | |
|-------------------------------------|------------------------|
| Fan type | Fan |
| Rotating direction looking at rotor | Counterclockwise |
| Airflow direction | Air outlet over struts |
| Bearing system | Ball bearing |
| Mounting position - shaft | Any |
| Balancing grade | 2,5 |

2 Mechanics**2.1 General**

| | | |
|---|---|--|
| Width | 135,0 mm | |
| Height | 135,0 mm | |
| Depth | 38,0 mm | |
| Diameter | 0,0 mm | |
| Mass | 0,800 kg | |
| Housing material | Metal | |
| Impeller material | Metal | |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 160 Ncm Remaining corners: 190 Ncm | |
| Screw size | ISO 4762 - M4 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|-------------|--|
| Electrical connection | Plug | |
| Lead wire length | See drawing | |
| Tolerance | | |
| Tube length | See drawing | |
| Tolerance | | |
| Wire size (AWG) | | |
| Insulation diameter | | |
| Plug | See drawing | |
| Contact | See drawing | |



3 Operating Data

3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)

I: corresp. to RMS line current

| Features | Condition | Symbol | Values | |
|--------------------------------|----------------|--------|---|---|
| Frequency | $\Delta p = 0$ | f | 50 Hz | 60 Hz |
| Nominal voltage Tolerance | $\Delta p = 0$ | U_N | 230 V +/- 10 % | 230 V +/- 10 % |
| Power consumption Tolerance | $\Delta p = 0$ | P | 30 W + 5 % - 10 % | 28 W + 5 % - 10 % |
| Speed Tolerance | $\Delta p = 0$ | n | 2.700 1/min +/- 3 % | 3.100 1/min +/- 3 % |

3.4 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302) Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see chapter aerodynamics.

a.) Operation condition:
 2.700 1/min at free air flow Frequency: 50 Hz

| | | |
|---|---------------------------------|--|
| Optimal operating point | 185,0 m ³ /h @ 29 Pa | |
| Sound power level at the optimal operating point | 6,0 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 47,0 dB(A) | |

b.) Operation condition:
 3.100 1/min at free air flow Frequency: 60 Hz

| | | |
|---|---------------------------------|--|
| Optimal operating point | 210,0 m ³ /h @ 36 Pa | |
| Sound power level at the optimal operating point | 6,3 bel(A) | |
| Sound pressure level at free air flow, measured in rubber bands | 51,0 dB(A) | |

4 Environment

4.1 General

| | | |
|--|----------------------------------|--|
| Min. permitted ambient temperature TU min. | -35 °C / 50 Hz -35 °C / 60 Hz | |
| Max. permitted ambient temperature TU max. | 70 °C / 50 Hz 80 °C / 60 Hz | |
| Min. permitted storage temperature TL min. | -40 °C | |
| Max. permitted storage temperature TL max. | 80 °C | |

4.2 Climatic Requirements

| | | |
|-----------------------|---|--|
| Humidity requirements | humid heat, constant; according to DIN EN 60068-2-78, 14 days | |
| Water exposure | None | |
| Dust requirements | None | |
| Salt fog requirements | None | |

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

| | |
|---|--|
| Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | 1500 VAC / 1 Min. 1500 VAC / 1 Sec. |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | RI > 50 MOhm |
| Clearance / creepage distance | 2,0 mm / 1,8 mm |
| Protection class | I |

5.2 Approval Tests

| | | |
|-----|---|---|
| CE | EC Declaration of Conformity | Yes |
| EAC | Eurasian Conformity | Yes |
| UL | Underwriters Laboratories | Yes / UL507, Electric Fans E38324 |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association | Yes / C22.2 No. 113 Fans and Ventilators |
| CCC | China Compulsory Certification | Yes / GB 12350 Safety Requirements for small Power Motors |

The approval tests are observed to:

U approval max.: 230 V / f: 50 and 60 Hz @ TU approval max.: 70 °C

6 Reliability



6.1 General

| | | |
|-----------------------------------|------------------|--|
| Life expectancy L10 at TU = 40 °C | 45.000 h / 50 Hz | |
| | 47.500 h / 60 Hz | |
| Life expectancy L10 at TU max. | 20.000 h / 50 Hz | |
| | 20.000 h / 60 Hz | |

516
3...
045
243
240
235
232
231
210

Copyright of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.


Schutzmerk nach DIN 34 beachten

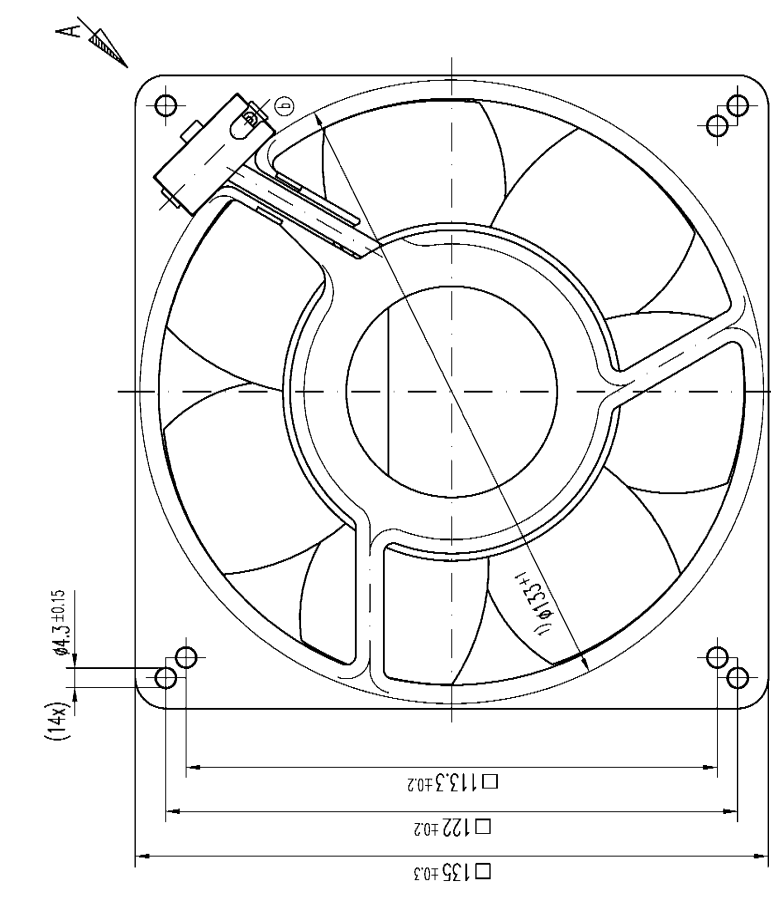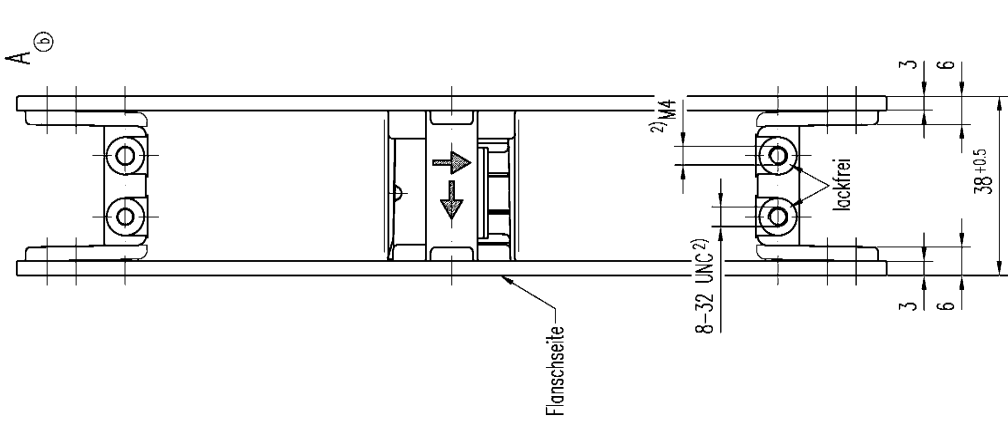

- 1) = Maß für Montagewand
- 2) = Einschraubtiefe max. 5mm

- Axialspiel bei
- Kugellagerung (K): 0 (mit Federausgleich)
 - Gleitlagerung (G): 0.1 - 0.6
 - Gleitlagerung (GF): 0 (mit Federausgleich)

Maße für Steckeranschluß

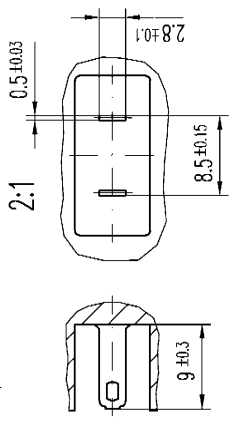

| | | | |
|---------|----------------|--------|----------------|
| 5656 SR | K 924 5012 004 | 5656 S | K 924 5012 002 |
| 5656 S | K 924 5012 001 | 5656 S | K 924 5012 001 |

| | | | |
|--|----------|----------------------------|-------------|
| Allgemeindaten | | DIN ISO 2768-mK | |
| Erstellt | Datum | Name | Artikel |
| Geprüft | | Nuber J. | |
| | | Wrobel G. | |
| b | 17/97 | 16.01.97 | Nuber J. |
| Index | Znd.-Nr. | Datum | Geprüft von |
| | | | PAPST |
| Zur Verwendung im Verteiler freigegeben von Wrobel G. am | | | |
| Papst-Motoren GmbH & Co KG | | Papst-Motoren GmbH & Co KG | |
| D-78112 St. Georgen | | D-78112 St. Georgen | |
| Germany | | Germany | |
| Zeich.-Nr. | | Blatt | |
| | | 1:1 (2:1) | |
| Ers. Zöng. | | : | |