

**Product Data Sheet**

**9692300192**  
VWC0060AUEBS  
638/2HHPU

**ebmpapst**

The engineer's choice



638/2HHPU

INDEX

**1 General ..... 3**

**2 Mechanics ..... 3**

2.1 General..... 3

2.2 Connections..... 3

**3 Operating Data ..... 4**

3.1 Electrical Interface - Input..... 4

3.2 Electrical Operating Data ..... 5

3.3 Electrical Interface - Output..... 6

3.4 Electrical Features ..... 7

3.5 Aerodynamics ..... 15

3.6 Sound Data..... 16

**4 Environment..... 16**

4.1 General..... 16

4.2 Climatic Requirements ..... 16

**5 Safety..... 17**

5.1 Electrical Safety ..... 17

5.2 Approval Tests ..... 17

**6 Reliability..... 17**

6.1 General..... 17

1 General

Fan type	Fan	
Rotating direction looking at rotor	Clockwise	
Airflow direction	Air outlet over struts	
Bearing system	Stainless steel bearing	
Mounting position - shaft	Any	


2 Mechanics

2.1 General

Width	60,0 mm	
Height	60,0 mm	
Depth	25,4 mm	
Mass	0,070 kg	
Housing material	Plastic	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 30 Ncm Remaining corners: 70 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 310 mm	
Tolerance	+/- 10,0 mm	

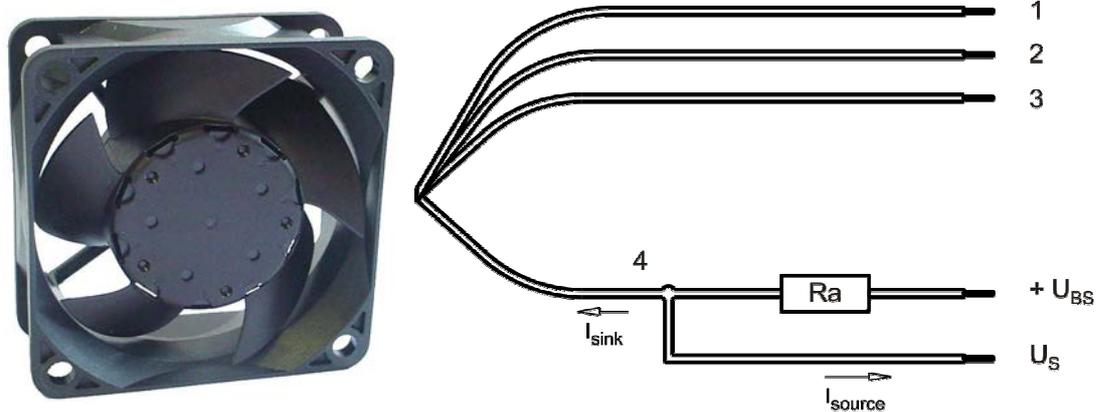

Wire	Color	Operation	Wire size	Insulation diameter
1	red	+ UB	AWG 24	1,10 mm
2	blue	- GND	AWG 24	1,10 mm
3	violet	PWM	AWG 24	1,10 mm
4	white	Tacho	AWG 24	1,1 mm

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

### 3 Operating Data

#### 3.1 Electrical Interface - Input

Control input	PWM
---------------	-----

#### Features

Input type	Open collector	
PWM - Frequency		1 kHz - 30 kHz

<p><b>Characteristics</b></p>	
<p><b>Schematics</b></p>	

### 3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: >= 95 %;


Startup peakpulse current:  $I_{pmax} = 350\text{mA}$

Startup peakpulse duration:  $t_p = 6 \times 1\text{ms}$

Features	Condition	Symbol	Values		
Voltage range		U	40 V		60 V
Nominal voltage		$U_N$		48 V	
Power consumption	$\Delta p = 0$	P	2,5 W	3,2 W	3,5 W
Tolerance	PWM 0010		+/- 17,5 %	+/- 17,5 %	+/- 17,5 %
Current consumption	$\Delta p = 0$	I	62 mA	66 mA	58 mA
Tolerance	PWM 0010		+/- 17,5 %	+/- 17,5 %	+/- 17,5 %
Speed	$\Delta p = 0$	n	7.700 1/min	8.500 1/min	8.500 1/min
Tolerance	PWM 0010		**)	**)	**)
Starting current consumption				<= 315 mA	


3.3 Electrical Interface - Output

Tacho type	/2 (open collector)
------------	---------------------

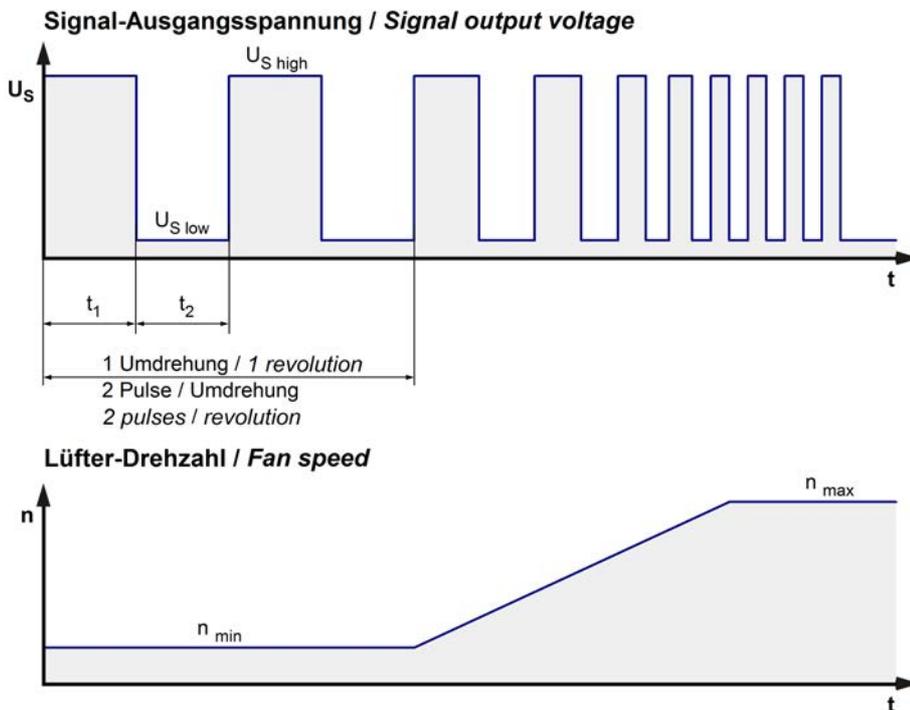

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan      Kunde / Customer

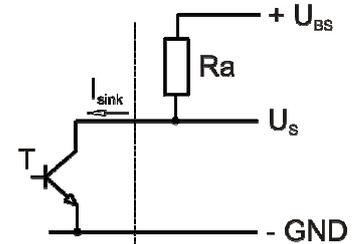


Features	Note	Values
Tacho operating voltage	$U_{BS}$	$\leq 60\ V$
Tacho signal Low	$U_{S\ low}$	$\leq 0,4\ V$
Tacho signal High	$U_{S\ high}$	$\leq 60\ V$
Maximum sink current	$I_{sink}$	4 mA
External resistor	External resistor $R_a$ from $U_{BS}$ to $U_s$ required. All voltages measured to GND.	
Tacho frequency	$(2 \times n) / 60$	
Tacho isolated from motor	No	
Slew rate		$\Rightarrow 0,5\ V/\mu s$

n = revolutions per minute (1/min)

3.4 Electrical Features


Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at $U_N$	$I_F \leq 900 \mu A$	
Locked rotor protection	Auto restart	
Locked rotor current at $U_N$	$I_{block}$ approx. 315 mA	
Clock signal at locked rotor	$t_3 / t_4$ typical: 0,3 s / 10 s	

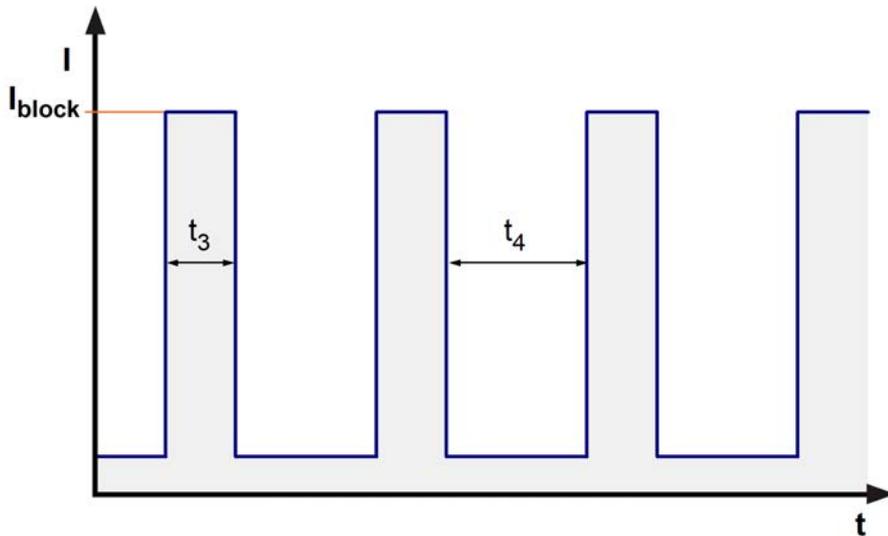

The fan has a special blocking cycle. The behavior of this cycle differs marginally between a blocked rotor when the fan gets started and a blocked rotor during the running operation of the fan. The following figures describe this characteristic.

1. Blocked rotor at the start of the fan

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

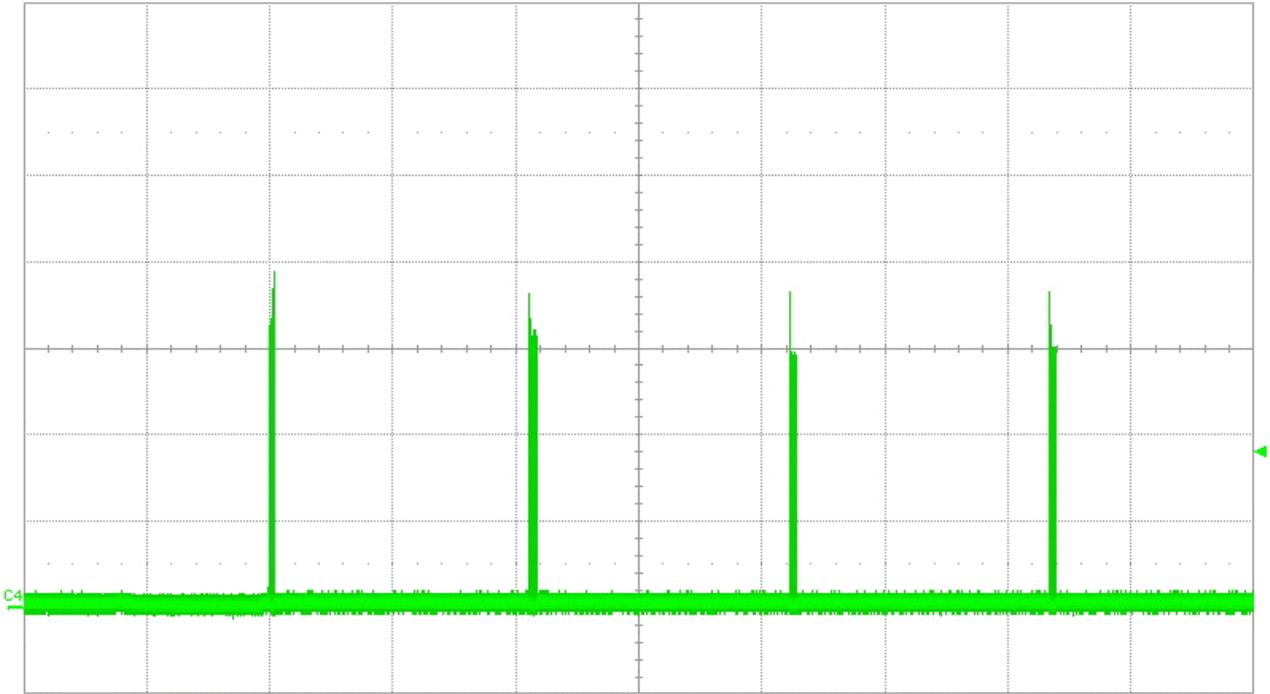


Measure	P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
value	---	19.642 %				
status	---	⚠	⚠			

C4 BwL DC  
100 mA/div  
-301.0 mA  
TELEDYNE LECROY

Zeitbasis	-15.0 s	Trigger	C4 DC
Roll	5.00 s/div	Stopp	180 mA
5.00 MS	100 kS/s	Edge	Negativ

4/11/2017 2:08:29 PM

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

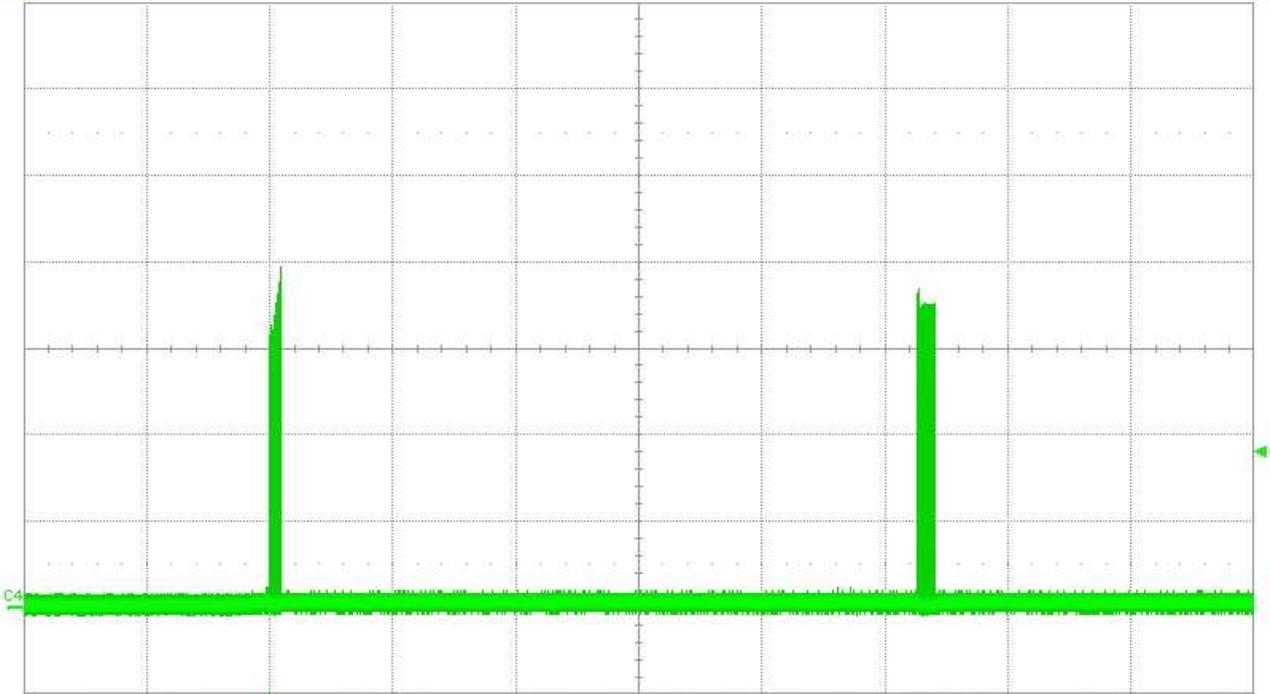

Measure  
value  
status


P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
---	---	---	---	---	---
⚠	⚠	⚠	⚠	⚠	⚠

C4 BwL DC  
100 mA/div  
-301.0 mA  
TELEDYNE LECROY

Zeitbasis	-6.00 s	Trigger	C4 DC
Roll	2.00 s/div	Stopp	180 mA
5.00 MS	250 kS/s	Edge	Negativ

4/11/2017 2:09:01 PM

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

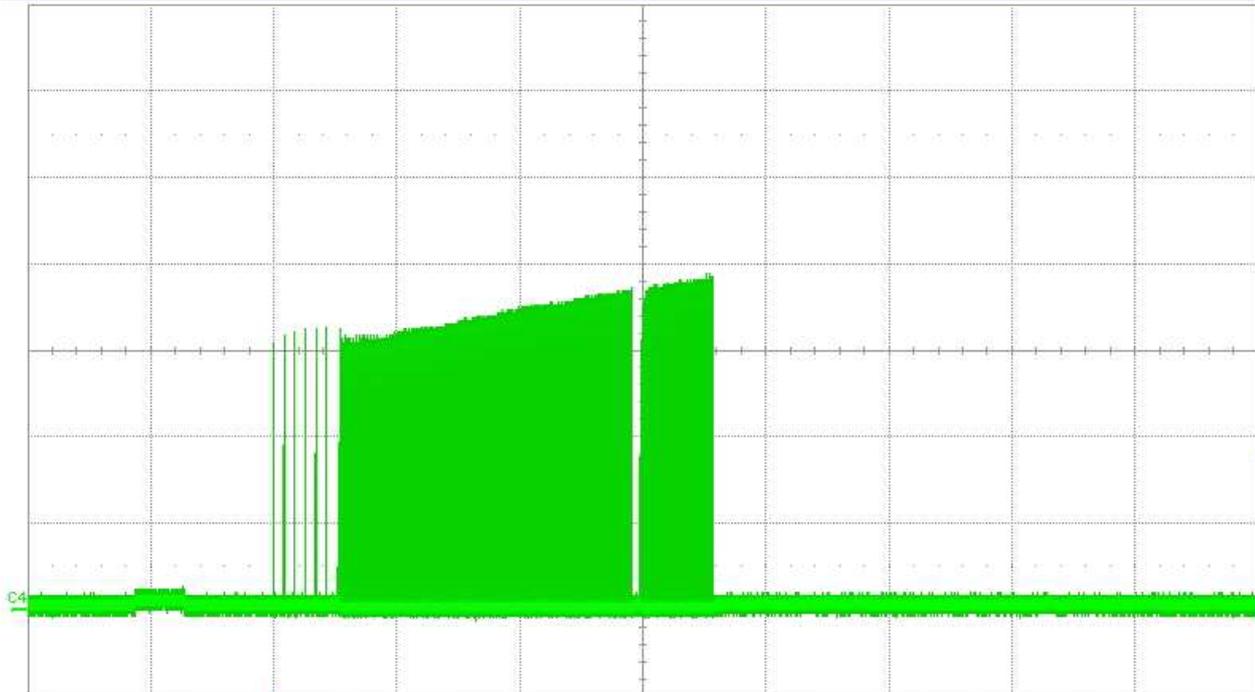

Measure	P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
value	---	2.453 %				
status	---	⚠	⚠			

C4 BwL DC  
100 mA/div  
-301.0 mA


TELEDYNE LECROY

Zeitbasis -150 ms Trigger C4 DC  
50.0 ms/div Stopp 180 mA  
5.00 MS 10 MS/s Edge Negativ

4/11/2017 2:09:49 PM

2. Blocked rotor after the normal operation of the fan

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

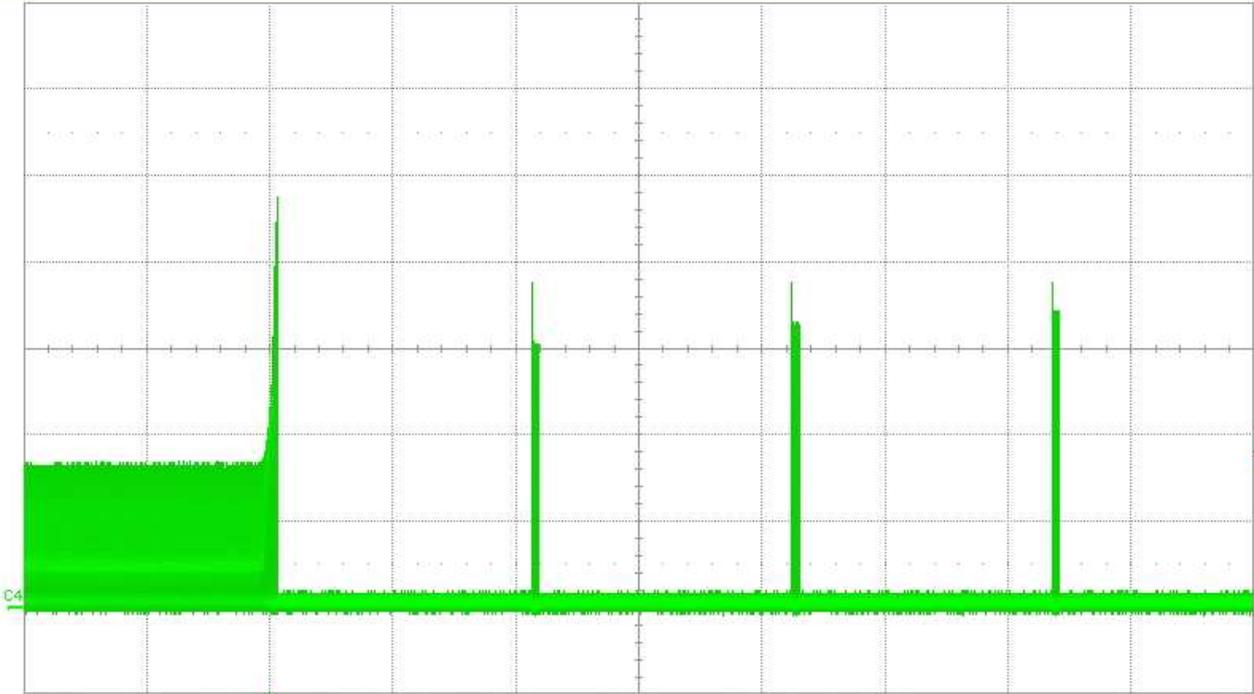

Measure  
value  
status


P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
---	---	---	---	---	---
⚠	⚠	⚠	⚠	⚠	⚠

C4 BwL DC  
100 mA/div  
-301.0 mA  
TELEDYNE LECROY

Zeitbasis	-15.0 s	Trigger	C4 DC
Roll	5.00 s/div	Stopp	180 mA
5.00 MS	100 kS/s	Edge	Negativ

4/11/2017 2:04:18 PM

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

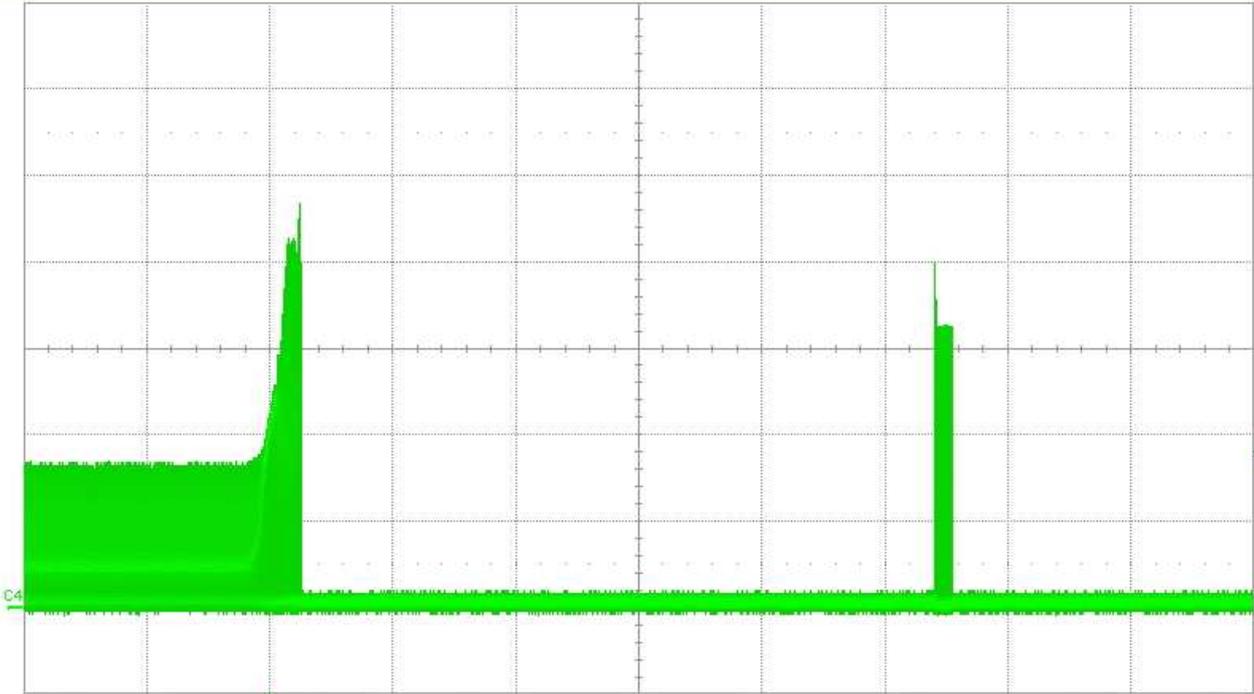

**Measure**  
value  
status


P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
---	---	---	---	---	---
⚠	⚠	---	---	---	---

C4 BwL DC  
100 mA/div  
-301.0 mA  
**TELEDYNE LECROY**

Zeitbasis	-6.00 s	Trigger	C4 DC
Roll	2.00 s/div	Stopp	180 mA
5.00 MS	250 kS/s	Edge	Negativ

4/11/2017 2:05:01 PM

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

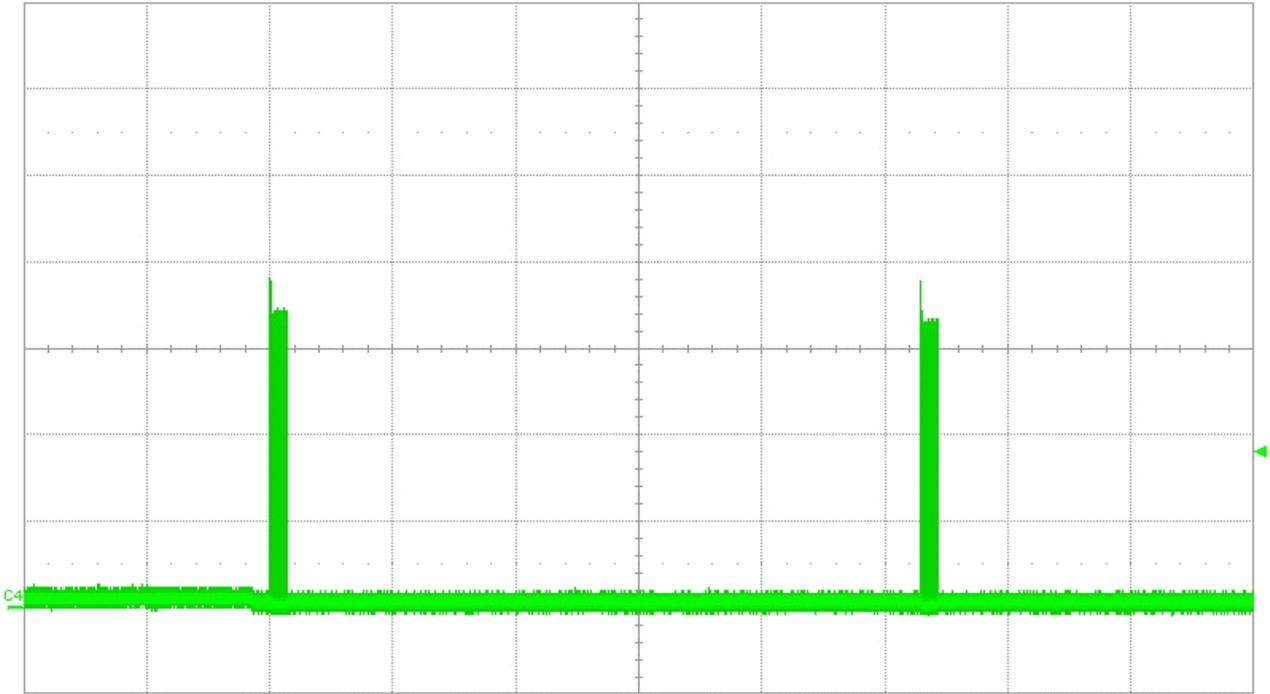


Measure	P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
value	---	82.924 %				
status	⚠	⚠	⚠			

C4 BwL DC  
100 mA/div  
-301.0 mA  
TELEDYNE LECROY

Zeitbasis -6.00 s Trigger C4 DC  
Roll 2.00 s/div Stopp 180 mA  
5.00 MS 250 kS/s Edge Negativ  
4/11/2017 2:05:45 PM

Datei Vertikal Zeitbasis Trigger Anzeige Cursor Messung Mathe Analyse Utilities Hilfe

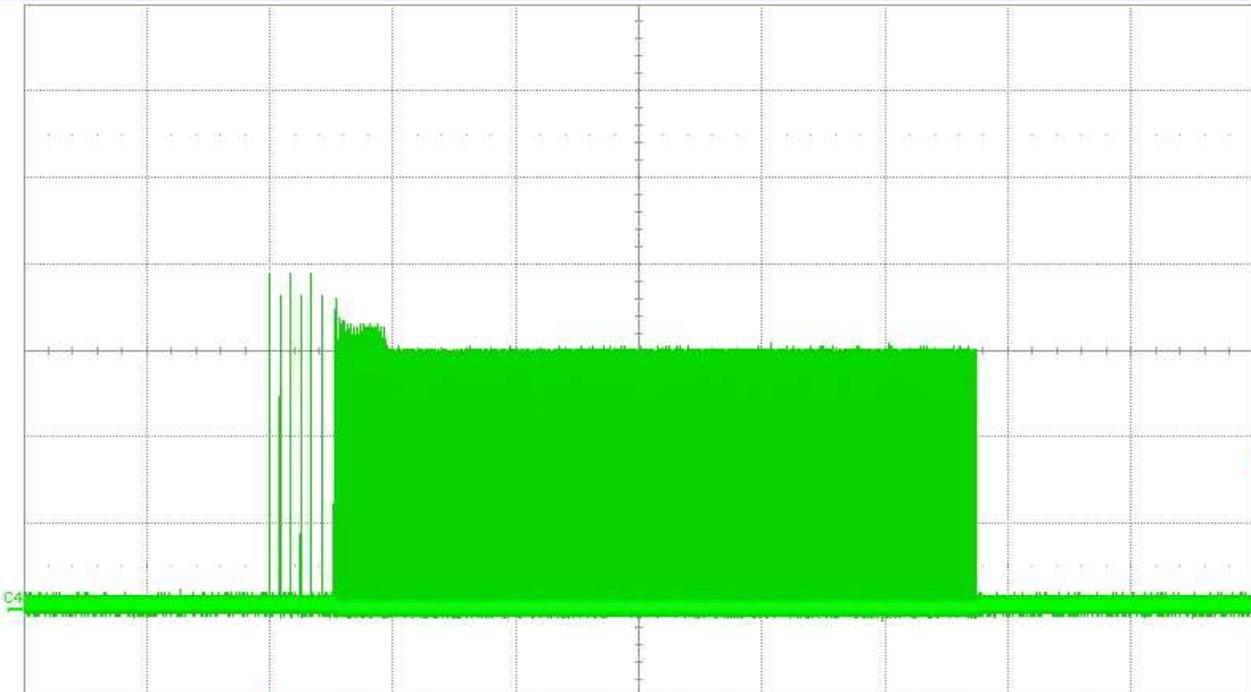

Measure	P1:freq(C1)	P2:duty(C1)	P3:mean(C4)	P4:max(C3)	P5:freq(C1)	P6:duty(C1)
value	---	39.345 %	---	---	---	---
status	---	---	---	---	---	---

C4 BwL DC  
100 mA/div  
-301.0 mA

TELEDYNE LECROY

Zeitbasis -150 ms Trigger C4 DC  
50.0 ms/div Stopp 180 mA  
5.00 MS 10 MS/s Edge Negativ

4/11/2017 2:06:23 PM


### 3.5 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

8.500 1/min at free air flow	PWM >= 95 %;		
------------------------------	--------------	--	--

Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )	58,0 m <sup>3</sup> /h	
Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ )	215 Pa	

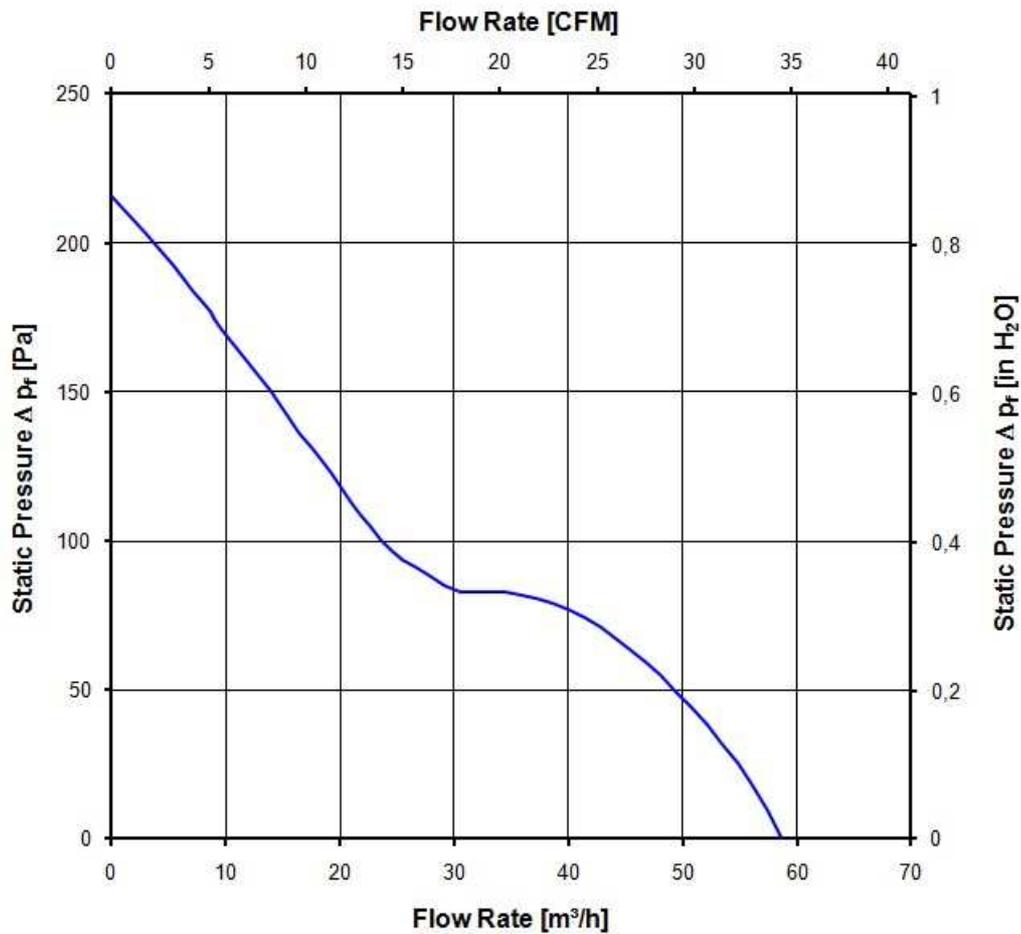

**3.6 Sound Data**

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

8.500 1/min at free air flow	PWM $\geq 95 \%$ ;		
------------------------------	--------------------	--	--

Optimal operating point	40,0 m <sup>3</sup> /h @ 77 Pa		
Sound power level at the optimal operating point	6,1 bel(A)		
Sound pressure level at free air flow, measured in rubber bands	44,0 dB(A)		

**4 Environment**

**4.1 General**

Min. permitted ambient temperature TU min.	-40 °C		
Max. permitted ambient temperature TU max.	70 °C		
Min. permitted storage temperature TL min.	-40 °C		
Max. permitted storage temperature TL max.	80 °C		

**4.2 Climatic Requirements**

Humidity requirements	humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days		
Water exposure	Immersion test IPX8; according to DIN EN 60529 VDE 0470, not certified		
Dust requirements	Dust check IP6X; according to DIN EN 60529 VDE 0470, not certified		
Salt fog requirements	Salt fog, constant, (Bellcore II); according to DIN EN 60068-2-22, 30 days, operation at nominal speed		

Permitted application area:

The product is for the use in open and unsheltered areas. Direct exposure to water as well as saline ambient conditions are allowed provided that this does not prevent the normal operation.

Pollution degree 4 (according DIN EN 60664-1)

It occurs permanent conductivity caused by conductive dust, rain or moisture.

Please require severity levels and specification parameters from the responsible development departments.

**5 Safety****5.1 Electrical Safety**

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min.	
B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	850 VDC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
Clearance / creepage distance	1,0 mm / 1,5 mm	
Protection class	III	

**5.2 Approval Tests**

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

**6 Reliability****6.1 General**

Life expectancy L10 at TU = 40 °C	75.000 h	
Life expectancy L10 at TU max.	37.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	127.500 h	

