

8300100022

VBH0190RSLDS

# EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                       |            |
|--------------------------|-----------------------|------------|
| Item                     | 8300100022            |            |
| Motor                    | E06002-17 (M3G060-BH) |            |
| Phase                    |                       | 1~         |
| Nominal voltage          | VAC                   | 230        |
| Nominal voltage range    | VAC                   | 200 .. 240 |
| Frequency                | Hz                    | 50/60      |
| Method of obtaining data |                       | ml         |
| Speed (rpm)              | min <sup>-1</sup>     | 3650       |
| Power consumption        | W                     | 120        |
| Current draw             | A                     | 1.0        |
| Min. ambient temperature | °C                    | -25        |
| Max. ambient temperature | °C                    | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



8300100022

VBH0190RSLDS

# EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 1.55 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Size                                                                       | 190 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Motor size                                                                 | 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Rotor surface                                                              | Thick-film passivated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Housing material                                                           | PA plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Installation position                                                      | Any                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Condensation drainage holes                                                | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Locked-rotor detection</li> <li>- Tach output</li> <li>- Speed control</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Protection class assignment                                                | <p>I; If a protective earth is connected by the customer</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection.</p>                                                                                                                                                                                                       |
| Conformity with standards                                                  | EN 60034-1; EN 60204-1; EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Comment on CE                                                              | Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.                                                                                                                                                                                                                                                                                                                                                                                                       |




8300100022

VBH0190RSLDS

## EC centrifugal module - RadiCal

backward-curved, single-intake  
with housing

### Product drawing

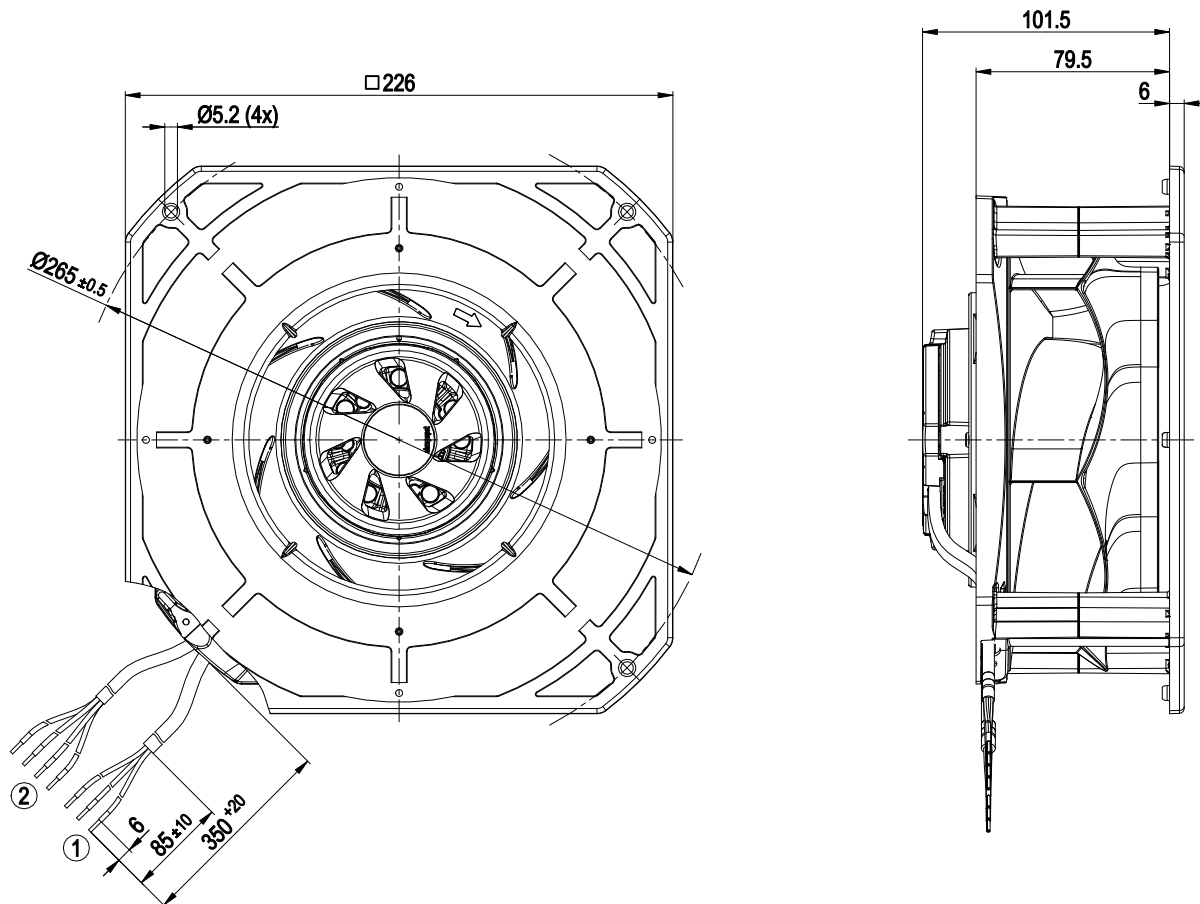

|   |                               |
|---|-------------------------------|
| 1 | Supply line (PWR) PVC AWG20   |
|   | 3x splice                     |
| 2 | Control wire (CTRL) PVC AWG22 |
|   | 4x splice                     |




8300100022  
VBH0190RSLDS

## EC centrifugal module - RadiCal

backward-curved, single-intake  
with housing

### Mounting dimensions

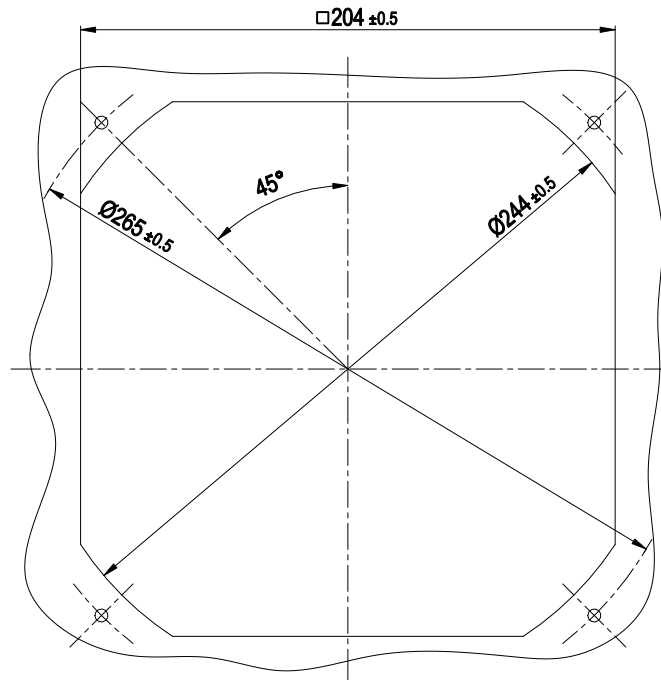

# EC centrifugal module - RadiCal

backward-curved, single-intake  
with housing

Connection diagram



| No. | Conn. | Designation | Color        | Function/assignment                                                                                                                                                                                                                                              |
|-----|-------|-------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | PWR   | L           | black        | Power supply, phase, see nameplate for voltage range                                                                                                                                                                                                             |
|     | PWR   | N           | blue         | Power supply, neutral conductor, see nameplate for voltage range                                                                                                                                                                                                 |
|     | PWR   | PE          | green/yellow | Protective earth                                                                                                                                                                                                                                                 |
|     |       |             |              |                                                                                                                                                                                                                                                                  |
|     | CTRL  | GND         | blue         | Reference ground for control interface, SELV                                                                                                                                                                                                                     |
|     | CTRL  | IO1         | yellow       | Factory setting:<br>Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz,<br>Function: Speed set value<br>Characteristic curve parameterizable (see "Input curve 1"), SELV<br>Function parameterizable at the factory (see Optional interface functions table) |
|     | CTRL  | IO2         | white        | Factory setting:<br>Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output<br>1 pulse/revolution, SELV<br>Function parameterizable at factory (see table Optional interface functions)                                                           |
|     | CTRL  | Vout        | red          | Voltage output 10 VDC +/-3%, Imax=10 mA<br>Short-circuit-proof, power supply for external devices, SELV                                                                                                                                                          |



Terminal/plug assignment

|      |                                   | electrical specification |                                                                                                                                                                                                    |        |                                         |  |  |  |  |
|------|-----------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------------------|--|--|--|--|
| IO1  | configurable IO mode              | electrical specification | active: parameterizable voltage x-30 VDC<br>not active: pin open or parameterizable voltage <x VDC, SELV<br>Ri = 100 kΩ, characteristic curve parameterizable, f <sub>PWM</sub> = 1k..10 kHz, SELV |        |                                         |  |  |  |  |
|      |                                   |                          |                                                                                                                                                                                                    |        |                                         |  |  |  |  |
| IO2  | Din1 (high active): digital input |                          |                                                                                                                                                                                                    | INPUT  | switch: parameter set: #1 / #2          |  |  |  |  |
|      | Ain1 0-10 V/PWM: analog input     |                          |                                                                                                                                                                                                    |        | switch: direction of rotation: cw / ccw |  |  |  |  |
|      | Tach out (open collector)         |                          |                                                                                                                                                                                                    |        | switch: enable/disable input            |  |  |  |  |
|      | Diagnostics out (open collector)  |                          |                                                                                                                                                                                                    |        | configurable function                   |  |  |  |  |
|      | Alarm out (open collector)        |                          |                                                                                                                                                                                                    |        | signal: tach out                        |  |  |  |  |
| Vout | Open collector                    |                          |                                                                                                                                                                                                    | OUTPUT | signal: diagnostics out                 |  |  |  |  |
|      | Voltage output                    |                          |                                                                                                                                                                                                    |        | signal: alarm out                       |  |  |  |  |
|      |                                   |                          |                                                                                                                                                                                                    |        | signal: run monitoring                  |  |  |  |  |
|      |                                   |                          |                                                                                                                                                                                                    |        | signal: status                          |  |  |  |  |
|      |                                   |                          |                                                                                                                                                                                                    |        | signal: configurable function           |  |  |  |  |

Basic (B4)  
Factory configuration option upon request

Factory configuration option



8300100022


VBH0190RSLDS

# EC centrifugal module - RadiCal

backward-curved, single-intake

with housing

## Curves: Air performance 50 Hz

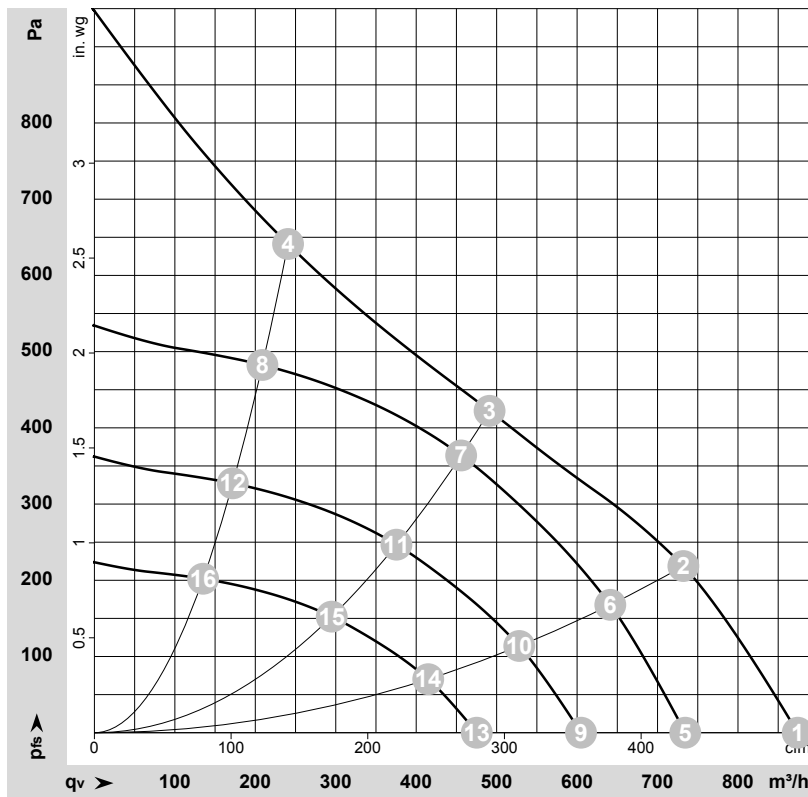

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-211981-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 1~    | 230 | 50 | 4045              | 120            | 1.00 | 71                | 78                | 875               | 0               | 515            | 0.00            |
| 2  | 1~    | 230 | 50 | 3885              | 120            | 1.00 | 66                | 74                | 730               | 220             | 430            | 0.88            |
| 3  | 1~    | 230 | 50 | 3650              | 120            | 1.00 | 63                | 71                | 490               | 420             | 290            | 1.69            |
| 4  | 1~    | 230 | 50 | 3915              | 120            | 1.00 | 70                | 77                | 240               | 640             | 140            | 2.57            |
| 5  | 1~    | 230 | 50 | 3400              | 71             | 0.58 | 67                | 74                | 735               | 0               | 435            | 0.00            |
| 6  | 1~    | 230 | 50 | 3400              | 80             | 0.66 | 63                | 70                | 640               | 168             | 375            | 0.67            |
| 7  | 1~    | 230 | 50 | 3400              | 96             | 0.80 | 62                | 69                | 455               | 366             | 270            | 1.47            |
| 8  | 1~    | 230 | 50 | 3400              | 78             | 0.65 | 66                | 73                | 210               | 483             | 125            | 1.94            |
| 9  | 1~    | 230 | 50 | 2800              | 40             | 0.32 | 62                | 69                | 605               | 0               | 355            | 0.00            |
| 10 | 1~    | 230 | 50 | 2800              | 45             | 0.37 | 58                | 66                | 530               | 114             | 310            | 0.46            |
| 11 | 1~    | 230 | 50 | 2800              | 54             | 0.45 | 57                | 64                | 375               | 249             | 220            | 1.00            |
| 12 | 1~    | 230 | 50 | 2800              | 44             | 0.36 | 61                | 68                | 170               | 328             | 100            | 1.32            |
| 13 | 1~    | 230 | 50 | 2200              | 19             | 0.16 | 56                | 63                | 475               | 0               | 280            | 0.00            |
| 14 | 1~    | 230 | 50 | 2200              | 22             | 0.18 | 52                | 60                | 415               | 70              | 245            | 0.28            |
| 15 | 1~    | 230 | 50 | 2200              | 26             | 0.22 | 51                | 58                | 295               | 153             | 175            | 0.61            |
| 16 | 1~    | 230 | 50 | 2200              | 21             | 0.18 | 55                | 62                | 135               | 202             | 80             | 0.81            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

