

8300100086
VBS0355CTRLS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100086	
Motor	E11233-60	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3800
Power consumption	W	2750
Current draw	A	4.3
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	72.8	56.1	09 Power consumption P_{ed}	kW	2.72
02 Measurement category		A		09 Air flow q_v	m ³ /h	5340
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1270
04 Efficiency grade N		78.7	62	10 Speed (rpm) n	min ⁻¹	3795
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-215843

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



Technical description

Weight	11.68 kg
Size	355 mm
Motor size	112
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection

8300100086
VBS0355CTRLS


EC centrifugal fan - RadiPac

backward-curved, single-intake

Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; EAC; CSA C22.2 No. 77 + CAN/CSA-E60730-1




Product drawing

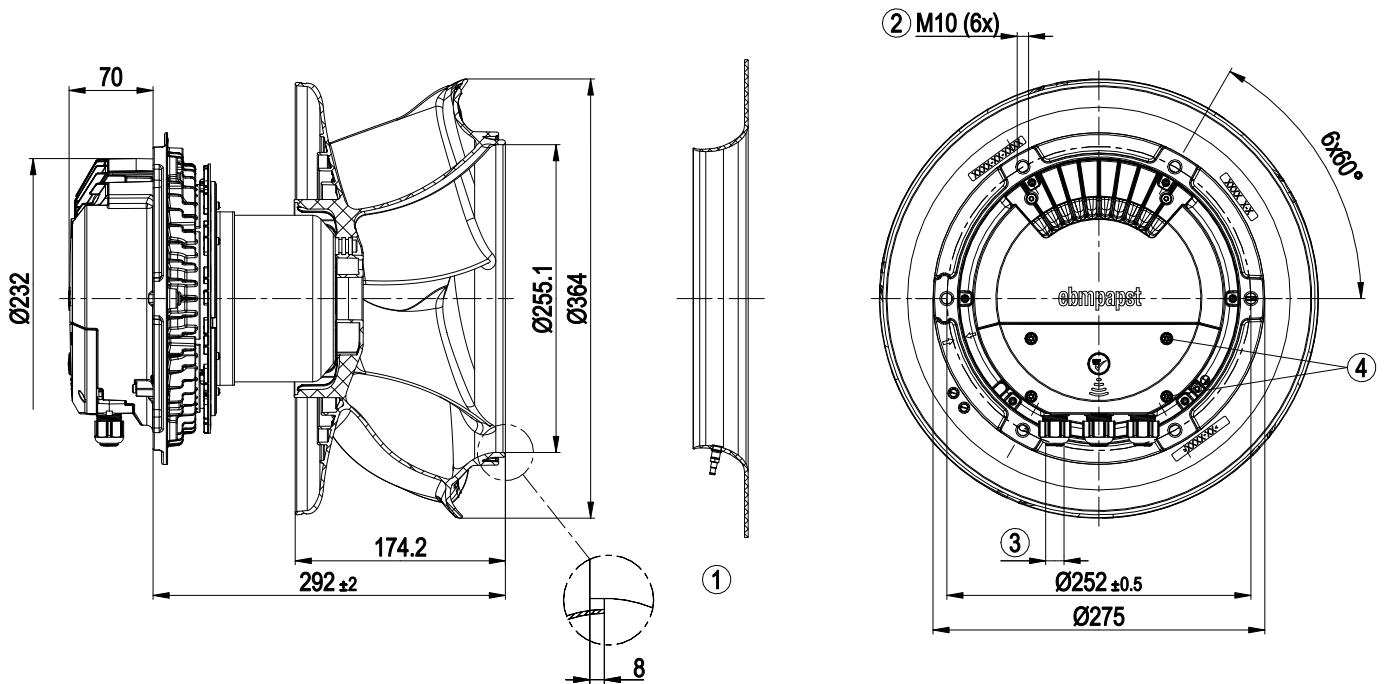

1	Accessory part: Inlet ring 8217102240 with pressure tap (k-factor: 145) (not included in scope of delivery)
2	Max. clearance for screw 20 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 1.5 ± 0.2 Nm

Accessory part

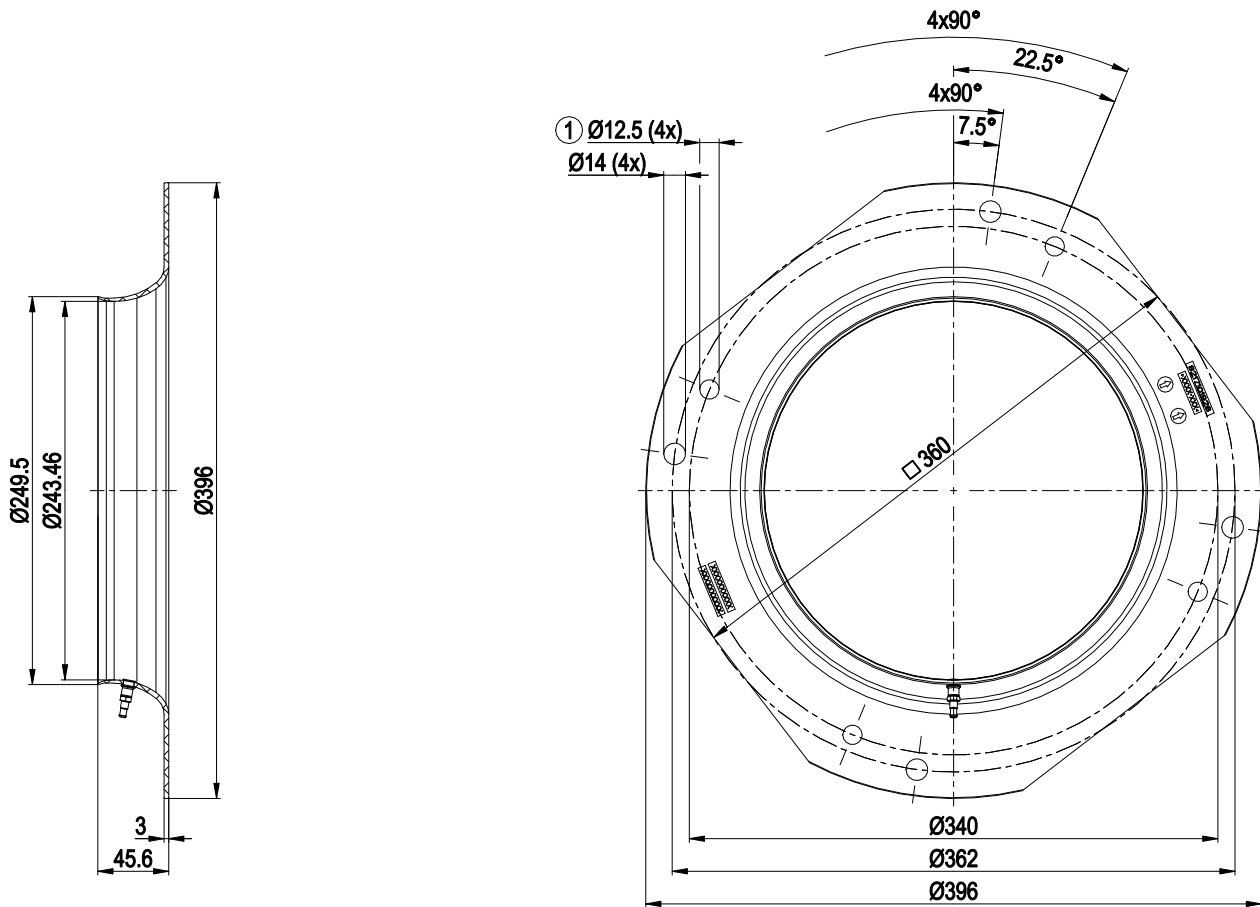


Inlet ring 8217102240 with pressure tap (k-factor: 145)

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 00400-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
|---|--|

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram

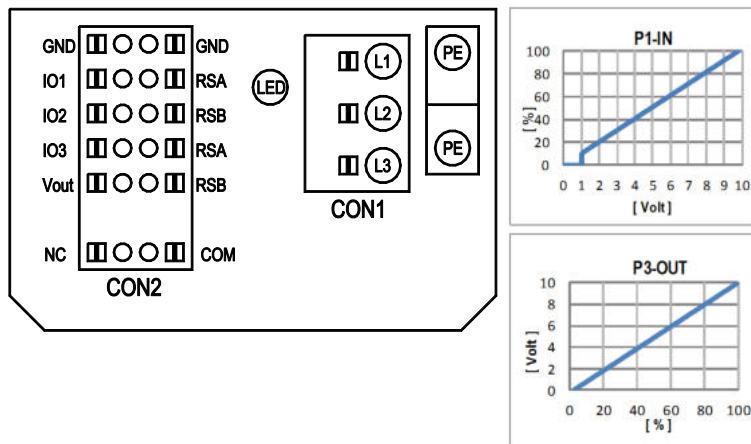

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment


configurable option																				
For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3																				
CON2	IO1	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	D101 [...]	D147 [...]	D104 [...]	D12E [...]	D148 [...]	D16C [...]	D16A [...]	(selected directly via IO mode)	D130 [0]	D130 [1]	D130 [2]	D130 [5]	D00C [1]	D130 [4]
							switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing		
							switch: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing	
							source: set value	source: sensor value	switch: parameter set: #1 / #2	switch: control function: heating (pos.) / cooling (neg.)	switch: direction of rotation: cw / ccw	switch: set value source	switch: fan enable / disable	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	signal: system modulation level %	signal: remote control output 0-10V	pulse input for auto-addressing
	IO2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	D159 [0]	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]			
							active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV RI = 125R, characteristic curve parameterizable, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC							
	IO3	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	D159 [0]	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]			
							active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC							
							active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC							
							active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC							
RSA RSB	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	D159 [0]	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]				
						active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC								
Vout	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	source: set value	D159 [0]	D159 [2]	D159 [3]	D15A [0]	D15A [1]	D15A [7]	D15A [8]	D15A [4]	D15A [5]	D15A [6]	D16E [...]				
						active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC, SELV active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1,5VDC, SELV	function parameterizable, max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV 0-10V/max. 5mA max output frequency 300Hz, SELV	MODBUS RTU, specification V6.3, SELV	voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV 15...50VDC								

◦ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3



Curves: Air performance 50 Hz

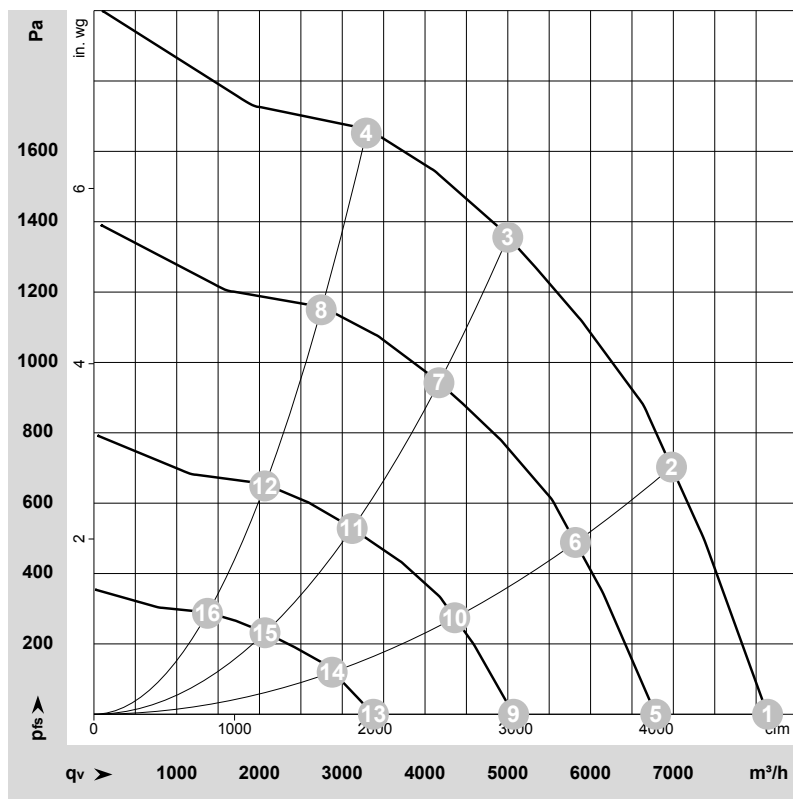

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-215843-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	3800	1772	2.81	89	96	99	8140	0	4790	0.00
2	3~	400	50	3800	2494	3.87	81	89	93	6980	700	4105	2.81
3	3~	400	50	3800	2750	4.30	75	83	89	5000	1350	2945	5.42
4	3~	400	50	3800	2582	4.00	79	87	92	3290	1650	1940	6.62
5	3~	400	50	3165	1067	1.79	83	91	94	6785	0	3995	0.00
6	3~	400	50	3165	1476	2.37	76	84	88	5815	488	3425	1.96
7	3~	400	50	3165	1615	2.57	70	78	84	4170	943	2455	3.79
8	3~	400	50	3165	1531	2.45	75	83	88	2745	1158	1615	4.65
9	3~	400	50	2370	503	1.04	75	83	86	5070	0	2985	0.00
10	3~	400	50	2375	680	1.28	68	76	80	4360	274	2565	1.10
11	3~	400	50	2370	733	1.34	63	71	77	3120	528	1835	2.12
12	3~	400	50	2370	698	1.30	67	74	79	2065	655	1215	2.63
13	3~	400	50	1580	189	0.55	64	73	76	3375	0	1985	0.00
14	3~	400	50	1580	238	0.64	58	66	70	2880	120	1695	0.48
15	3~	400	50	1580	254	0.66	54	62	67	2065	232	1215	0.93
16	3~	400	50	1580	245	0.65	55	62	67	1370	289	810	1.16

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase