

8300100172
VFS0160XSLFS

EC centrifugal fan

forward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100172	
Motor	E06003-30	

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2000
Power consumption	W	165
Current draw	A	1.3
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	44.5	32.7	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	335
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	693
04 Efficiency grade N		55.8	44	10 Speed (rpm) n	min ⁻¹	3090
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-216424

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100172
VFS0160XSLFS

EC centrifugal fan

forward-curved, single-intake

Technical description


Weight	1.54 kg
Size	160 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Life expectancy	40,000 h at 55 °C ambient temperature
Technical features	<ul style="list-style-type: none">- Output 10 VDC, max. 10 mA- Locked-rotor detection- Tach output- Speed control- Power limiter- Motor current limitation- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300100172
VFS0160XSLFS

EC centrifugal fan

forward-curved, single-intake

Product drawing

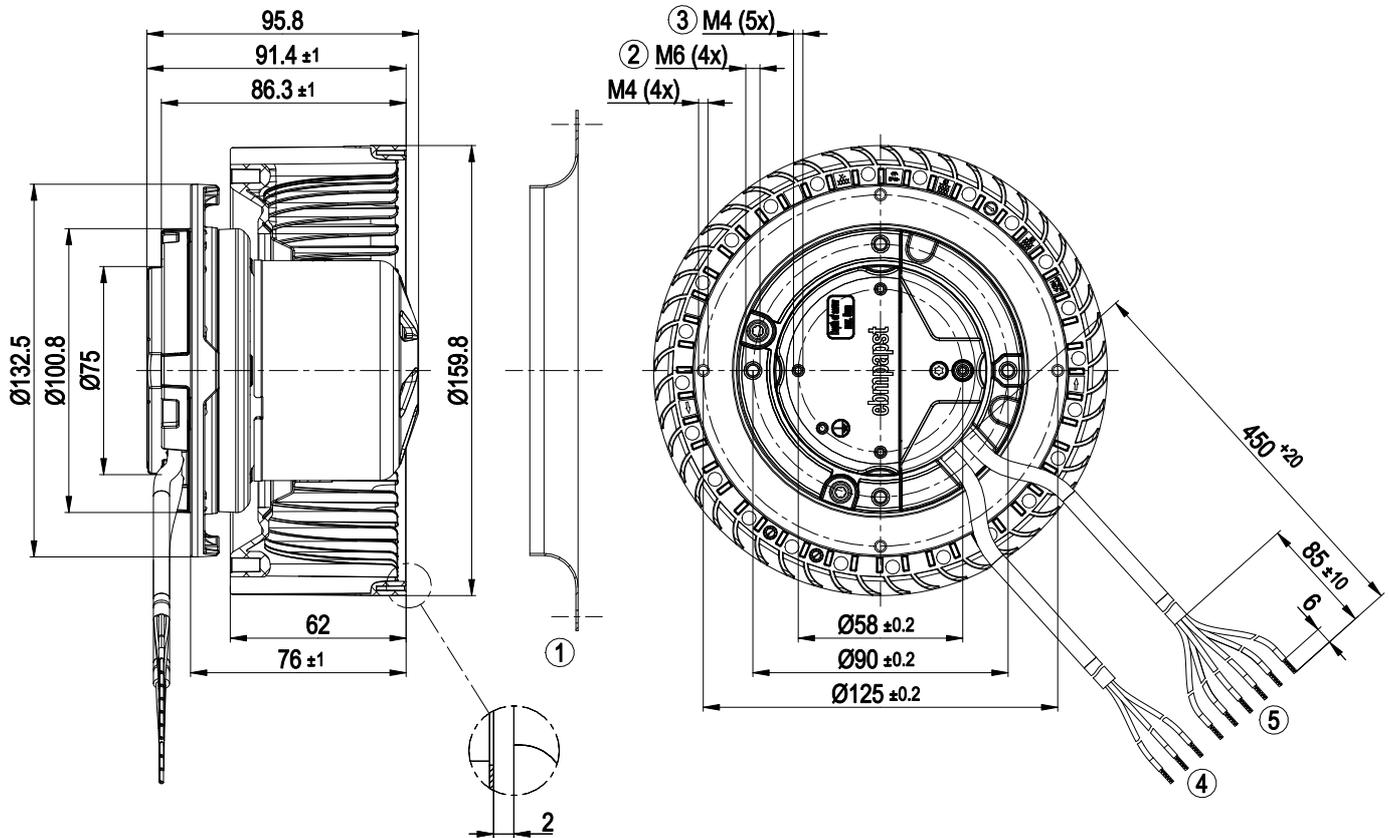


1	Accessory part: Inlet ring 09588-2-4013 (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20 3x splice
5	Control wire (CTRL) PVC AWG22 6x splice

8300100172
VFS0160XSLFS

EC centrifugal fan

forward-curved, single-intake

Accessory part

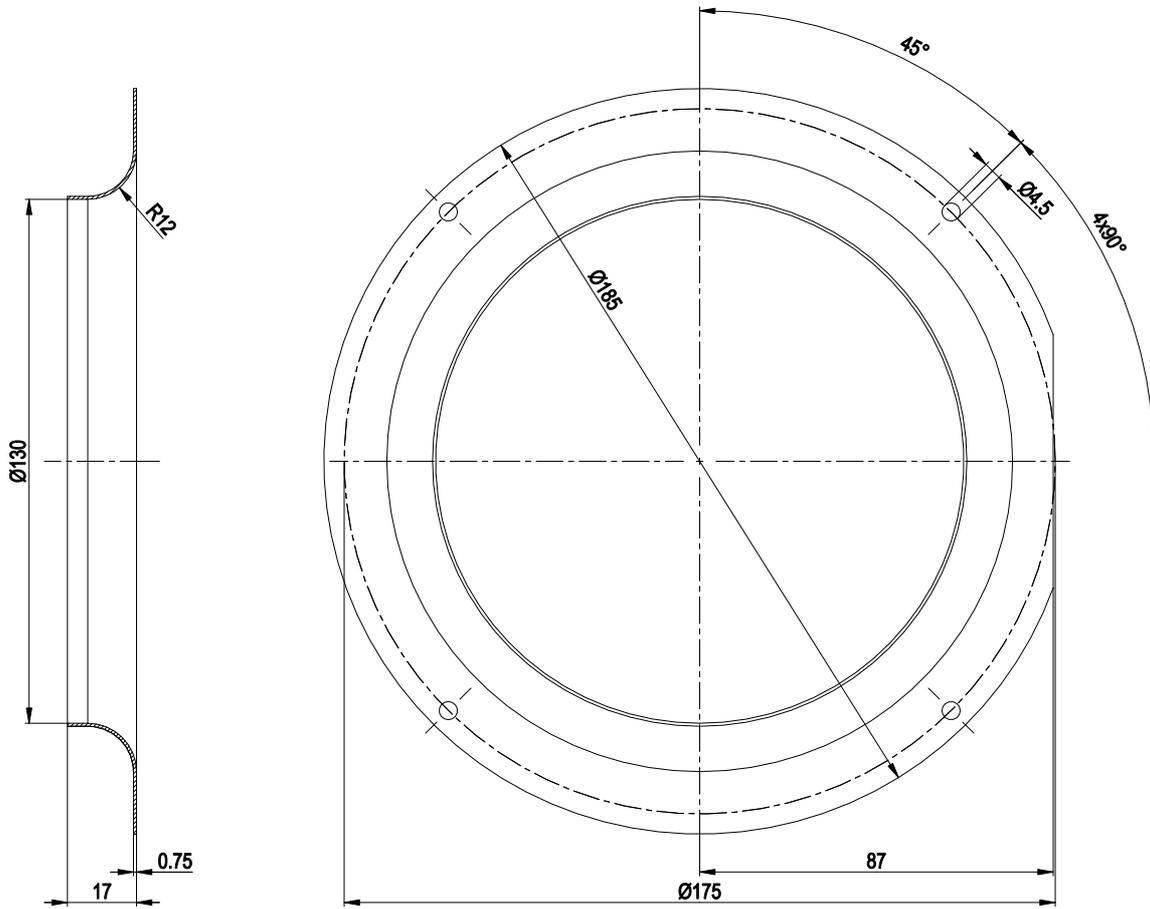


Inlet ring 09588-2-4013

8300100172
VFS0160XSLFS

EC centrifugal fan

forward-curved, single-intake

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, I _{max} = 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function


Terminal/plug assignment

	configurable IO mode	electrical specification					
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV					
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{ k}..10\text{ kHz}$, SELV					
IO2	◦ Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
	◦ Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
	◦ Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV					
Vout	◦ Open collector	Umax=50 VDC, Imax=10 mA, SELV					
	Voltage output	Voltage 10 VDC, SELV					
	source: set value		◦				
	switch: parameter set: #1 / #2		◦				
	switch: direction of rotation: cw / ccw		◦				
	switch: enable/disable input		◦				
	configurable function		◦	◦			
	signal: tach out				◦		
	signal: diagnostics out					◦	
	signal: alarm out						◦
	signal: run monitoring						◦
	signal: status						◦
	signal: configurable function						◦

Basic (B4) Factory configuration option upon request

- Factory configuration option

Curves: Air performance 50 Hz

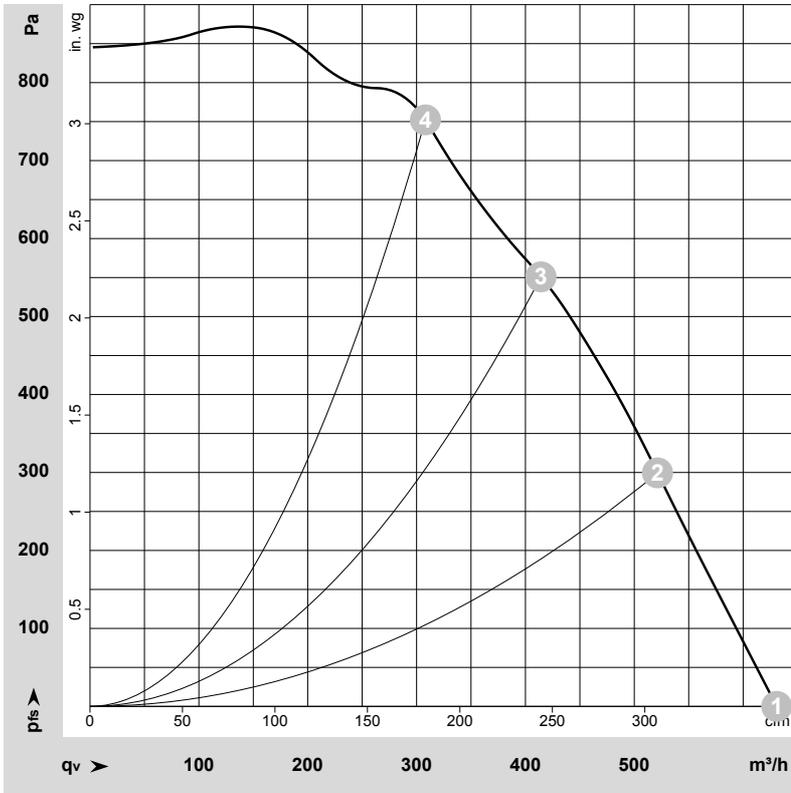

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-216424-1
Date: 2021-10-18
Nozzle: 03489-2-2517

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P_e	I	LpA_{in}	LwA_{in}	q_v	p_{fs}	q_v	p_{fs}
		V	Hz	min^{-1}	W	A	dB(A)	dB(A)	m^3/h	Pa	cfm	in. wg
1	1~	230	50	2000	165	1.30	70	76	630	0	370	0.00
2	1~	230	50	2400	165	1.30	68	75	520	300	305	1.20
3	1~	230	50	2800	165	1.30	69	75	415	550	245	2.21
4	1~	230	50	3205	165	1.30	70	77	310	750	180	3.01

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase