

8300100470

VCS0225RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100470	
Motor	E06002-23	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	2500
Power consumption	W	120
Current draw	A	1.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change



8300100470
VCS0225RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Technical description

Weight	2.58 kg
Size	225 mm
Motor size	60
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.



VCS0225RSLES

backward-curved, single-intake
with housing (flange)


[illegible]

1	Supply line (PWR) PVC AWG20
	3x splice
2	Control wire (CTRL) PVC AWG22
	4x splice
3	Tapping hole prepared for self-tapping screw for fastening plastics (Remform) dia. 4 mm, max. screw-in depth 15 mm, torque is to be determined depending on the screw.
4	5x sheet metal nut for thread EN ISO 1478-ST4.8 (max. screw length 16 mm plus thickness of mounting material)
5	Screw-on domes are only permissible for Flowgrid!
6	Connecting sleeve not suitable for installation with pipe clamps

EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV



8300100470
VCS0225RSLES

EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)

Terminal/plug assignment

		electrical specification		configurable IO mode	
IO1	source: set value		○		
	switch: parameter set: #1 / #2		○		
	switch: direction of rotation: cw / ccw		○		
	switch: enable/disable input		○		
	configurable function		○		
IO2	signal: tach out			○	
	signal: diagnostics out			○	
	signal: alarm out				○
	signal: run monitoring				○
	signal: status				○
Vout	signal: configurable function				○
	signal: tach out			○	
	signal: diagnostics out			○	
	signal: alarm out				○
	signal: run monitoring				○
IO1	active: parameterizable voltage x-30 VDC				
	not active: pin open or parameterizable voltage <x VDC, SELV				
	RI = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV				
	U _{max} =50 VDC, I _{max} =10 mA, SELV				
	U _{max} =50 VDC, I _{max} =10 mA, SELV				
IO2	Tach out (open collector)				
	Diagnostics out (open collector)				
	Alarm out (open collector)				
	Open collector				
	Voltage output				

Basic (B4)

Factory configuration option upon request


○ Factory configuration option



EC centrifugal fan - RadiCal

backward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

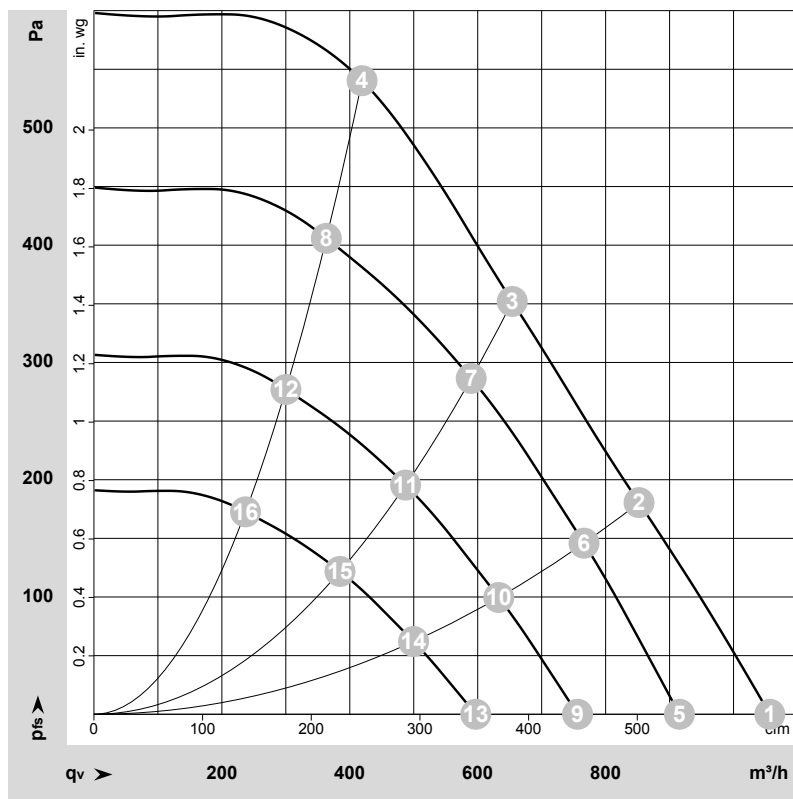

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-220059-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2655	117	0.97	70	75	1055	0	620	0.00
2	1~	230	50	2560	120	1.00	67	71	850	180	500	0.72
3	1~	230	50	2500	120	1.00	64	69	655	350	385	1.41
4	1~	230	50	2655	113	0.95	65	70	420	540	245	2.17
5	1~	230	50	2300	76	0.63	66	71	915	0	540	0.00
6	1~	230	50	2300	86	0.72	64	69	765	146	450	0.59
7	1~	230	50	2300	87	0.73	61	66	590	286	345	1.15
8	1~	230	50	2300	73	0.62	62	67	365	406	215	1.63
9	1~	230	50	1900	43	0.36	62	66	755	0	445	0.00
10	1~	230	50	1900	49	0.41	59	64	635	100	375	0.40
11	1~	230	50	1900	49	0.41	56	61	485	195	285	0.78
12	1~	230	50	1900	41	0.35	57	62	300	277	175	1.11
13	1~	230	50	1500	21	0.18	56	60	595	0	350	0.00
14	1~	230	50	1500	24	0.20	53	58	500	62	295	0.25
15	1~	230	50	1500	24	0.20	50	55	385	122	225	0.49
16	1~	230	50	1500	20	0.17	51	56	235	173	140	0.69

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

