

8300100631  
VCH0500CTTRS

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with housing

**ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG**  
Bachmühle 2 · D-74673 Mulfingen  
Phone +49 7938 81-0  
info1@de.fansco.com  
www.fansco.com

Limited partnership · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRA 590344  
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Item                     | 8300100631        |            |
| Motor                    | E15034-120        |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Status                   |                   | prelim.    |
| Speed (rpm)              | min <sup>-1</sup> | 2840       |
| Power consumption        | W                 | 6210       |
| Current draw             | A                 | 9.6        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

|                                   |   | Actual | Req. 2015 |                               |                   |       |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|-------|
| 01 Overall efficiency $\eta_{es}$ | % | 75.6   | 59.9      | 09 Power consumption $P_{ed}$ | kW                | 6.24  |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m³/h              | 10165 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 1620  |
| 04 Efficiency grade N             |   | 77.7   | 62        | 10 Speed (rpm) n              | min <sup>-1</sup> | 2835  |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.02  |

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-223311

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100631

VCH0500CTTRS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 67.7 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Size                                                                       | 500 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor size                                                                 | 150                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Housing material                                                           | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Support plate material                                                     | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Support bracket material                                                   | Steel, painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Inlet nozzle material                                                      | ABS plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Ambient temperature note                                                   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Installation position                                                      | See legend on product drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.3</li> <li>- Motor current limitation</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> <li>- Vibration sensor</li> </ul> |
| Power Factor Correction (PFC)                                              | Passive (through low-capacitance DC link)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

8300100631  
VCH0500CTTRS

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with housing

|                             |                                                                                                                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protection class assignment | I; If a protective earth is connected.<br>The built-in component has several local protection class assignments.<br>The final protection class is determined by the intended installation. |
| Conformity with standards   | EN 61800-5-1; CE; UKCA                                                                                                                                                                     |
| Approval                    | CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1                                                                                                                              |

VCH0500CTTRS

backward-curved, single-intake  
with housing

Technical drawings of the EKO 1000 unit, showing front, side, and rear views with dimensions and callouts.

**Front View (Left):** Shows a square unit with a circular fan grille. Dimensions include a 4x90° fan angle, a 15° mounting angle, a Ø10 (4x) mounting hole (callout 6), a Ø440 fan grille, and a 735 square mounting plate.

**Side View (Middle):** Shows the unit's profile. Dimensions include a 363 unit width, a 456.9 ± 2.5 unit depth, and a 550.9 ± 3 unit total depth. Callouts 5 and 21 point to specific components.


**Rear View (Right):** Shows the unit's internal structure and mounting points. Dimensions include a 582 square mounting plate, a 540 square mounting plate, a 15° mounting angle, a 4.6 unit depth, and a Ø11 (4x) mounting hole. Callouts 1, 2, 3, and 4 point to specific components. Mounting holes are labeled M20x1.5 (2x) and M25x1.5.

|   |                                                                                                                                          |
|---|------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm                                                                   |
| 3 | Cable diameter min. 5 mm, max. 14 mm, tightening torque $6 \pm 0.9$ Nm                                                                   |
|   | (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)  |
| 4 | Tightening torque $3 \pm 0.3$ Nm                                                                                                         |
| 5 | Inlet ring with pressure tap (k-factor: 290)                                                                                             |
| 6 | Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required   |

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with housing

## Connection diagram

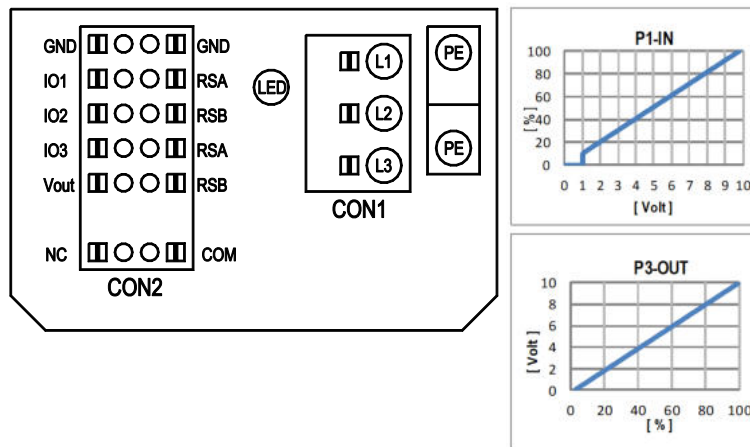

| No. | Conn. | Designation | Function/assignment                                                                                                                                                                                                                                                                                                                             |
|-----|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | CON1  | L1, L2, L3  | Power supply, phase, see nameplate for voltage range                                                                                                                                                                                                                                                                                            |
|     | PE    | PE          | Protective earth                                                                                                                                                                                                                                                                                                                                |
|     | CON2  | RSA         | RS485 interface for MODBUS, RSA; SELV                                                                                                                                                                                                                                                                                                           |
|     | CON2  | RSB         | RS485 interface for MODBUS, RSB; SELV                                                                                                                                                                                                                                                                                                           |
|     | CON2  | GND         | Reference ground for control interface, SELV                                                                                                                                                                                                                                                                                                    |
|     | CON2  | IO1         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Digital input - high active, function: Disable input, SELV<br>- inactive: Pin open or applied voltage < 1.5 VDC<br>- active: applied voltage 3.5-50 VDC<br>Reset function: Triggering of error reset on change of state from "enabled" to "disabled" |
|     | CON2  | IO2         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value<br>Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV                                                                                                         |
|     | CON2  | IO3         | Function parameterizable (see "Optional interface functions" table)<br>Factory setting:<br>Analog output 0-10 V, max. 5 mA, function: Actual speed<br>Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV                                                                                                        |
|     | CON2  | Vout        | Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable<br>Factory setting: 10 VDC<br>short-circuit-proof, supply for external devices, SELV<br>alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage                                                                                                 |
|     | CON2  | COM         | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side                                                                                                                                                                   |
|     | CON2  | NC          | Status relay, floating status contact, break for failure                                                                                                                                                                                                                                                                                        |
|     |       | LED         | green: status = good, ready for operation<br>orange: status = warning<br>red: status = failure                                                                                                                                                                                                                                                  |
|     |       | P1-IN       | Input characteristic curve                                                                                                                                                                                                                                                                                                                      |
|     |       | P3-OUT      | Output characteristic curve                                                                                                                                                                                                                                                                                                                     |

EC centrifugal module - RadiPac  
backward-curved, single-intake  
with housing

Terminal/plug assignment

|                     |                                                                                                              |                                                                                                                               |            |                                             |                                                           |                          |                                 |          |                                |          |                      |          |                                   |          |                                     |          |   |                                  |          |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---------------------|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------|-----------------------------------------------------------|--------------------------|---------------------------------|----------|--------------------------------|----------|----------------------|----------|-----------------------------------|----------|-------------------------------------|----------|---|----------------------------------|----------|--|--|--|--|--|--|--|--|--|--|--|--|--|
| configurable option |                                                                                                              | For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3 |            | configurable IO functions: normal / inverse | MODBUS Register for IO mode configuration                 | electrical specification | configurable IO mode            | CON2     | OUTPUT                         |          |                      |          |                                   |          |                                     |          |   |                                  |          |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     |                                                                                                              |                                                                                                                               |            |                                             |                                                           |                          |                                 |          | INPUT                          |          |                      |          |                                   |          |                                     |          |   |                                  |          |  |  |  |  |  |  |  |  |  |  |  |  |  |
| IO1                 | ○ Din1 (active high): digital input                                                                          | active: applied voltage 3.5-50VDC, SELV<br>not active: pin open or applied voltage < 1.5VDC                                   | D158 [0]   | ○                                           | switch: fan enable / disable                              | D16A [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Ain1 0-10V/PWM: analog input                                                                               | RI = 100K, characteristic curve parameterizable, f <sub>PWM</sub> = 1k..10kHz, SELV                                           | D158 [2]   | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Tach out (open collector output)                                                                           | Umax = 50VDC, Imax = 20mA, SELV                                                                                               | D158 [5]   | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Diagnostics out (open collector output)                                                                    | Umax = 50VDC, Imax = 20mA, SELV                                                                                               | D158 [6]   | ○                                           | switch: control function: heating (pos.) / cooling (neg.) | D12E [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
| IO2                 | ○ Din2 (active high): digital input                                                                          | active: applied voltage 3.5-50VDC, SELV<br>not active: pin open or applied voltage < 1.5VDC                                   | D159 [0]   | ○                                           | switch: parameter set: #1 / #2                            | D104 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Ain2 0-10V/PWM: analog input                                                                               | RI = 100K, characteristic curve parameterizable, f <sub>PWM</sub> = 1k..10kHz, SELV                                           | D159 [2]   | ○                                           | source: sensor value                                      | D147 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Ain2 4-20mA: analog input                                                                                  | RI = 125R, characteristic curve parameterizable, SELV                                                                         | D159 [3]   | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Din3 (active high): digital input                                                                          | active: applied voltage 3.5-50VDC, SELV<br>not active: pin open or applied voltage < 1.5VDC                                   | D15A [0]   | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
| IO3                 | ○ Din3 (active low): digital input                                                                           | active: applied voltage < 1.5VDC, SELV<br>not active: pin open or applied voltage < 1.5VDC                                    | D15A [1]   | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ PWMIn3: digital input, idle level high                                                                     | PWM = 40Hz - 10kHz, characteristics parameterizable                                                                           | D15A [7]   | ○                                           | switch: control function: heating (pos.) / cooling (neg.) | D12E [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ PWMIn3: digital input, idle level low                                                                      | active: pin open or applied voltage 3.5-50VDC<br>not active: applied voltage < 1.5VDC, SELV                                   | D15A [8]   | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Aout3 0-10V: analog output                                                                                 | active: applied voltage 3.5-50VDC<br>not active: pin open or applied voltage < 1.5VDC, SELV                                   | D15A [4]   | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
| RSA<br>RSB          | ○ Tacho out (pulses), analog output                                                                          | function parameterizable, max. 5mA max output frequency 300Hz, SELV                                                           | D15A [5]   | ○                                           | switch: control function: heating (pos.) / cooling (neg.) | D12E [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Diagnostics out (pulses)                                                                                   | 0-10V max. 5mA max output frequency 300Hz, SELV                                                                               | D15A [6]   | ○                                           | switch: parameter set: #1 / #2                            | D104 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Diagnostics out (pulses)                                                                                   | 0-10V max. 5mA max output frequency 300Hz, SELV                                                                               | D15A [6]   | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ Diagnostics out (pulses)                                                                                   | MODBUS RTU, specification V6.3, SELV                                                                                          | D15A [6]   | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Vout                | ○ voltage output                                                                                             | MODBUS bus connection,                                                                                                        |            | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage | RS485 bus connection,                                                                                                         |            | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Vout                | ○ voltage output                                                                                             | voltage parameterizable 3.3..24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV                 | D16E [...] | ○                                           | switch: set value source                                  | D16C [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |
|                     | ○ alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage | 15..50VDC                                                                                                                     |            | ○                                           | switch: direction of rotation: cw / ccw                   | D148 [...]               | (selected directly via IO mode) | D130 [0] | signal: fan modulation level % | D130 [1] | signal: actual speed | D130 [2] | signal: system modulation level % | D130 [5] | signal: remote control output 0-10V | D130 [1] | ○ | pulse output for auto-addressing | D130 [4] |  |  |  |  |  |  |  |  |  |  |  |  |  |

8300100631


VCH0500CTTRS

## EC centrifugal module - RadiPac

backward-curved, single-intake

with housing

## Curves: Air performance 50 Hz

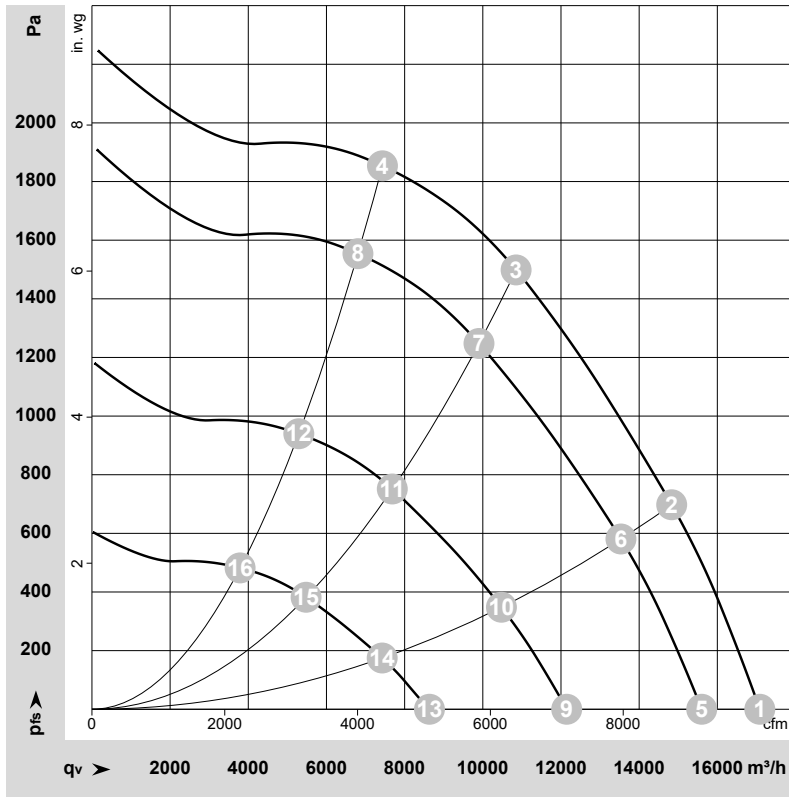

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-223311-1

Date: 2023-01-13

Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | LwA | q <sub>V</sub>    | P <sub>fs</sub> | q <sub>V</sub> | P <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-----|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | dB  | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 3~    | 400 | 50 | 2840              | 3823           | 6.05 | 90                | 98                | 104                | 105 | 17085             | 0               | 10055          | 0.00            |
| 2  | 3~    | 400 | 50 | 2840              | 5261           | 8.16 | 83                | 91                | 100                | 101 | 14830             | 700             | 8730           | 2.81            |
| 3  | 3~    | 400 | 50 | 2840              | 6210           | 9.60 | 78                | 87                | 96                 | 97  | 10850             | 1500            | 6385           | 6.02            |
| 4  | 3~    | 400 | 50 | 2840              | 5904           | 9.10 | 80                | 89                | 96                 | 97  | 7430              | 1850            | 4375           | 7.43            |
| 5  | 3~    | 400 | 50 | 2585              | 2968           | 4.81 | 87                | 95                | 101                | 102 | 15600             | 0               | 9180           | 0.00            |
| 6  | 3~    | 400 | 50 | 2590              | 4040           | 6.36 | 80                | 89                | 97                 | 98  | 13535             | 582             | 7965           | 2.34            |
| 7  | 3~    | 400 | 50 | 2590              | 4734           | 7.38 | 76                | 84                | 93                 | 94  | 9900              | 1249            | 5830           | 5.01            |
| 8  | 3~    | 400 | 50 | 2585              | 4530           | 7.08 | 78                | 86                | 93                 | 94  | 6805              | 1556            | 4005           | 6.25            |
| 9  | 3~    | 400 | 50 | 2010              | 1508           | 2.79 | 79                | 88                | 92                 | 93  | 12145             | 0               | 7150           | 0.00            |
| 10 | 3~    | 400 | 50 | 2010              | 1971           | 3.40 | 74                | 82                | 88                 | 89  | 10475             | 348             | 6165           | 1.40            |
| 11 | 3~    | 400 | 50 | 2010              | 2304           | 3.87 | 70                | 78                | 85                 | 86  | 7685              | 752             | 4525           | 3.02            |
| 12 | 3~    | 400 | 50 | 2010              | 2204           | 3.72 | 71                | 79                | 85                 | 86  | 5290              | 941             | 3115           | 3.78            |
| 13 | 3~    | 400 | 50 | 1440              | 659            | 1.58 | 71                | 80                | 84                 | 85  | 8635              | 0               | 5080           | 0.00            |
| 14 | 3~    | 400 | 50 | 1440              | 825            | 1.85 | 67                | 75                | 80                 | 81  | 7425              | 175             | 4370           | 0.70            |
| 15 | 3~    | 400 | 50 | 1440              | 940            | 2.02 | 61                | 70                | 76                 | 77  | 5480              | 382             | 3225           | 1.53            |
| 16 | 3~    | 400 | 50 | 1440              | 905            | 1.97 | 62                | 70                | 76                 | 77  | 3790              | 483             | 2230           | 1.94            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>V</sub> = Air flow · P<sub>fs</sub> = Pressure increase