

8300100798
VMA0400CTPFS

EC axial panel fan - AxiEco

with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100798	
Motor	E09004-28	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2250
Power consumption	W	950
Current draw	A	1.5
Max. back pressure	Pa	440
Max. back pressure	in. wg	1.77
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	46	33.5	09 Power consumption P_{ed}	kW	0.92
02 Measurement category		A		09 Air flow q_v	m³/h	4595
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	308
04 Efficiency grade N		52.5	40	10 Speed (rpm) n	min ⁻¹	2255
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-233528

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100798
VMA0400CTPFS


EC axial panel fan - AxiEco

with guard grille

Technical description

Size	400 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed)
Technical features	- Locked-rotor detection - Speed control - Alarm relay - Power limiter - Motor current limitation - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1

Product drawing

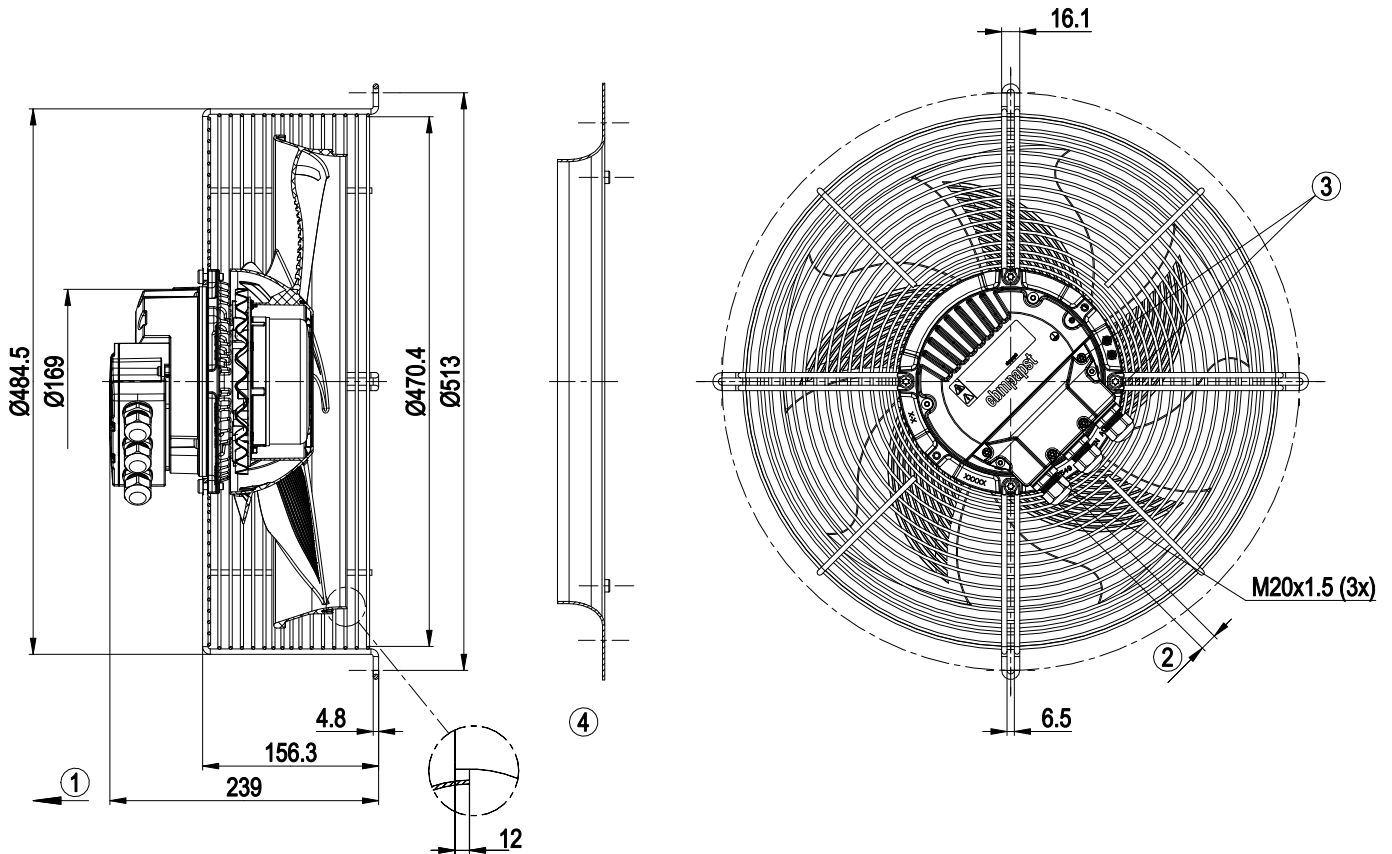


1	Airflow direction "V"
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 2 ± 0.3 Nm
4	Accessory part: Inlet ring 40100-2-4013 not included in scope of delivery

8300100798
VMA0400CTPFS

EC axial panel fan - AxiEco

with guard grille

Accessory part

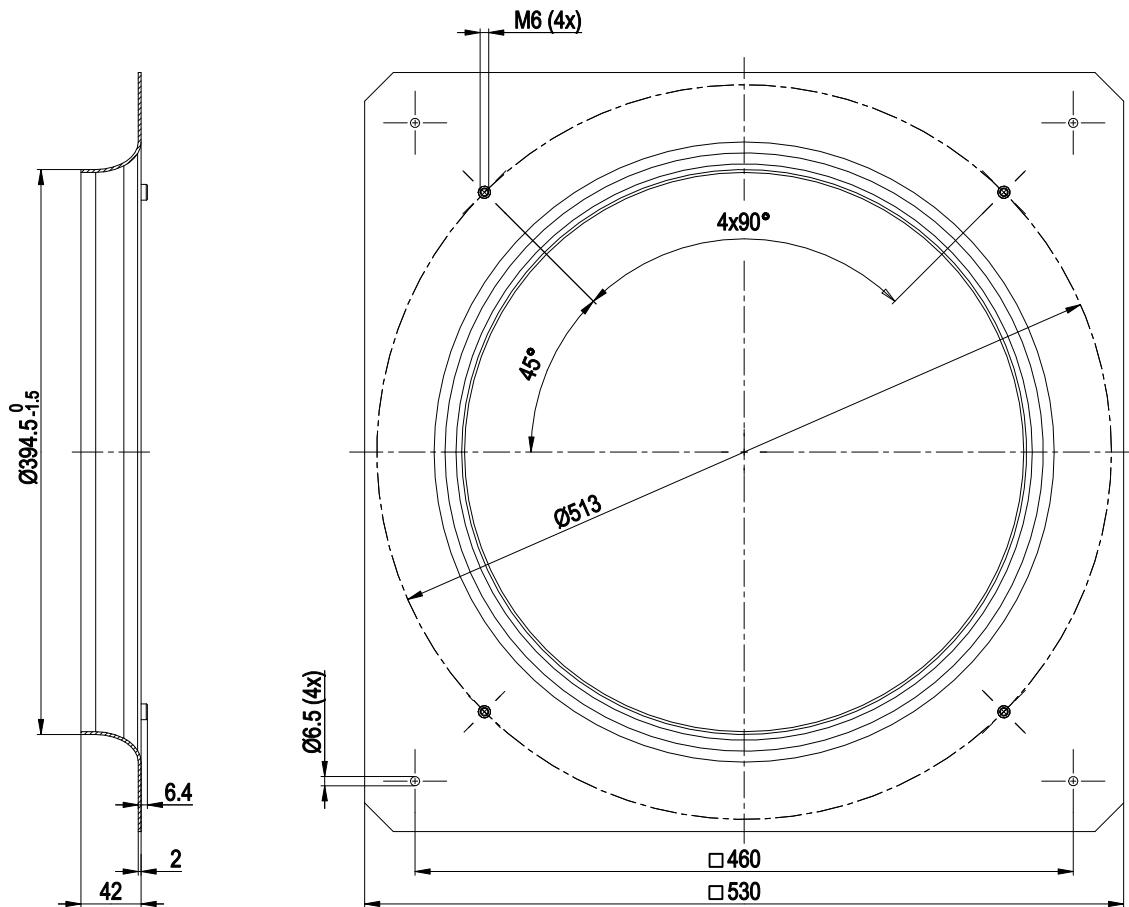


Inlet ring 40100-2-4013

EC axial panel fan - AxiEco

with guard grille

Connection diagram

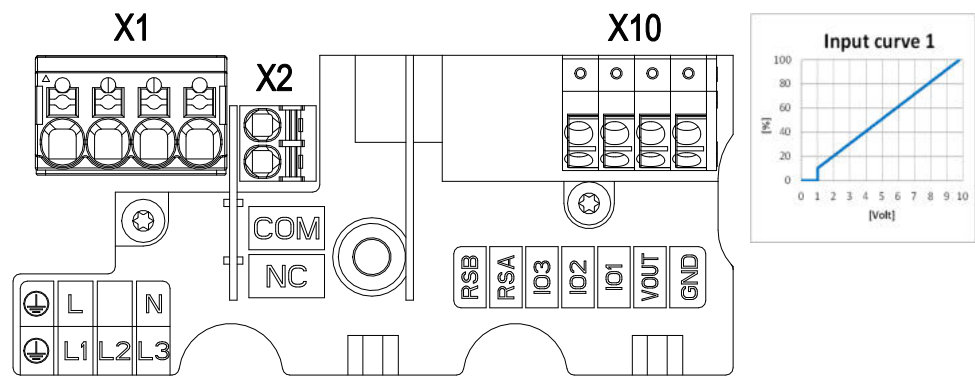

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L1, L2, L3	Power supply, phase, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

EC axial panel fan - AxiEco

with guard grille

Terminal/plug assignment

Basic (B5)
Factory configuration option upon request


Factory configuration option

	configurable IO mode		electrical specification		INPUT						OUTPUT					
					source: set value	switch: parameter set: #1 / #2	switch: direction of rotation: cw / ccw	switch: enable/disable input	configurable function	signal: tach out	signal: diagnostics out	signal: alarm out	signal: run monitoring	signal: status	signal: configurable function	
IO1	Din1 (high active): digital input		active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV													
	Ain1 0-10 V/PWM: analog input		Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV													
IO2	Tach out (open collector)		Umax=50 VDC, Imax=10 mA, SELV													
	Diagnostics out (open collector)		Umax=50 VDC, Imax=10 mA, SELV													
	Alarm out (open collector)		Umax=50 VDC, Imax=10 mA, SELV													
	Open collector		Umax=50 VDC, Imax=10 mA, SELV													
COM	Relais		250 VAC / 2 A (AC1)													
NC																
Vout	Voltage output		Voltage 10 VDC, SELV													

EC axial panel fan - AxiEco

with guard grille

Curves: Air performance 50 Hz

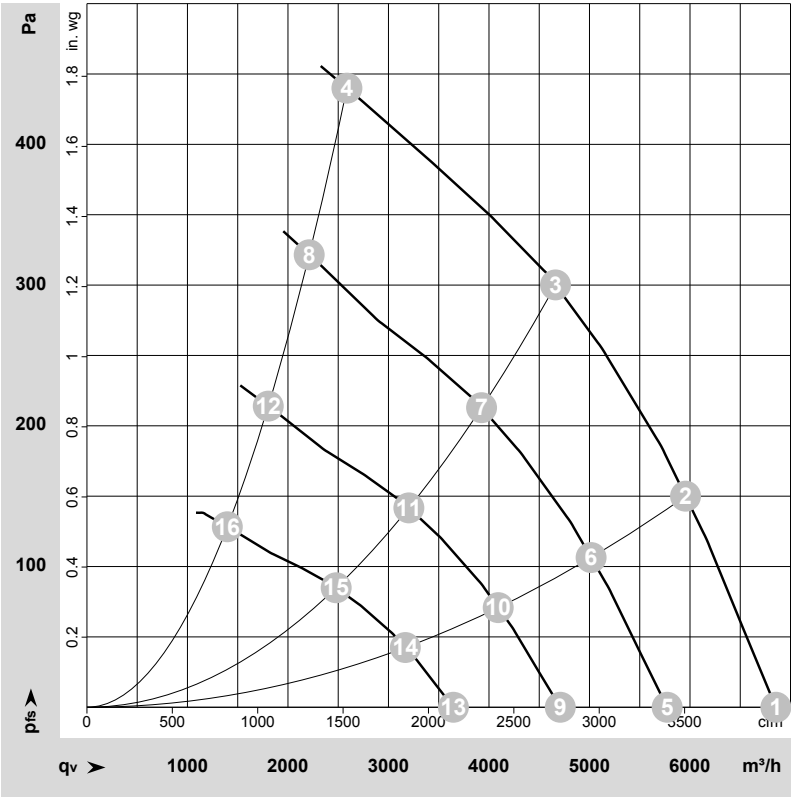

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-233528-1
Date: 2024-07-23
Nozzle: 40100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	2255	657	1.04	74	80	85	86	6855	0	4035	0.00
2	3~	400	50	2255	806	1.26	71	77	82	83	5955	150	3505	0.60
3	3~	400	50	2255	923	1.43	69	76	81	82	4660	300	2745	1.20
4	3~	400	50	2225	950	1.47	75	82	87	88	2585	440	1525	1.77
5	3~	400	50	1900	393	0.62	69	76	81	82	5775	0	3400	0.00
6	3~	400	50	1900	481	0.75	66	73	77	79	5015	106	2950	0.43
7	3~	400	50	1900	552	0.86	64	71	77	78	3925	213	2310	0.86
8	3~	400	50	1900	594	0.92	71	78	83	84	2210	322	1300	1.29
9	3~	400	50	1550	213	0.34	64	71	75	77	4710	0	2770	0.00
10	3~	400	50	1550	261	0.41	61	68	72	73	4090	71	2410	0.29
11	3~	400	50	1550	299	0.46	59	66	72	73	3205	142	1885	0.57
12	3~	400	50	1550	322	0.50	66	73	78	79	1805	214	1060	0.86
13	3~	400	50	1200	99	0.16	58	64	69	70	3645	0	2145	0.00
14	3~	400	50	1200	121	0.19	55	62	66	67	3170	42	1865	0.17
15	3~	400	50	1200	139	0.22	53	60	65	66	2480	85	1460	0.34
16	3~	400	50	1200	150	0.23	59	66	71	72	1395	128	820	0.51

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase