

8300100800  
VMA0450CSPFS

# EC axial panel fan - AxiEco

with guard grille

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

|                          |                   |            |
|--------------------------|-------------------|------------|
| Item                     | 8300100800        |            |
| Motor                    | E09001-28         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Status                   |                   | prelim.    |
| Speed (rpm)              | min <sup>-1</sup> | 1300       |
| Power consumption        | W                 | 400        |
| Current draw             | A                 | 2.5        |
| Max. back pressure       | Pa                | 180        |
| Max. back pressure       | in. wg            | 0.72       |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment  
Subject to change

**Data according to Commission Regulation (EU) 327/2011 (prEN 17166)**

|                                   |   | Actual | Req. 2015 |                               |                   |      |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 42.9   | 31.1      | 09 Power consumption $P_{ed}$ | kW                | 0.39 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 4070 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 134  |
| 04 Efficiency grade N             |   | 51.8   | 40        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1305 |
| 05 Variable speed drive           |   | Yes    |           | 11 Specific ratio*            |                   | 1.00 |

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_g / 100\,000\text{ Pa}$

LU-223833

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100800  
VMA0450CSPFS


# EC axial panel fan - AxiEco

with guard grille

## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size                                                                       | 450 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Motor size                                                                 | 90                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Terminal box material                                                      | PA plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Electronics housing material                                               | Die-cast aluminum, painted gray                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Guard grille material                                                      | Steel, coated with black plastic (RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Moisture (F) / Environmental (H) protection class                          | H2                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                      |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motor bearing                                                              | Ball bearing; (sealed)                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Technical features                                                         | <ul style="list-style-type: none"><li>- Locked-rotor detection</li><li>- Speed control</li><li>- Alarm relay</li><li>- Power limiter</li><li>- Motor current limitation</li><li>- PFC, passive</li><li>- Soft start</li><li>- Control interface with SELV potential safely disconnected from the mains</li><li>- Temperature derating</li><li>- Thermal overload protection for electronics/motor</li><li>- Line undervoltage / phase failure detection</li></ul> |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Protection class assignment                                                | I; If a protective earth is connected.<br>The built-in component has several local protection class assignments.<br>The final protection class is determined by the intended installation.                                                                                                                                                                                                                                                                        |
| Conformity with standards                                                  | EN 60335-1; EN 61800-5-1; CE; UKCA                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Approval                                                                   | CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1                                                                                                                                                                                                                                                                                                                                                                                                          |

## Product drawing

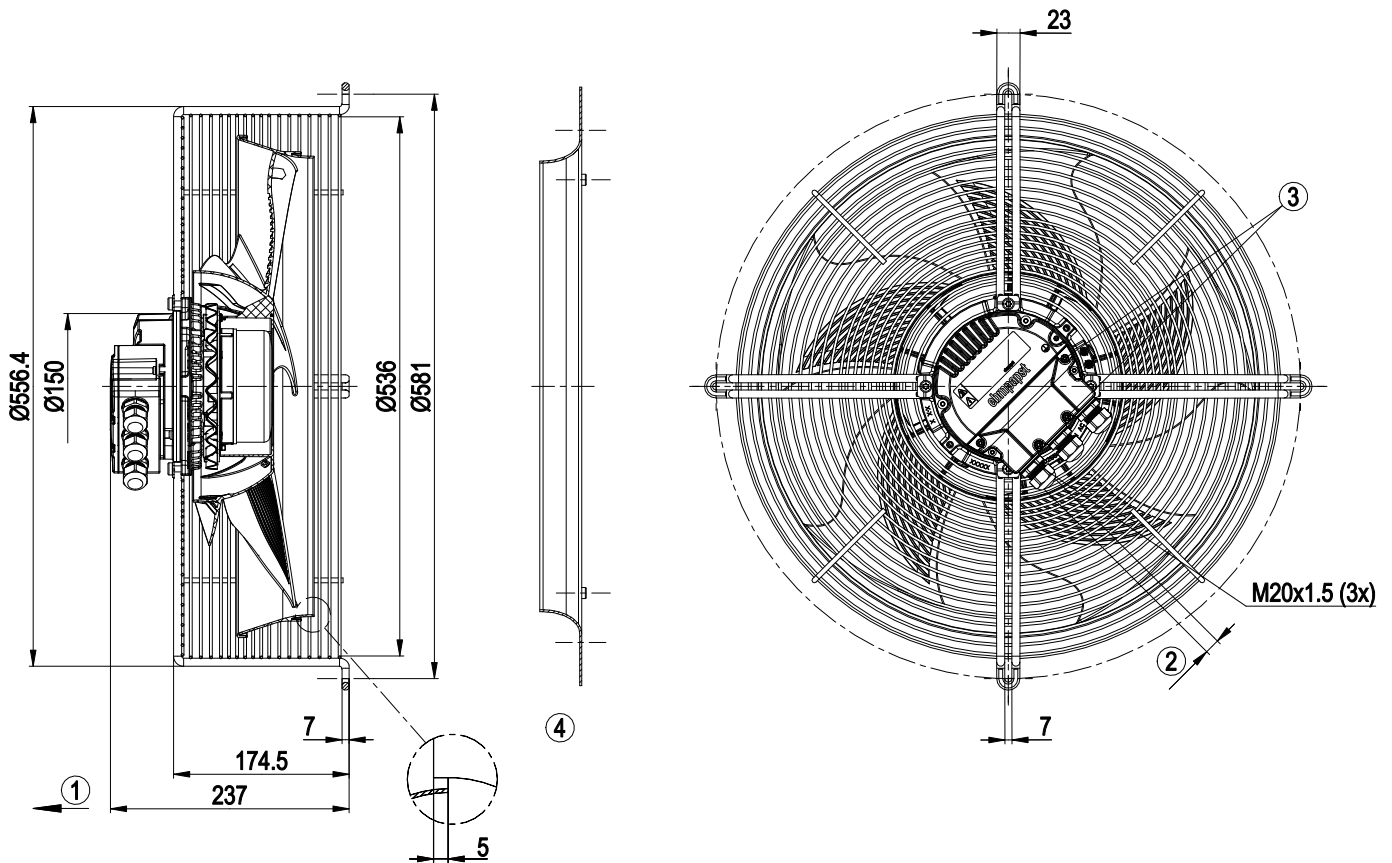


|   |                                                                                                                                                                                                                   |
|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Airflow direction "V"                                                                                                                                                                                             |
| 2 | Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm<br>(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted) |
| 3 | Tightening torque $2 \pm 0.3$ Nm                                                                                                                                                                                  |
| 4 | Accessory part: Inlet ring 45100-2-4013 not included in scope of delivery.                                                                                                                                        |

8300100800  
VMA0450CSPFS

# EC axial panel fan - AxiEco

with guard grille

## Accessory part

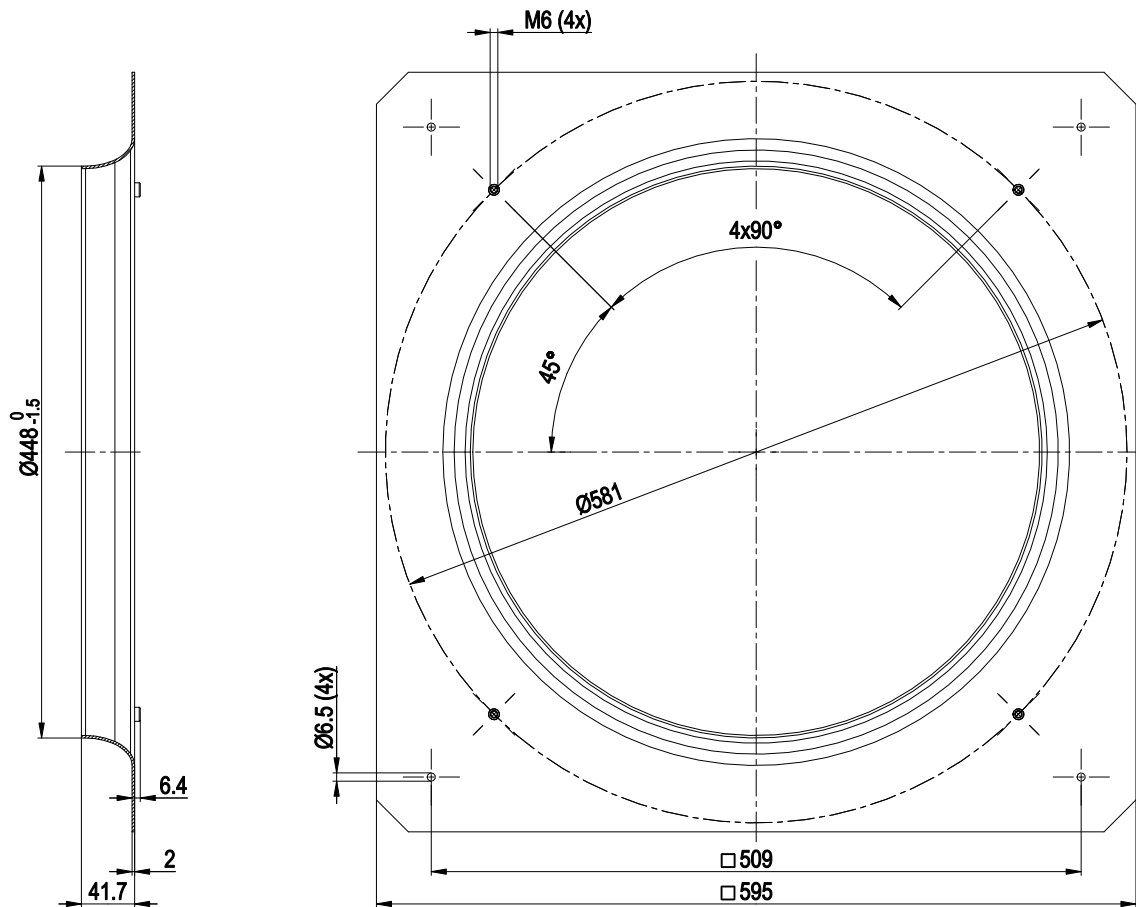


Inlet ring 45100-2-4013

# EC axial panel fan - AxiEco

with guard grille

## Connection diagram

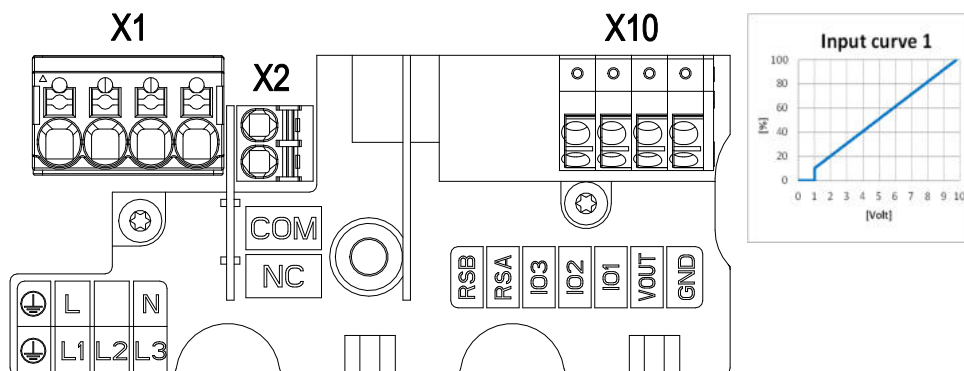

| No. | Conn. | Designation | Function/assignment                                                                                                                                                                                                                                                           |
|-----|-------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X1  | PWR   | PE          | Protective earth                                                                                                                                                                                                                                                              |
| X1  | PWR   | L           | Power supply, phase, see nameplate for voltage range                                                                                                                                                                                                                          |
| X1  | PWR   | N           | Power supply, neutral conductor, see nameplate for voltage range                                                                                                                                                                                                              |
| X2  | CTRL  | COM         | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side                                                                                                 |
| X2  | CTRL  | NC          | Status relay, floating status contact, break for failure                                                                                                                                                                                                                      |
| X10 | CTRL  | GND         | Reference ground for control interface, SELV                                                                                                                                                                                                                                  |
| X10 | CTRL  | Vout        | Voltage output 10 VDC +/-3%, I <sub>max</sub> =10 mA<br>Short-circuit-proof, power supply for external devices, SELV                                                                                                                                                          |
| X10 | CTRL  | IO1         | Factory setting:<br>Analog input 0-10 V / PWM, R <sub>i</sub> =100 kΩ, function: set value<br>Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV<br>Function parameterizable at the factory (see table Optional interface functions) |
| X10 | CTRL  | IO2         | Factory setting:<br>Open collector output, U <sub>max</sub> =50 VDC, I <sub>max</sub> =20 mA, function:Tacho output<br>1 pulse/revolution, SELV<br>Function parameterizable at factory (see table Optional interface functions)                                               |

VMA0450CSPFS

with guard grille


[illegible]

### Factory configuration option upon request

## electrical specification

|        |                                                                                       |                                                                                                             |
|--------|---------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| IO1    | <ul style="list-style-type: none"> <li>◦ Din1 (high active): digital input</li> </ul> | active: parameterizable voltage x - 30 VDC<br>not active: pin open or parameterizable voltage < x VDC, SELV |
|        | ◦ Ain1 0-10 V/PWM: analog input                                                       | Rt = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$ , SELV            |
|        | ◦ Tach out (open collector)                                                           | Umax = 50 VDC, Imax = 20 mA, SELV                                                                           |
|        | ◦ Diagnostics out (open collector)                                                    | Umax = 50 VDC, Imax = 20 mA, SELV                                                                           |
| IO2    | ◦ Alarm out (open collector)                                                          | Umax = 50 VDC, Imax = 20 mA, SELV                                                                           |
|        | ◦ Open collector                                                                      | Umax = 50 VDC, Imax = 20 mA, SELV                                                                           |
| COM NC | Relais                                                                                | 250 VAC / 2 A (AC1)                                                                                         |
| Vout   | Voltage output                                                                        | Voltage 10 VDC, SELV                                                                                        |

## Curves: Air performance 50 Hz

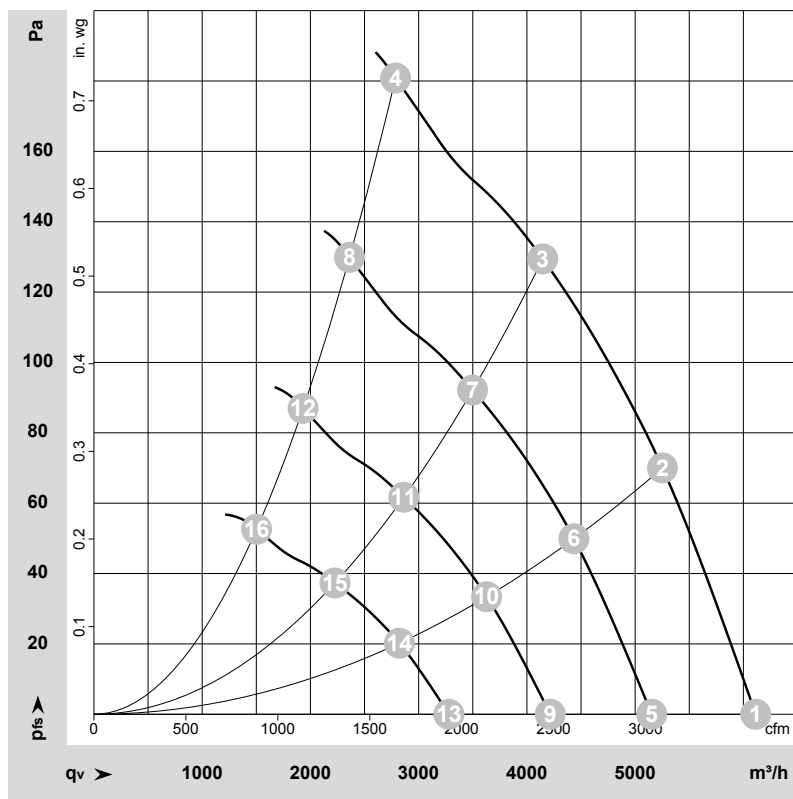

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-223833-1  
Date: 2022-11-29  
Nozzle: 45100-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | LwA | q <sub>v</sub> | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-----|----------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | dB  | m³/h           | Pa              | cfm            | in. wg          |
| 1  | 1~    | 230 | 50 | 1300              | 283            | 1.79 | 66                | 72                | 76                 | 77  | 6115           | 0               | 3600           | 0.00            |
| 2  | 1~    | 230 | 50 | 1300              | 348            | 2.17 | 61                | 68                | 72                 | 73  | 5250           | 70              | 3090           | 0.28            |
| 3  | 1~    | 230 | 50 | 1300              | 389            | 2.41 | 60                | 67                | 72                 | 73  | 4145           | 130             | 2440           | 0.52            |
| 4  | 1~    | 230 | 50 | 1300              | 400            | 2.50 | 64                | 71                | 77                 | 78  | 2785           | 180             | 1640           | 0.72            |
| 5  | 1~    | 230 | 50 | 1100              | 169            | 1.07 | 61                | 68                | 71                 | 73  | 5155           | 0               | 3035           | 0.00            |
| 6  | 1~    | 230 | 50 | 1100              | 209            | 1.30 | 57                | 64                | 68                 | 69  | 4435           | 50              | 2610           | 0.20            |
| 7  | 1~    | 230 | 50 | 1100              | 234            | 1.45 | 56                | 63                | 68                 | 69  | 3500           | 92              | 2060           | 0.37            |
| 8  | 1~    | 230 | 50 | 1100              | 246            | 1.52 | 60                | 67                | 73                 | 74  | 2360           | 130             | 1390           | 0.52            |
| 9  | 1~    | 230 | 50 | 900               | 93             | 0.59 | 56                | 63                | 66                 | 68  | 4215           | 0               | 2480           | 0.00            |
| 10 | 1~    | 230 | 50 | 900               | 115            | 0.71 | 52                | 59                | 63                 | 64  | 3630           | 34              | 2135           | 0.14            |
| 11 | 1~    | 230 | 50 | 900               | 128            | 0.79 | 51                | 58                | 63                 | 64  | 2865           | 62              | 1685           | 0.25            |
| 12 | 1~    | 230 | 50 | 900               | 135            | 0.83 | 55                | 62                | 68                 | 69  | 1930           | 87              | 1135           | 0.35            |
| 13 | 1~    | 230 | 50 | 700               | 44             | 0.28 | 50                | 57                | 60                 | 62  | 3280           | 0               | 1930           | 0.00            |
| 14 | 1~    | 230 | 50 | 700               | 54             | 0.34 | 46                | 53                | 56                 | 58  | 2820           | 20              | 1660           | 0.08            |
| 15 | 1~    | 230 | 50 | 700               | 60             | 0.37 | 44                | 52                | 56                 | 58  | 2225           | 37              | 1310           | 0.15            |
| 16 | 1~    | 230 | 50 | 700               | 63             | 0.39 | 48                | 56                | 62                 | 63  | 1505           | 53              | 885            | 0.21            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase