

8300100805
VWT0500CSPFS

EC axial panel fan - AxiEco

Fan housing with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100805	
Motor	E09002-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1070
Power consumption	W	350
Current draw	A	1.55
Max. back pressure	Pa	140
Max. back pressure	in. wg	0.56
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	51.2	30.6	09 Power consumption P_{ed}	kW	0.32
02 Measurement category		A		09 Air flow q_v	m ³ /h	4640
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	117
04 Efficiency grade N		60.6	40	10 Speed (rpm) n	min ⁻¹	1070
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-223970

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100805
VWT0500CSPFS

EC axial panel fan - AxiEco

Fan housing with guard grille

Technical description


Size	500 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum, painted gray
Impeller material	PP plastic
Fan housing material	PP plastic
Inlet ring material	ABS plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H2
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing; (sealed, without air gap)
Technical features	<ul style="list-style-type: none">- Locked-rotor detection- Speed control- Alarm relay- Power limiter- Motor current limitation- PFC, active- Soft start- Control interface with SELV potential safely disconnected from the mains- Temperature derating- Thermal overload protection for electronics/motor- Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300100805
VWT0500CSPFS

EC axial panel fan - AxiEco

Fan housing with guard grille

Product drawing

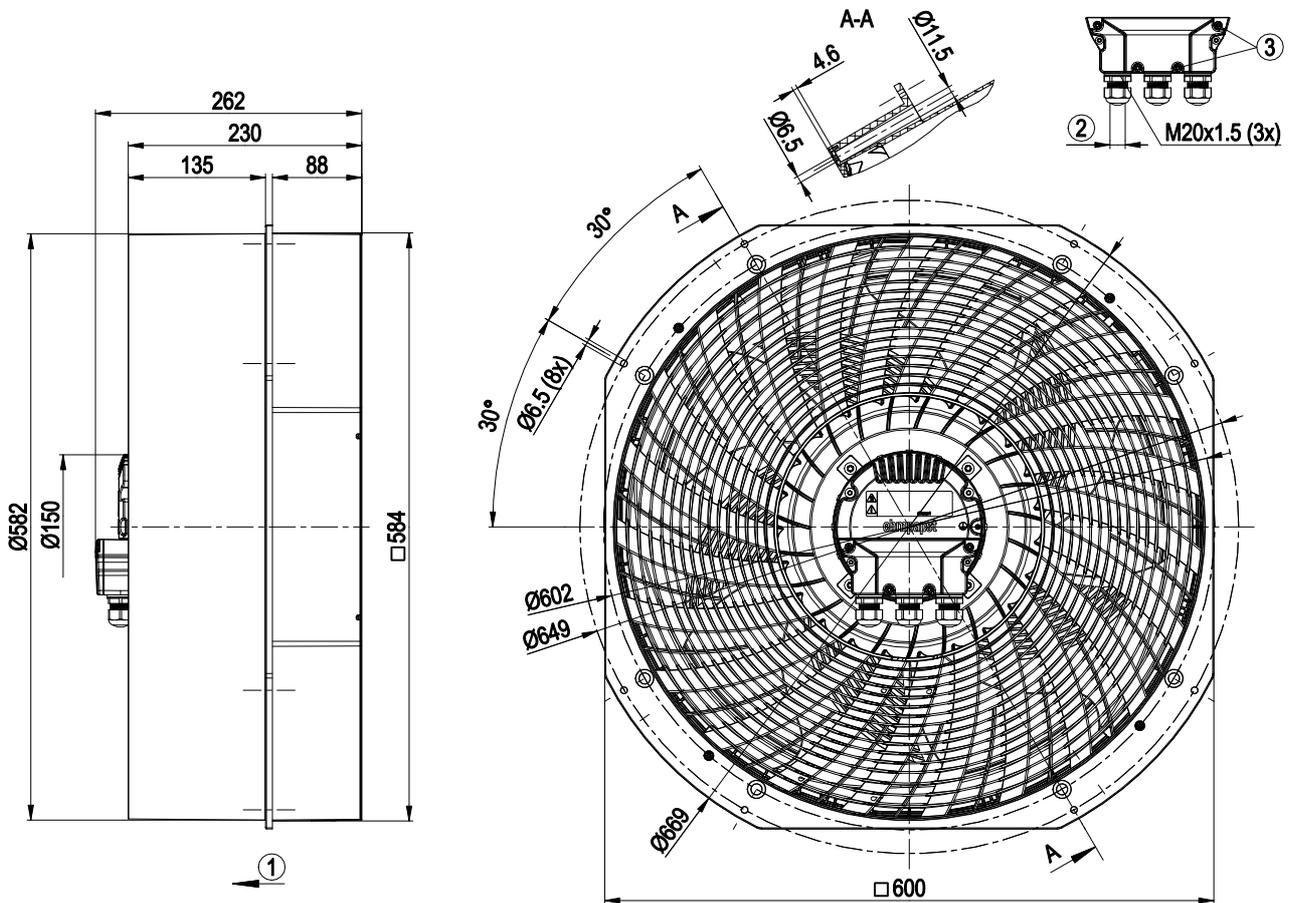


1	Airflow direction "V"
2	Cable diameter min. 6 mm, max. 10 mm, tightening torque 2.5 ± 0.4 Nm Cable diameter min. 4 mm, max. 7 mm, tightening torque 2.5 ± 0.4 Nm (included seal must be used) (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 2 ± 0.3 Nm Accessory part: Guard grill 50070-2-4039 with oval head screw 60080-7-6201 (4x), can be fitted on the intake side. Not included in scope of delivery. The installation of accessories may change the air performance and noise values.

8300100805
VWT0500CSPFS

EC axial panel fan - AxiEco


Fan housing with guard grille

Accessory part

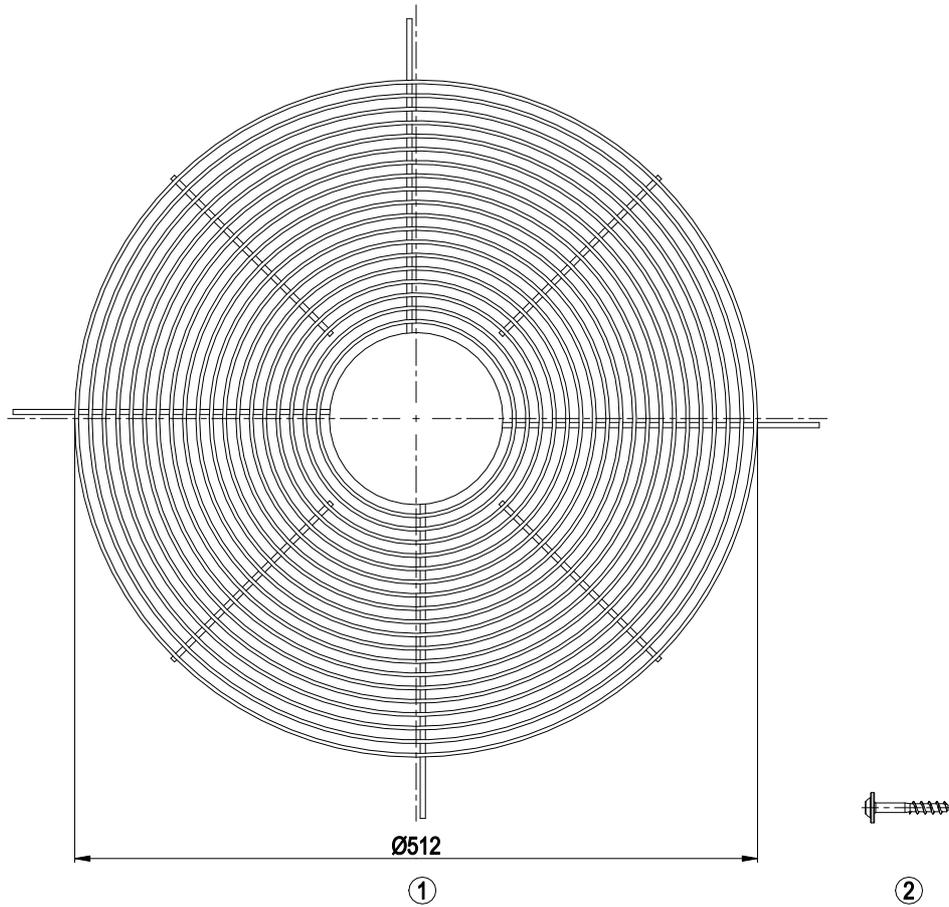

1	Guard grill 50070-2-4039
2	Oval head screw 60080-7-6201 (4x)

Mounting dimensions

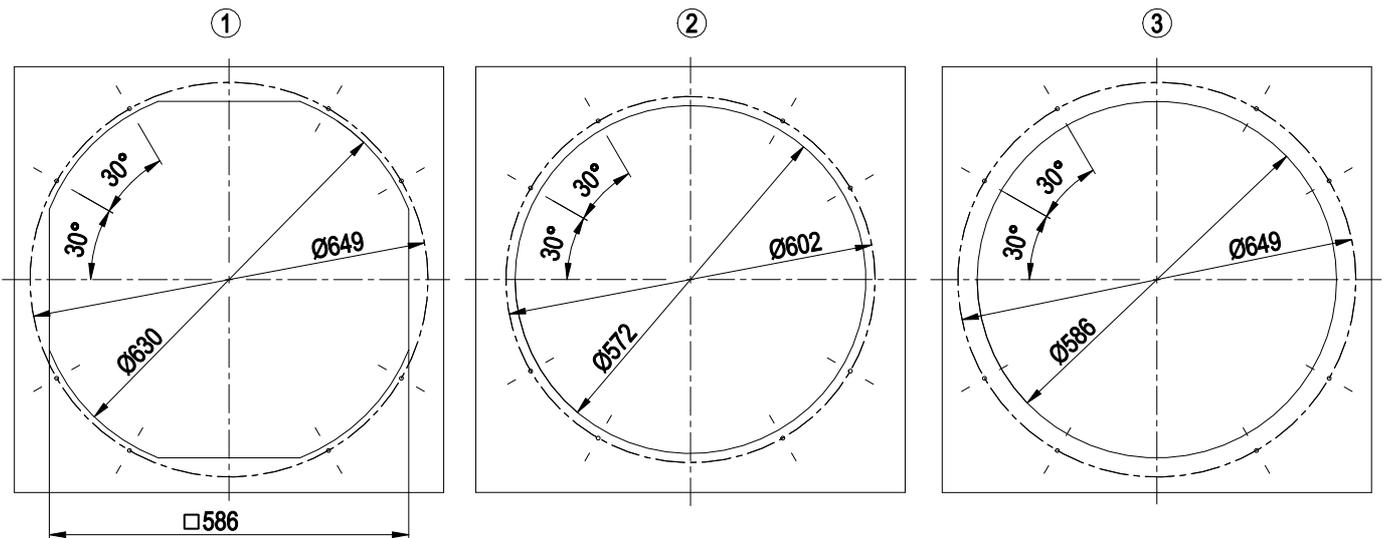


	All 8 holes on the relevant pitch circle must always be used for all types of fastening.
1	intake-side mounting on flange
2	intake-side mounting on suction nozzle
	The Ø6.5 mm holes must be pierced from the underside with a mandrel or similar tool.
	We recommend using M6 cheese-head screws with hexagon socket (DIN 912/DIN EN ISO 4762) for fastening.
3	outlet-side mounting on flange

EC axial panel fan - AxiEco

Fan housing with guard grille

Connection diagram

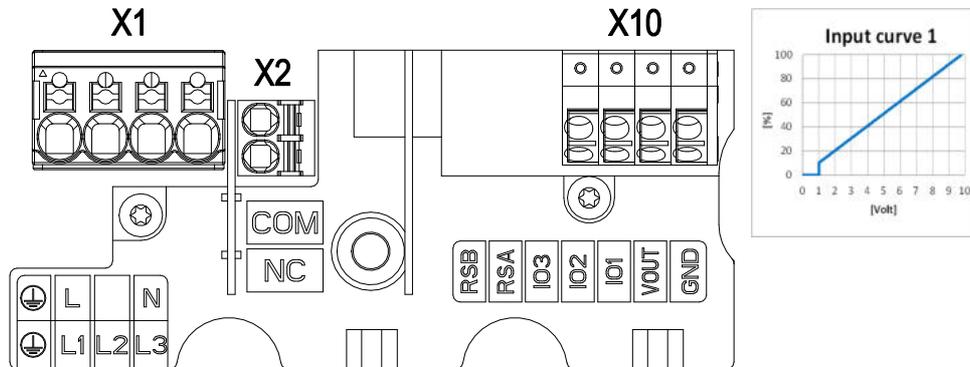

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L	Power supply, phase, see nameplate for voltage range
X1	PWR	N	Power supply, neutral conductor, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

Terminal/plug assignment


	configurable IO mode	electrical specification	INPUT	OUTPUT	
I01	<ul style="list-style-type: none"> Din1 (high active): digital input Ain1 0-10 V/PWM: analog input 	active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$, SELV	<input type="checkbox"/> source: set value <input type="checkbox"/> switch: parameter set: #1 / #2 <input type="checkbox"/> switch: direction of rotation: cw / ccw <input type="checkbox"/> switch: enable/disable input <input type="checkbox"/> configurable function	<input type="checkbox"/> signal: tach out <input type="checkbox"/> signal: diagnostics out <input type="checkbox"/> signal: alarm out <input type="checkbox"/> signal: run monitoring <input type="checkbox"/> signal: status <input type="checkbox"/> signal: configurable function	
I02	<ul style="list-style-type: none"> Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector 	Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV			
COM NC	Relais	250 VAC / 2 A (AC1)			
Vout	Voltage output	Voltage 10 VDC, SELV			

Basic (B5)

Factory configuration option upon request

o factory configuration option

Curves: Air performance 50 Hz

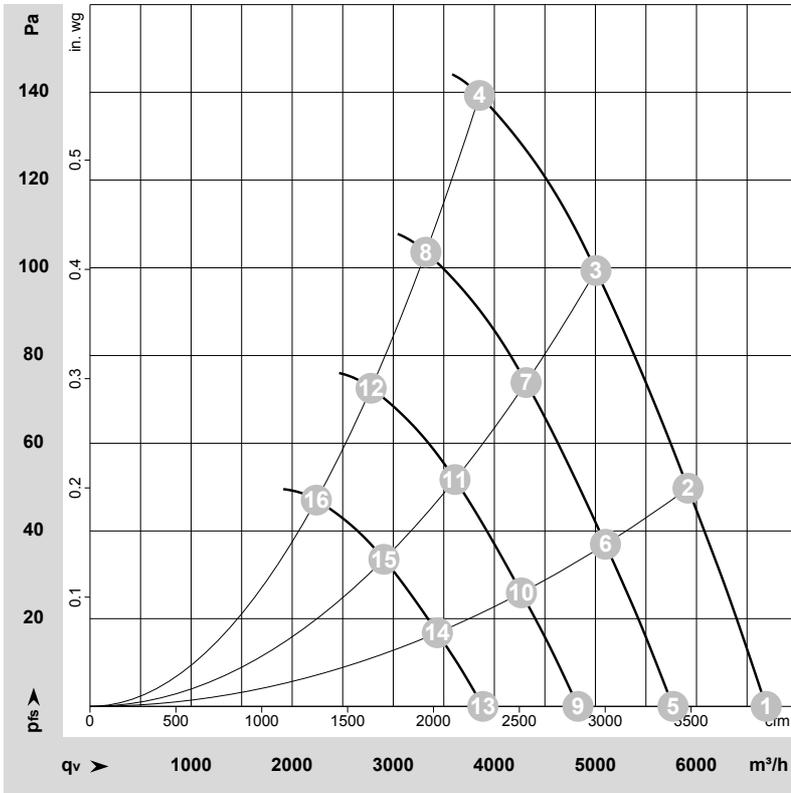

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-223970-1
Date: 2023-01-12
Housing: 50031-2-2910
Nozzle: 50000-2-2943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1070	261	1.19	66	72	73	75	6690	0	3935	0.00
2	1~	230	50	1070	297	1.34	64	70	71	74	5915	50	3480	0.20
3	1~	230	50	1070	322	1.45	62	69	71	73	5005	100	2945	0.40
4	1~	230	50	1070	350	1.55	63	70	71	74	3855	140	2270	0.56
5	1~	230	50	920	167	0.76	62	68	69	72	5770	0	3395	0.00
6	1~	230	50	920	190	0.86	60	67	68	70	5100	37	3000	0.15
7	1~	230	50	920	206	0.93	59	65	67	69	4315	74	2540	0.30
8	1~	230	50	920	219	0.98	59	66	68	70	3320	104	1955	0.42
9	1~	230	50	770	98	0.45	58	64	64	67	4825	0	2840	0.00
10	1~	230	50	770	111	0.50	56	62	63	66	4270	26	2510	0.10
11	1~	230	50	770	121	0.55	54	61	62	65	3610	52	2125	0.21
12	1~	230	50	770	128	0.58	55	62	63	65	2780	73	1635	0.29
13	1~	230	50	620	51	0.23	52	58	59	62	3885	0	2290	0.00
14	1~	230	50	620	58	0.26	50	57	58	60	3435	17	2025	0.07
15	1~	230	50	620	63	0.29	49	56	57	59	2905	34	1710	0.14
16	1~	230	50	620	67	0.30	49	56	58	60	2240	47	1320	0.19

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase