

8300100910
VBS0500CSPLS

EC centrifugal fan - RadiPac

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300100910	
Motor	E09001-55	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1110
Power consumption	W	400
Current draw	A	2.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	71.4	47.3	09 Power consumption P_{ed}	kW	0.4
02 Measurement category		A		09 Air flow q_v	m³/h	4255
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	218
04 Efficiency grade N		86.1	62	10 Speed (rpm) n	min ⁻¹	1105
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$


LU-224219

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description


Weight	8.8 kg
Size	500 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1 = Moist – occasional or constantly high level of humidity
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display with LED - Locked-rotor detection - Speed control - External 15-30 VDC input (parameterization) - Alarm relay - Configurable inputs/outputs (I/O) - Power limiter - MODBUS - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - Control interface with SELV potential safely disconnected from the mains - Temperature derating - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Power Factor Correction (PFC)	Passive
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

Product drawing

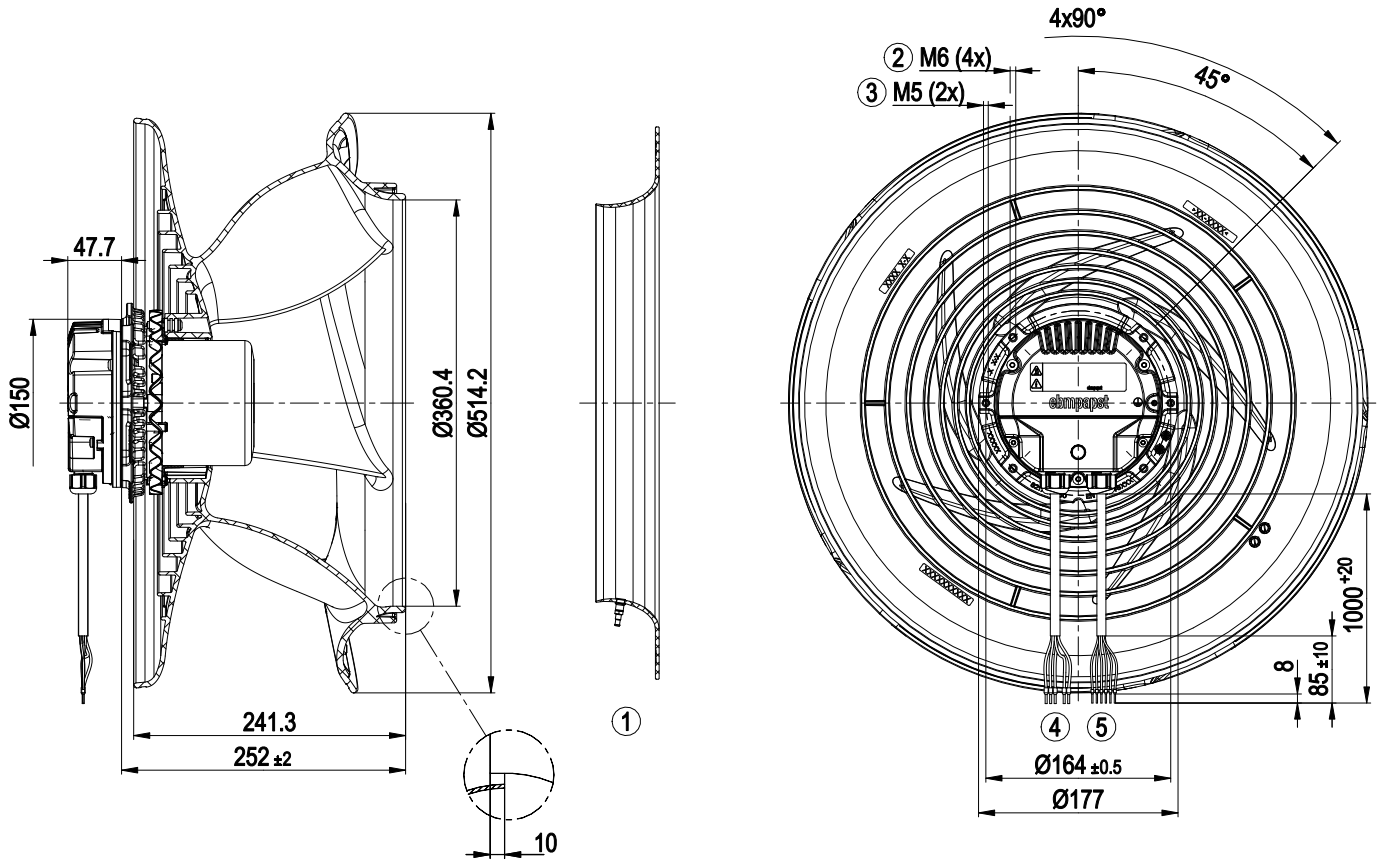

1	Accessory part: Inlet ring 8217102238 with pressure tap (k-factor: 290) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Supply line (PWR) PVC AWG18 5x wire-end ferrule
5	Control wire (CTRL) PVC AWG22 6x wire-end ferrule

Accessory part

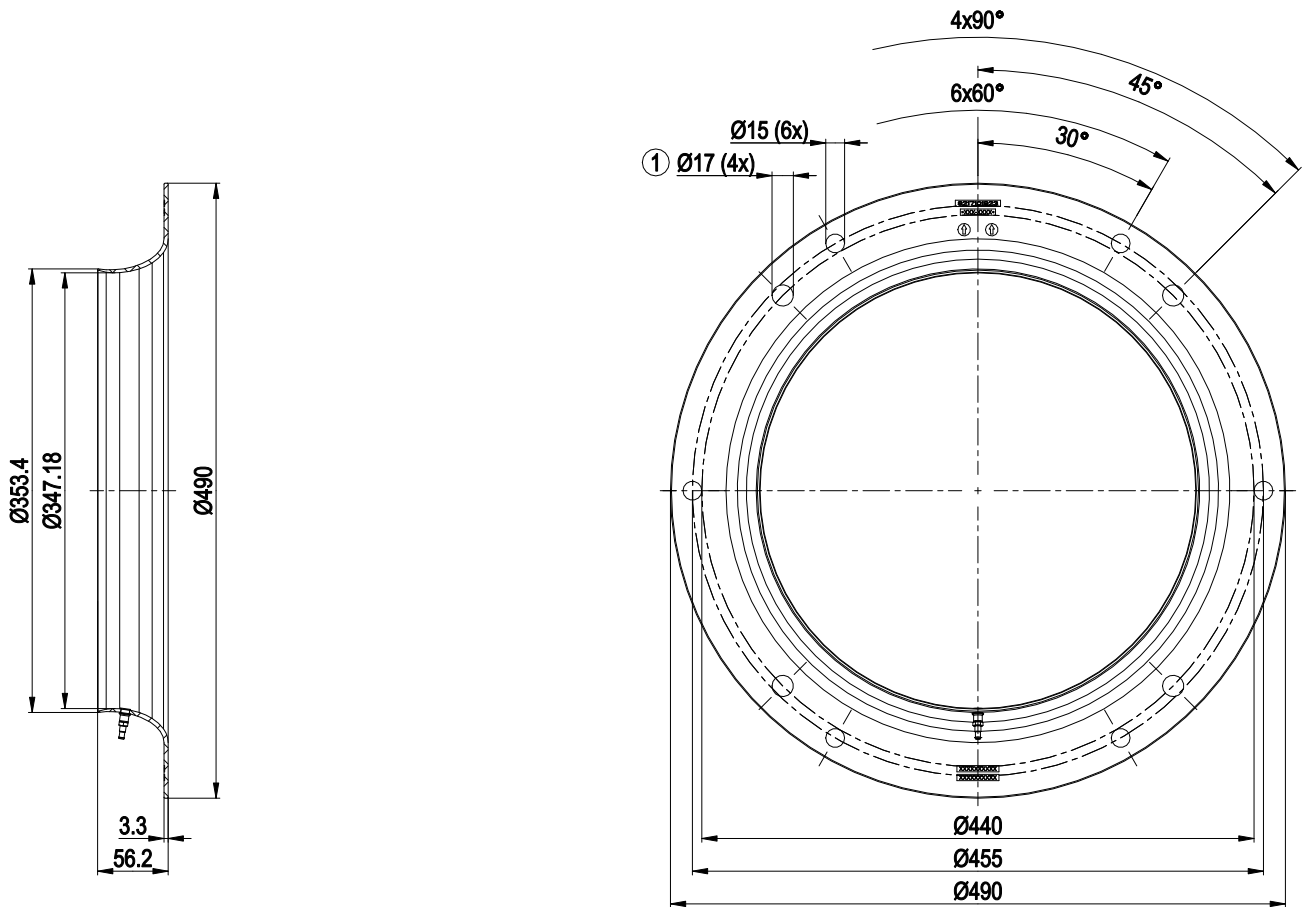


Inlet ring 8217102238 with pressure tap (k-factor: 290)

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
|---|--|

EC centrifugal fan - RadiPac

backward-curved, single-intake

Connection diagram




No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

Terminal/plug assignment

Medium (M2)		Functions and parameter description MODBUS V7.1		configurable IO mode		electrical specification		MODBUS Register for IO mode configuration		configurable IO functions: normal / inverse													
IO1	Dim1 (high active); digital input							D158 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV														
IO2	Ain1 0-10 V/PWM: analog input							D158 [1]	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV														
	Ain1 0-10 V/PWM (with pull up): analog input							D158 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV														
	Dim1 (active high); digital input							D158 [9]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV														
	Ain1 0-10 V/PWM: analog input							D159 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV														
	Tach out (open collector)							D159 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1\text{ k} - 10\text{ kHz}$, SELV														
	Diagnostics out (open collector)							D159 [5]	Umax = 50 VDC, Imax = 20 mA, SELV														
	Alarm out (open collector)							D159 [6]	Umax = 50 VDC, Imax = 20 mA, SELV														
	Autodressing pulse output (open collector)							D159 [10]	Umax = 50 VDC, Imax = 20 mA, SELV														
	DCI-output (open collector)							D159 [11]	Umax = 50 VDC, Imax = 20 mA, SELV														
RSA	RSB	COM	NC	Relay					MODBUS RTU, parameter specification V7.1, SELV														
Vout									250 VAC / 2 A (AC1)														
									Voltage 10 VDC, SELV														
									15 - 30 VDC														

○ configurable function
○ function to be activated via IO Mode

Curves: Air performance 50 Hz

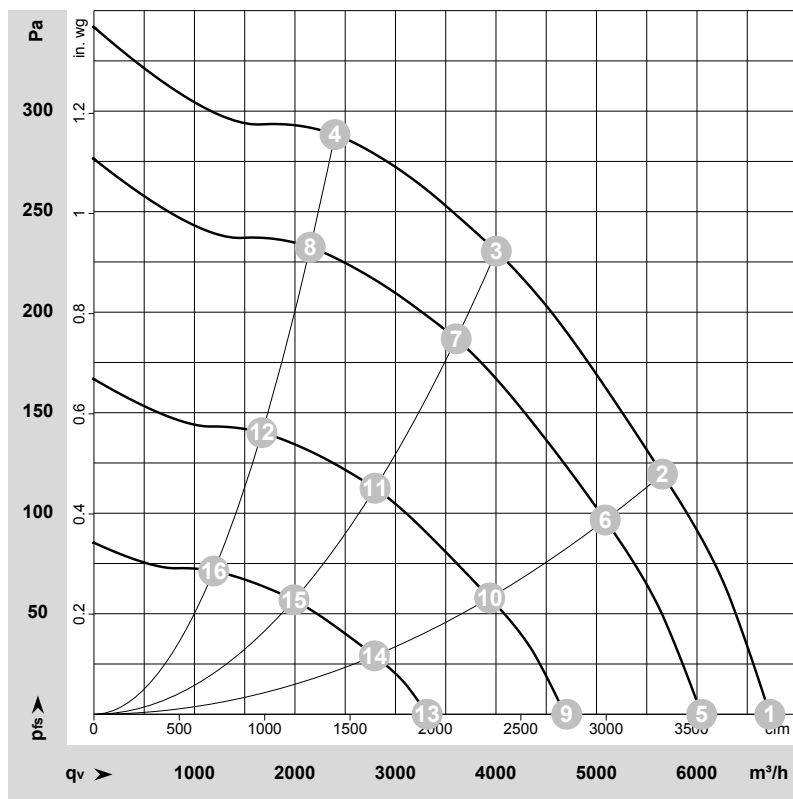

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-224219-1
Date: 2022-11-30
Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _V	P _{fs}	q _V	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	1110	269	1.71	67	74	78	80	6725	0	3960	0.00
2	1~	230	50	1110	353	2.20	61	69	73	74	5655	120	3330	0.48
3	1~	230	50	1110	400	2.50	55	62	67	68	4005	230	2355	0.92
4	1~	230	50	1110	367	2.28	56	63	68	69	2400	290	1410	1.16
5	1~	230	50	995	197	1.29	64	72	76	77	6045	0	3560	0.00
6	1~	230	50	995	258	1.65	58	66	70	72	5085	97	2995	0.39
7	1~	230	50	995	294	1.86	53	60	64	66	3605	187	2120	0.75
8	1~	230	50	995	266	1.70	54	60	65	66	2150	233	1265	0.94
9	1~	230	50	775	98	0.69	60	67	71	73	4705	0	2770	0.00
10	1~	230	50	775	125	0.85	54	61	65	67	3935	58	2315	0.23
11	1~	230	50	775	141	0.96	47	54	59	60	2795	113	1645	0.45
12	1~	230	50	775	129	0.88	47	54	58	60	1670	140	985	0.56
13	1~	230	50	555	41	0.32	50	58	65	65	3315	0	1950	0.00
14	1~	230	50	555	50	0.38	43	51	58	59	2790	29	1640	0.12
15	1~	230	50	555	56	0.42	39	46	53	54	1990	57	1170	0.23
16	1~	230	50	555	52	0.39	38	45	50	51	1190	71	700	0.29

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_V = Air flow · P_{fs} = Pressure increase