

8300100924  
VBH0500CSPFS

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Item	8300100924	
Motor	E09001-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1050
Power consumption	W	370
Current draw	A	2.3
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	66.5	46.9	09 Power consumption $P_{ed}$	kW	0.36
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	4055
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	196
04 Efficiency grade N		81.6	62	10 Speed (rpm) n	min <sup>-1</sup>	1050
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-224856

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).  
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.  
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300100924

VBH0500CSPFS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Technical description

Size	500 mm
Motor size	90
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display with LED</li> <li>- Locked-rotor detection</li> <li>- Speed control</li> <li>- External 15-30 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- Power limiter</li> <li>- MODBUS</li> <li>- Motor current limitation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Temperature derating</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 61800-5-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300100924


VBH0500CSPFS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Product drawing

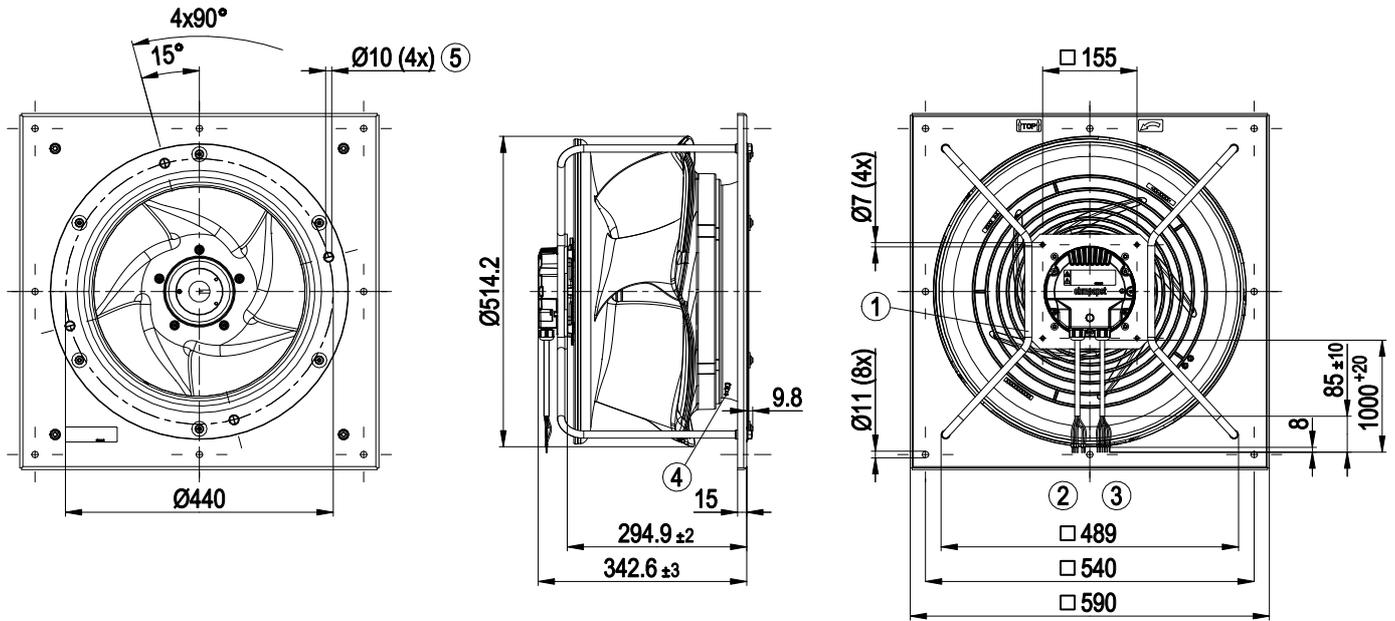

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Supply line (PWR) PVC AWG18 5x wire-end ferrule
3	Control wire (CTRL) PVC AWG22 6x wire-end ferrule
4	Inlet ring with pressure tap (k-factor: 290)
5	Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required

8300100924


VBH0500CSPFS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	PE	green/yellow	Protective earth
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	COM	orange	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	PWR	NC	orange	Status relay, floating status contact, break for failure
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I <sub>max</sub> =10 mA Short-circuit-proof, power supply for external devices, SELV alternative: 15-30 VDC input for parameterization via MODBUS without line voltage
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V / PWM, R <sub>i</sub> =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable (see table Optional interface functions)
	CTRL	IO2	white	Factory setting: Open collector output, U <sub>max</sub> =50 VDC, I <sub>max</sub> =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable (see table Optional interface functions)
	CTRL	RSA	gray	RS-485 interface for MODBUS RSA, SELV dielectric strength to MODBUS RSB +/-14 V, dielectric strength to GND +/-7 V
	CTRL	RSB	brown	RS-485 interface for MODBUS RSB, SELV dielectric strength to MODBUS RSA +/-14 V, dielectric strength to GND +/-7 V
		LED		green: status = good, ready for operation orange: status = warning red: status = failure

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Terminal/plug assignment

IO	IO mode configuration	electrical specification	configurable IO mode	configurable IO functions: normal / inverse
D158 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	Din1 (high active): digital input	source: set value
D158 [1]	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	Din1 (low active): digital input	source: sensor value
D158 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM: analog input	source: set value
D158 [9]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM (with pull up): analog input	source: sensor value
D159 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	Din1 (active high): digital input	switch: parameter set: #1 / #2
D159 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM: analog input	switch: control function: heating (pos.) / cooling (neg.)
D159 [5]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Tach out (open collector)	switch: direction of rotation: cw / ccw
D159 [6]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Diagnostics out (open collector)	switch: fan enable / disable
D159 [10]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Alarm out (open collector)	switch: set value source
D159 [11]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Autoaddressing pulse output (open collector)	switch: control function: heating (pos.) / cooling (neg.)
D159 [12]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	DCI-output (open collector)	switch: direction of rotation: cw / ccw
RSA	MODBUS RTU, parameter specification V7.1, SELV	MODBUS RTU, parameter specification V7.1, SELV	RS485 bus connection	source: input pulses autoaddressing
RSB				source: DCl in
COM	250 VAC / 2 A (AC1)	250 VAC / 2 A (AC1)	Relay	source: input pulses autoaddressing
NC				source: DCl in
Vout	Voltage 10 VDC, SELV	Voltage 10 VDC, SELV	Voltage output	source: input pulses autoaddressing
	15 - 30 VDC	15 - 30 VDC	Alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	source: input pulses autoaddressing

### Medium (M2)

Functions and parameter description  
MODBUS V7.1

- configurable function
- (○) function to be activated via IO Mode

### MODBUS Register for IO mode configuration

#### electrical specification

IO	IO mode configuration	electrical specification	configurable IO mode	configurable IO functions: normal / inverse
D158 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	Din1 (high active): digital input	source: set value
D158 [1]	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	active: applied voltage < 1.5 VDC not active: pin open or applied voltage 3.5 - 50 VDC, SELV	Din1 (low active): digital input	source: sensor value
D158 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM: analog input	source: set value
D158 [9]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM (with pull up): analog input	source: sensor value
D159 [0]	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	active: applied voltage 3.5 - 50 VDC not active: pin open or applied voltage < 1.5 VDC, SELV	Din1 (active high): digital input	switch: parameter set: #1 / #2
D159 [2]	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$ , SELV	Ain1 0-10 V/PWM: analog input	switch: control function: heating (pos.) / cooling (neg.)
D159 [5]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Tach out (open collector)	switch: direction of rotation: cw / ccw
D159 [6]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Diagnostics out (open collector)	switch: fan enable / disable
D159 [10]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Alarm out (open collector)	switch: set value source
D159 [11]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	Autoaddressing pulse output (open collector)	switch: control function: heating (pos.) / cooling (neg.)
D159 [12]	Umax = 50 VDC, Imax = 20 mA, SELV	Umax = 50 VDC, Imax = 20 mA, SELV	DCI-output (open collector)	switch: direction of rotation: cw / ccw
RSA	MODBUS RTU, parameter specification V7.1, SELV	MODBUS RTU, parameter specification V7.1, SELV	RS485 bus connection	source: input pulses autoaddressing
RSB				source: DCl in
COM	250 VAC / 2 A (AC1)	250 VAC / 2 A (AC1)	Relay	source: input pulses autoaddressing
NC				source: DCl in
Vout	Voltage 10 VDC, SELV	Voltage 10 VDC, SELV	Voltage output	source: input pulses autoaddressing
	15 - 30 VDC	15 - 30 VDC	Alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	source: input pulses autoaddressing

8300100924


VBH0500CSPFS

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

## Curves: Air performance 50 Hz

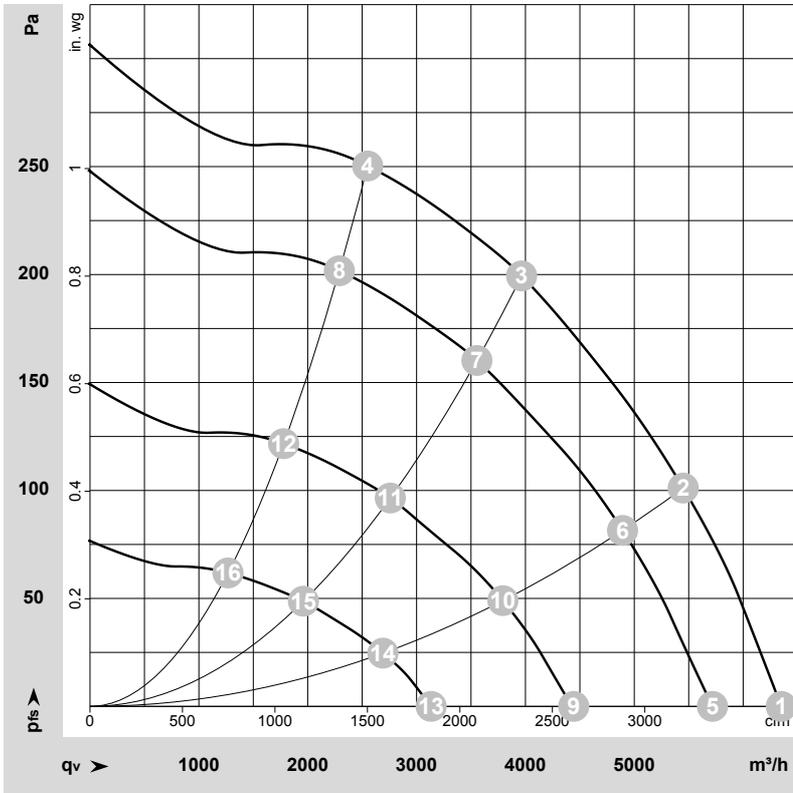

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-224856-1  
Date: 2023-01-19  
Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	LwA	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	dB	m <sup>3</sup> /h	Pa	cfm	in. wg
1	1~	230	50	1050	234	1.51	65	73	77	78	6350	0	3735	0.00
2	1~	230	50	1050	317	1.99	60	68	71	73	5450	100	3205	0.40
3	1~	230	50	1050	370	2.30	54	61	66	67	3965	200	2335	0.80
4	1~	230	50	1050	343	2.14	54	61	66	67	2550	250	1500	1.00
5	1~	230	50	945	171	1.13	62	71	74	76	5720	0	3365	0.00
6	1~	230	50	945	229	1.48	57	65	69	71	4890	82	2880	0.33
7	1~	230	50	945	263	1.68	51	59	64	65	3555	160	2090	0.64
8	1~	230	50	940	246	1.58	52	58	63	64	2290	202	1350	0.81
9	1~	230	50	730	84	0.60	58	66	70	71	4445	0	2615	0.00
10	1~	230	50	735	109	0.76	52	60	64	65	3795	49	2230	0.20
11	1~	230	50	735	123	0.85	47	53	58	59	2760	97	1625	0.39
12	1~	230	50	735	116	0.80	46	52	57	58	1780	122	1045	0.49
13	1~	230	50	525	34	0.27	48	56	63	64	3135	0	1845	0.00
14	1~	230	50	525	43	0.33	42	50	57	58	2690	25	1585	0.10
15	1~	230	50	525	48	0.36	38	46	53	53	1960	49	1155	0.20
16	1~	230	50	525	45	0.35	37	44	49	51	1270	62	745	0.25

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase