

8300100970

VWS0200XSLBZ

# EC axial fan

sickle-shaped blades (S series)

ESM fan housing

8300100970 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

<b>Item</b>	<b>8300100970</b>		
<b>Motor</b>	<b>E05526-8</b>		
Phase		1~	1~
Nominal voltage	VAC	230	230
Nominal voltage range	VAC	200 .. 240	200 .. 240
Frequency	Hz	50/60	50/60
Method of obtaining data		ml	
Speed (rpm)	min <sup>-1</sup>	1600	1100
Power consumption	W	15	
Current draw	A	0.13	
Max. back pressure	Pa	35	
Max. back pressure	in. wg	0.14	
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	50	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



8300100970

VWS0200XSLBZ

# EC axial fan

sickle-shaped blades (S series)

ESM fan housing

## Technical description

Size	200 mm
Motor size	55
Blade material	PP plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP55; only with suitable plug, to be installed by customer
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Speed selection max./min.</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Thermal overload protection for motor</li> </ul>
Speed levels	2
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 0.25 mA
Electrical hookup	Plug
With cable	Lateral
Protection class assignment	<p>II; This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection. If there is a PE connection point on the housing, it must not be visible after installation.</p>
Safety class of the permissible refrigerants according to EN378 / ISO5149-1	A3/B3
Maximum surface temperature	229 °C
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; EN 60335-2-24; EN 60335-2-80; EN 60335-2-89; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.
Approval	EAC; VDE




8300100970  
VWS0200XSLBZ

# EC axial fan

sickle-shaped blades (S series)  
ESM fan housing

## Product drawing

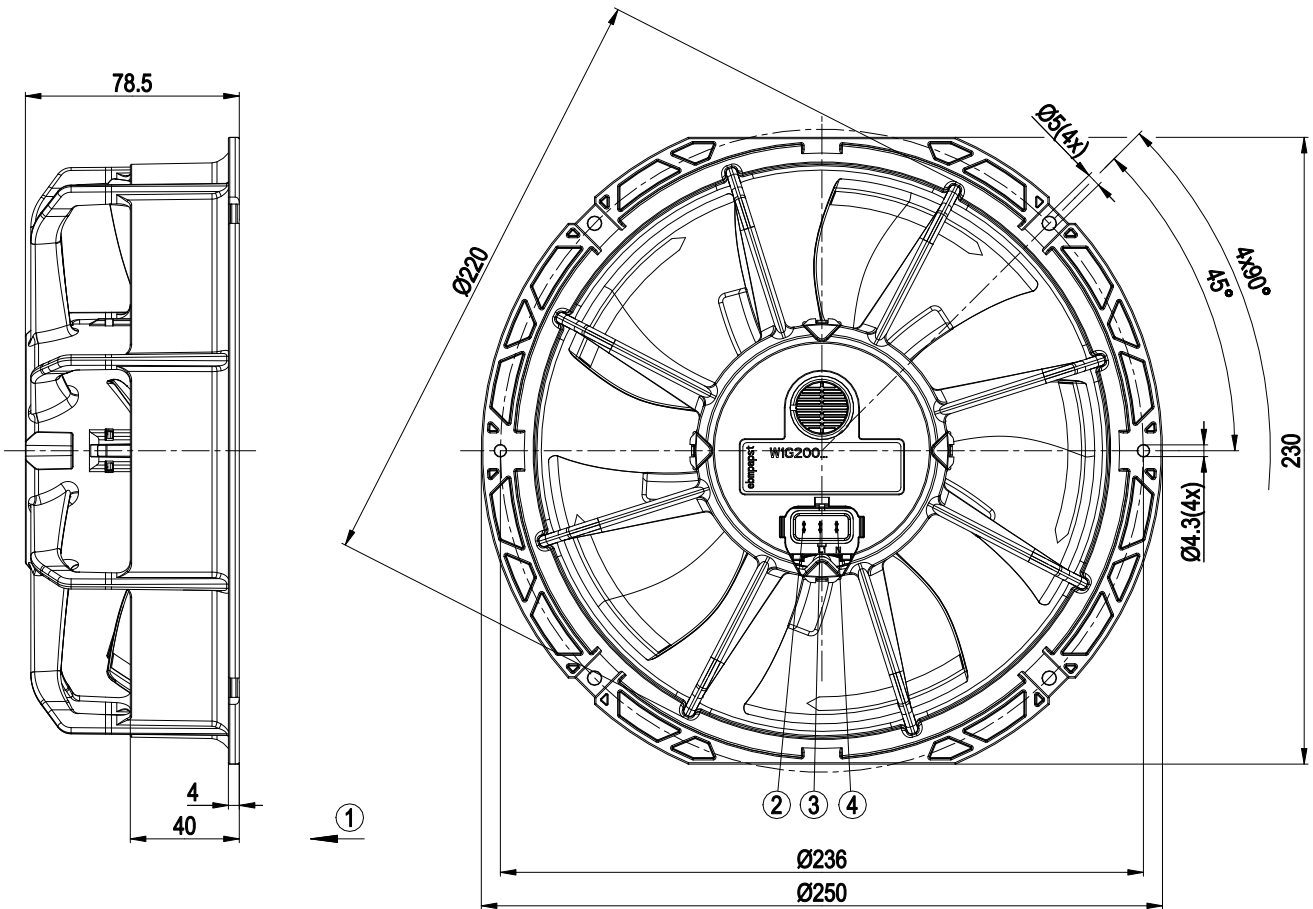

1	Airflow direction "V"
2	Pin S, speed selection (flat plug 2.8 x 0.5)
3	Pin L1, phase (flat plug 2.8 x 0.5)
4	Pin N, neutral conductor (flat plug 2.8 x 0.5)




8300100970  
VWS0200XSLBZ

# EC axial fan

sickle-shaped blades (S series)  
ESM fan housing

## Connection diagram

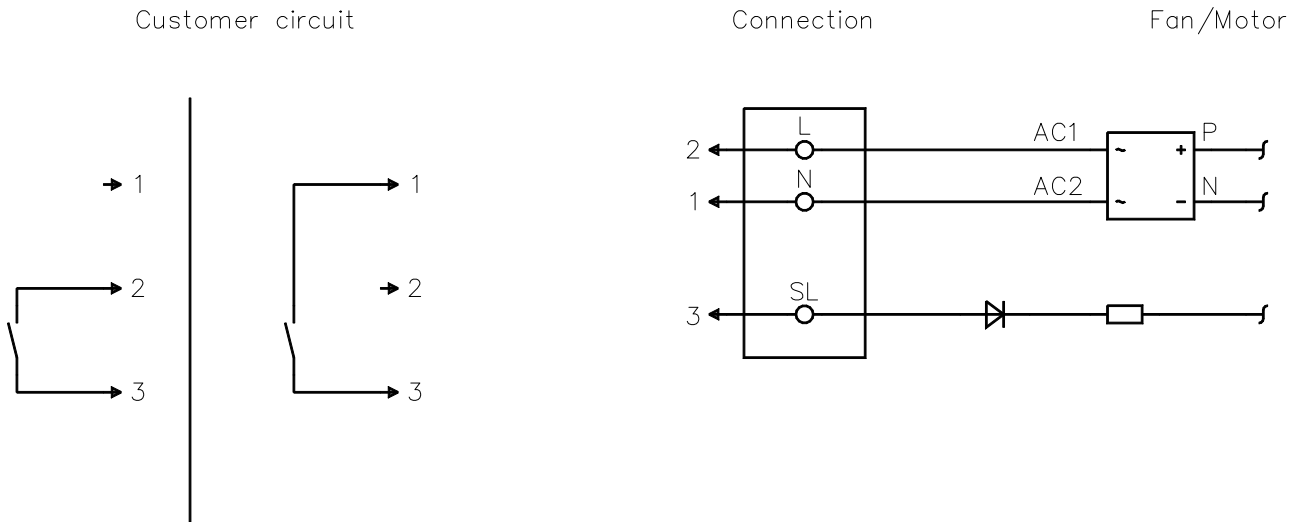

No.	Conn.	Designation	Color	Function/assignment
1	N		blue	Power supply, neutral conductor, see nameplate for voltage range
2	L		black	Power supply, phase, see nameplate for voltage range
3	SL		brown	Speed selection: switch open speed 1, switch closed speed 2




8300100970  
VWS0200XSLBZ

# EC axial fan

sickle-shaped blades (S series)  
ESM fan housing

## Curves: Air performance 50 Hz

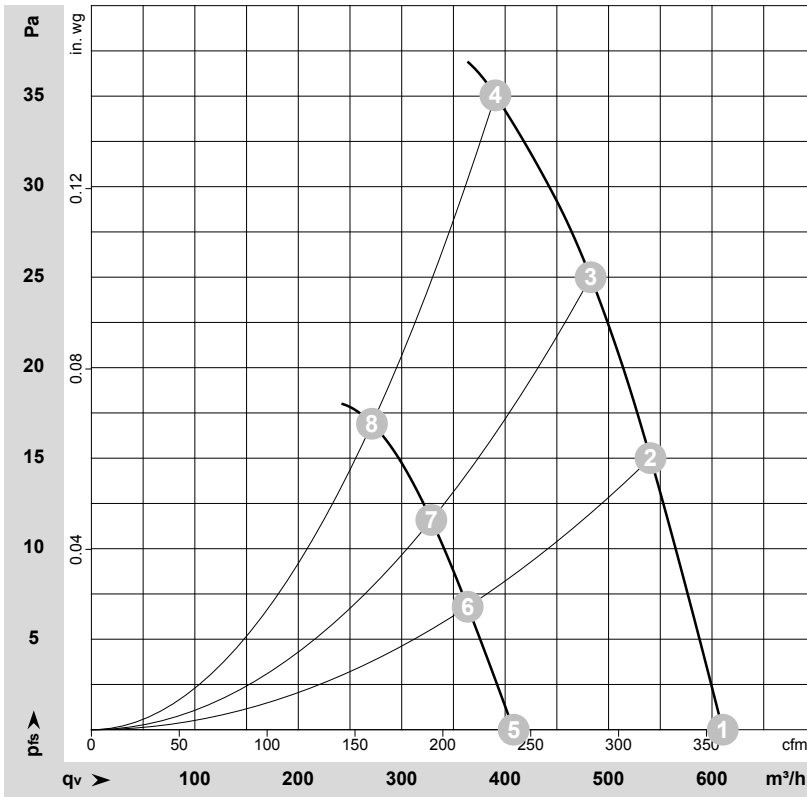

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-193131-1  
Measurement: LU-193162-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Stage	Wired	U	f	n	P <sub>e</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
			V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	2	1~	230	50	1600	12	0.11	45	52	610	0	360	0.00
2	2	1~	230	50	1600	14	0.13	42	50	540	15	320	0.06
3	2	1~	230	50	1600	15	0.13	42	50	485	25	285	0.10
4	2	1~	230	50	1600	15	0.13	45	53	390	35	230	0.14
5	1	1~	230	50	1100	5.0	0.05	33	41	410	0	240	0.00
6	1	1~	230	50	1100	5.0	0.06	31	39	365	7	215	0.03
7	1	1~	230	50	1100	5.0	0.06	31	40	330	12	195	0.05
8	1	1~	230	50	1100	6.0	0.06	33	42	270	17	160	0.07

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

