

8300101197
VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake
with support bracket

8300101197 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101197	
Motor	E11228-40	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2750
Power consumption	W	1500
Current draw	A	2.3
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	70.4	53.3	09 Power consumption P_{ed}	kW	1.49
02 Measurement category		A		09 Air flow q_v	m ³ /h	4285
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	826
04 Efficiency grade N		79.1	62	10 Speed (rpm) n	min ⁻¹	2715
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-226951

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101197

VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Technical description

Size	355 mm
Motor size	112
Rotor surface	Painted black
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	An occasional start-up between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as such as refrigerating plants in cold stores), a fan design with special low-temperature bearings must be used.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Operation and alarm display - External 24 V input (parameter setting) - Alarm relay - Integrated PID controller - MODBUS V5.1 - Motor current limitation - PFC, passive - RS-485 MODBUS-RTU - Soft start - EEPROM write cycles: 100,000 maximum - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal switch auto reset, internally connected
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; UKCA; CE

8300101197
VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake
with support bracket


Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1
Comment	Maximum permissible operating altitude 4000 m above sea level according to DIN 61800-5-1_2008_Sec. 4.3.6.4.1 overvoltage category II. Up to 2000 m above sea level, overvoltage category III applies.

8300101197
 VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake
 with support bracket

Product drawing

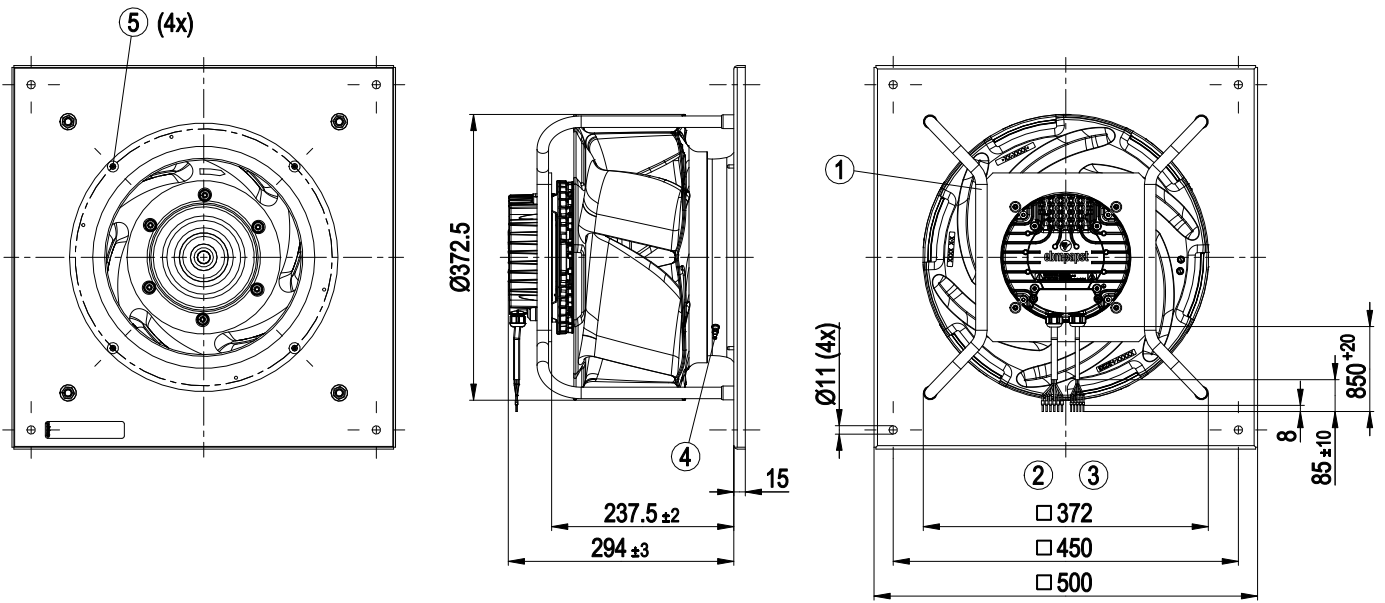

1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable PVC AWG18 6x wire-end ferrule
3	Cable PVC AWG22 5x wire-end ferrule
4	Inlet ring with pressure tap (k-factor: 160)
5	Attachment for inlet ring and FlowGrid (00400-2-2957 not included in scope of delivery)

8300101197


VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Connection diagram

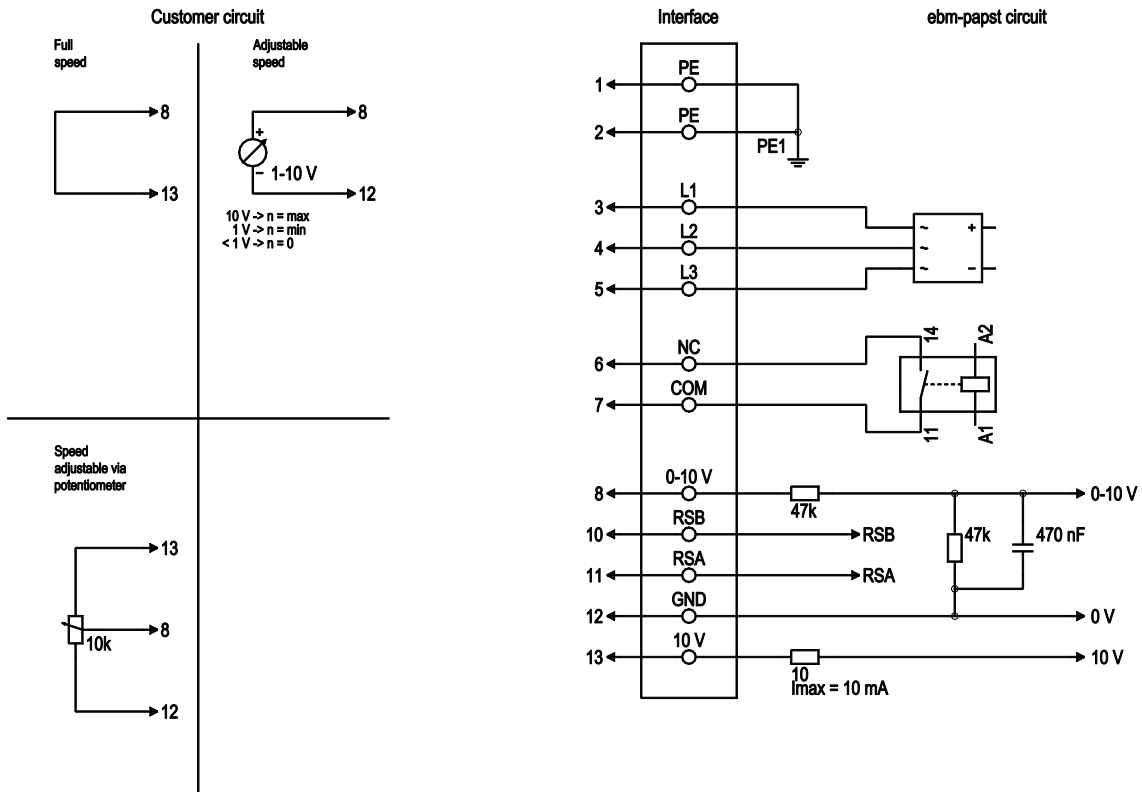

No.	Conn.	Designation	Color	Function/assignment
1	1, 2	PE	green/yellow	Protective earth
1	3	L1	black	Power supply
1	4	L2	black	Power supply
1	5	L3	black	Power supply
1	6	NC	white 1	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
1	7	COM	white 2	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) / min. 10 mA; reinforced insulation on supply side and basic insulation on control interface side
2	8	0-10V	yellow	Analog input (set value), 0-10 V, $R_i = 100\text{ k}\Omega$, adjustable curve, SELV
2	10	RSB	brown	RS485 interface for MODBUS, RSB; SELV
2	11	RSA	white	RS485 interface for MODBUS, RSA; SELV
2	12	GND	blue	Reference ground for control interface, SELV
2	13	+10V	red	Fixed voltage output 10 VDC, $+10\text{ V} \pm 3\%$, max. 10 mA, short-circuit-proof power supply for external devices (e.g. pot), SELV fixed voltage input 24 VDC for setting parameters via MODBUS without line voltage supply

8300101197


VBH0355STRHS

EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Curves: Air performance 50 Hz

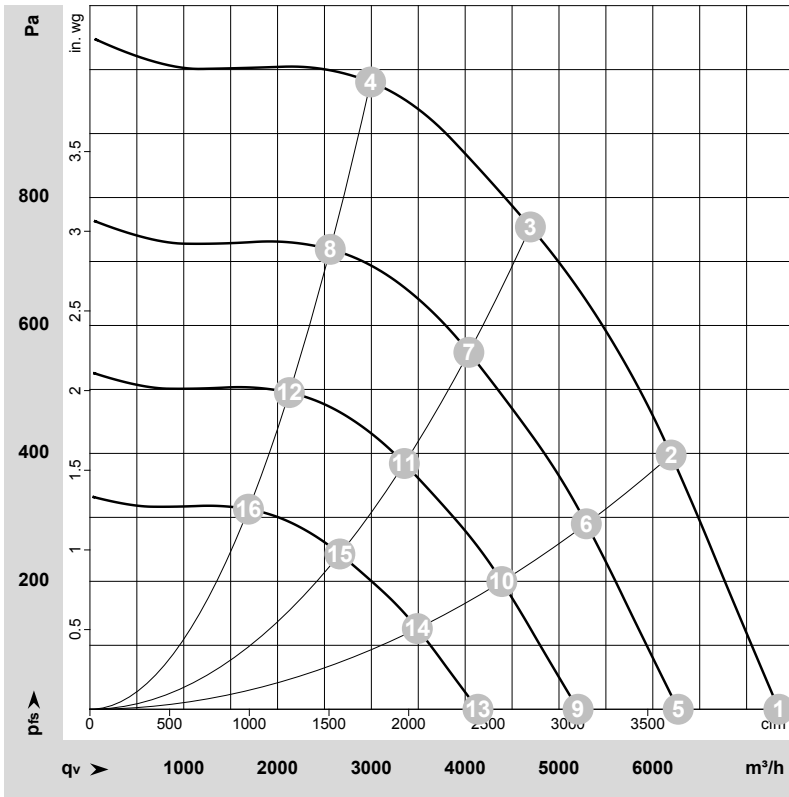

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-226951-1
Date: 2026-05-16
Nozzle: 35650-2-4013

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	2750	962	1.49	77	84	89	90	7345	0	4325	0.00
2	3~	400	50	2750	1357	2.08	73	80	86	87	6195	400	3645	1.61
3	3~	400	50	2750	1500	2.30	70	76	84	84	4695	750	2765	3.01
4	3~	400	50	2750	1445	2.21	75	84	87	89	2990	980	1760	3.93
5	3~	400	50	2350	599	0.93	73	80	85	86	6270	0	3690	0.00
6	3~	400	50	2350	845	1.29	69	76	82	83	5290	290	3115	1.16
7	3~	400	50	2350	950	1.45	66	73	80	81	4040	558	2375	2.24
8	3~	400	50	2350	908	1.39	71	80	83	85	2560	719	1510	2.89
9	3~	400	50	1950	342	0.53	68	76	80	81	5205	0	3065	0.00
10	3~	400	50	1950	483	0.74	64	71	77	78	4390	200	2585	0.80
11	3~	400	50	1950	543	0.83	61	68	75	76	3350	384	1975	1.54
12	3~	400	50	1950	519	0.79	67	75	79	80	2125	495	1250	1.99
13	3~	400	50	1550	172	0.27	62	70	74	76	4135	0	2435	0.00
14	3~	400	50	1550	243	0.37	58	65	72	73	3490	126	2055	0.51
15	3~	400	50	1550	273	0.42	55	62	69	70	2665	243	1570	0.98
16	3~	400	50	1550	261	0.40	61	70	73	75	1690	313	995	1.26

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase