

Product Data Sheet **8300101206**
VKCH040DKDGS
DiaForce40

ebmpapst

engineering a better life



DiaForce40

INDEX

1 General 3

2 Mechanics 3

2.1 General 3

2.2 Connections 3

3 Operating Data 4

3.1 Electrical Interface - Input 4

3.2 Electrical Operating Data 5

3.3 Electrical Interface - Output 6

3.4 Electrical Features 7

3.5 Aerodynamics 8

3.6 Sound Data 9

4 Environment 9

4.1 General 9

4.2 Climatic Requirements 9

5 Safety 10

5.1 Electrical Safety 10

5.2 Approval Tests 10

6 Reliability 10

6.1 General 10

1 General

| | | |
|-------------------------------------|---|--|
| Fan type | Mixed-flow fan | |
| Rotating direction looking at rotor | Counterclockwise | |
| Airflow direction | Air inlet and air outlet axially | |
| Bearing system | Ball bearing | |
| Mounting position - shaft | Horizontal/rotor down: vertical/rotor up: any | |


2 Mechanics

2.1 General

| | | |
|---|---|--|
| Width | 40 mm | |
| Height | 40 mm | |
| Depth | 56 mm | |
| Mass | 74 g | |
| Housing material | Plastic | |
| Impeller material | Plastic | |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 30 Ncm Remaining corners: 30 Ncm | |
| Screw size | ISO 4762 - M3 degreased, without an additional brace and without washer | |

2.2 Connections

| | | |
|-----------------------|------------|--|
| Electrical connection | Wires | |
| Lead wire length | L = 310 mm | |
| Tolerance | +/- 10 mm | |

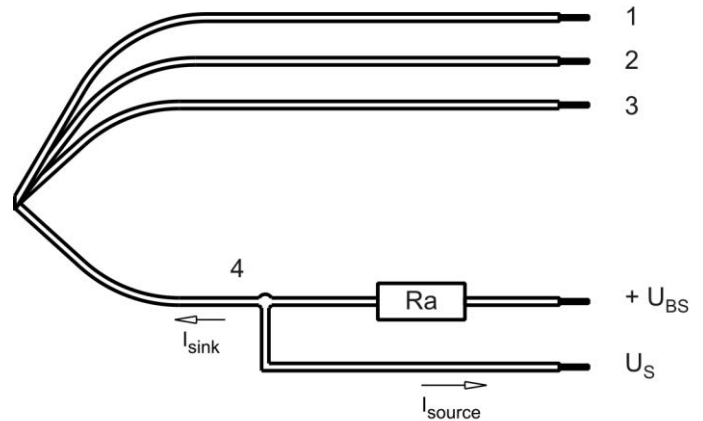

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|--------|-----------|-----------|---------------------|
| 1 | red | + UB | AWG 26 | 1,0 mm |
| 2 | blue | - GND | AWG 26 | 1,0 mm |
| 3 | violet | PWM | AWG 26 | 1,0 mm |
| 4 | white | Tacho | AWG 26 | 1,0 mm |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.



3 Operating Data

3.1 Electrical Interface - Input

| | |
|---------------|-----|
| Control input | PWM |
|---------------|-----|

Features

| | | |
|-----------------|----------------|----------------------------------|
| Input type | Open collector | |
| PWM - Frequency | | 1 kHz - 30 kHz typical: 2 kHz |

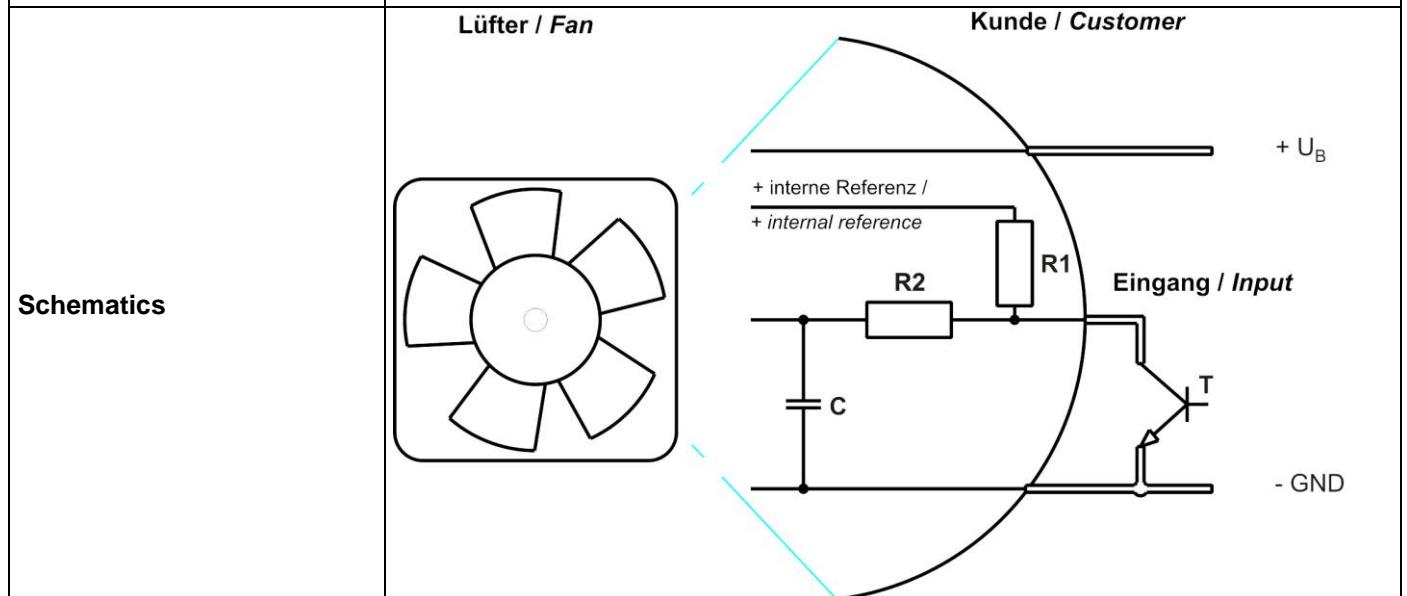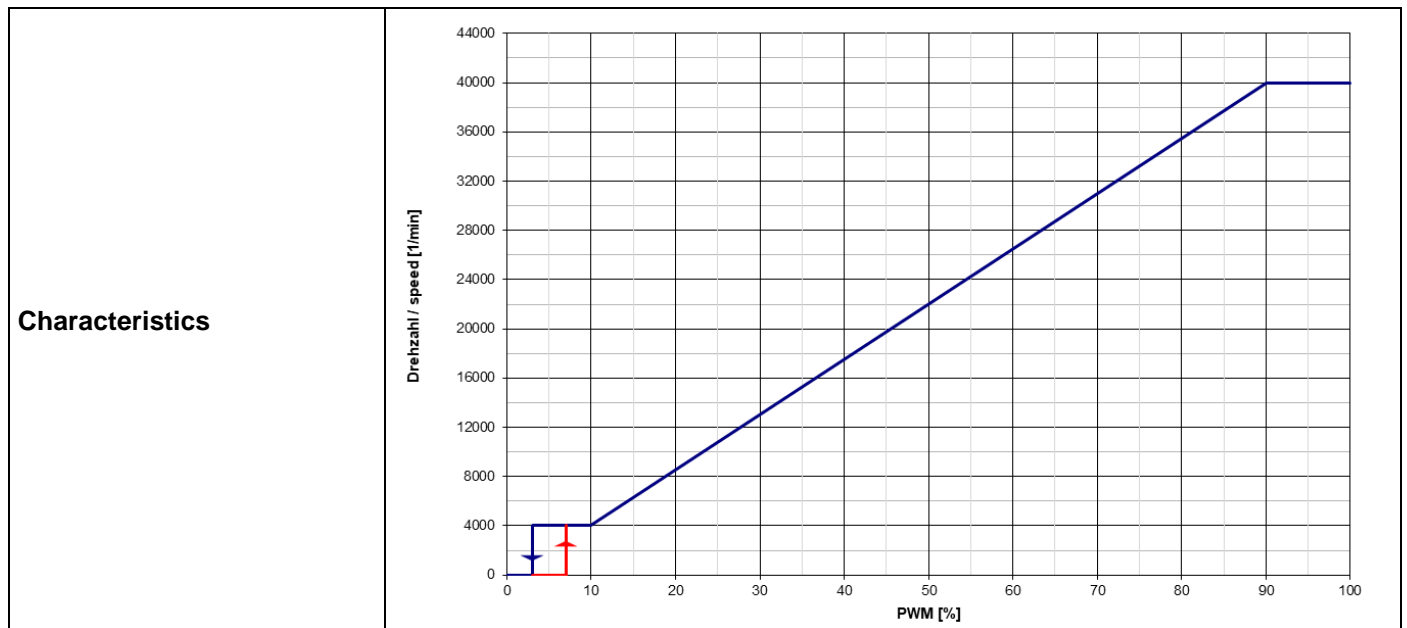

Speed control: 0... 100 %, PWM-Low < 0,2 V
 R1=5,1kOhm; R2=220kOhm; internal reference: 5V

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 15 minutes. In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see chapter aerodynamics)
I: corresp. to arithm. mean current value


| Name | Condition |
|----------|----------------------|
| PWM 0001 | PWM: 100 %; f: 2 kHz |

Unless otherwise specified in the table a general fan speed tolerance applies, relating to the maximum value of the required characteristic curve. Tolerance: +-5%

| Features | Condition | Symbol | Values | | |
|------------------------------|----------------|----------------|--------------|--------------|--------------|
| Voltage range | | U | 36 V | | 56 V |
| Nominal voltage | | U _N | | 48 V | |
| Power consumption | $\Delta p = 0$ | P | 23 W | 26,1 W | 26,1 W |
| Tolerance | PWM 0010 | | +/- 17,5 % | +/- 20 % | +/- 20 % |
| Current consumption | $\Delta p = 0$ | I | 650 mA | 540 mA | 470 mA |
| Tolerance | PWM 0010 | | +/- 17,5 % | +/- 20 % | +/- 20 % |
| Speed | $\Delta p = 0$ | n | 38.900 1/min | 40.000 1/min | 40.000 1/min |
| Tolerance | PWM 0010 | | +/- 12,5 % | +/- 5 % | +/- 5 % |
| Starting current consumption | | | | <= 2.200 mA | |


3.3 Electrical Interface - Output

| | |
|------------|---------------------|
| Tacho type | /2 (open collector) |
|------------|---------------------|

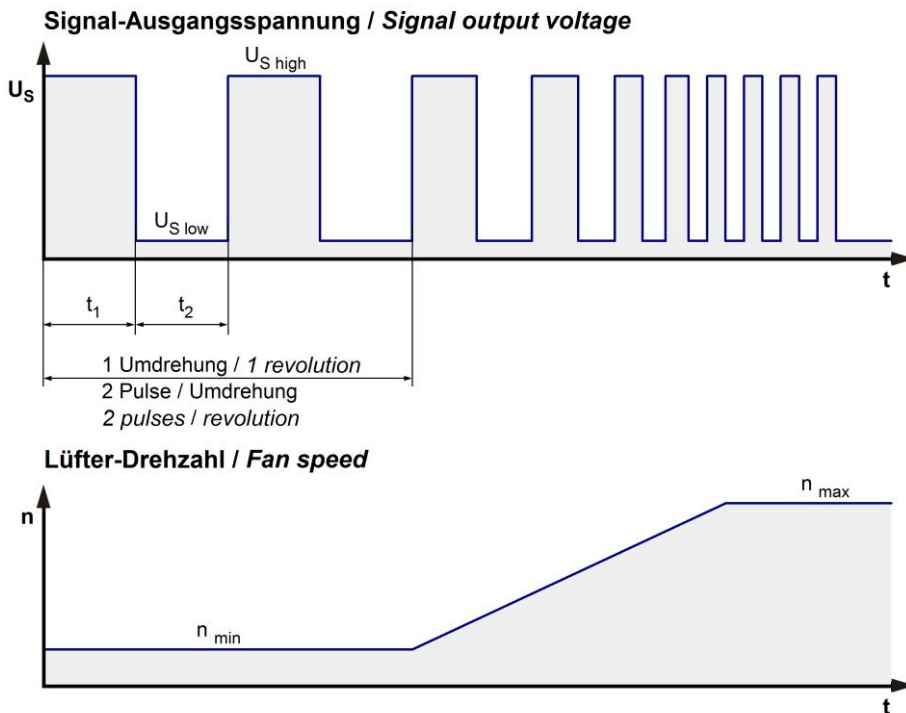

$$R_a = \frac{U_{BS} - U_{S\ low}}{I_{sink}}$$

Lüfter / Fan Kunde / Customer

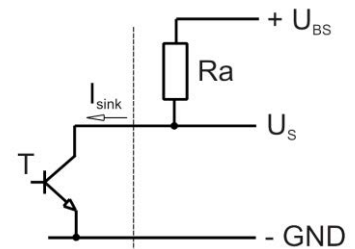


| Features | Note | Values |
|---------------------------|--|------------------------|
| Tacho operating voltage | U_{BS} | $\leq 30\text{ V}$ |
| Tacho signal Low | $U_{S\ low}$ | $\leq 0,4\text{ V}$ |
| Tacho signal High | $U_{S\ high}$ | $\leq 30\text{ V}$ |
| Maximum sink current | I_{sink} | 4 mA |
| External resistor | External resistor R_a from U_{BS} to U_S required. All voltages measured to GND. | |
| Tacho frequency | $(2 \times n) / 60$ | |
| Tacho isolated from motor | No | |
| Slew rate | | $\geq 0,5\text{ V/us}$ |

n = revolutions per minute (1/min)

3.4 Electrical Features

| | | |
|---|---|--|
| Electronic function | Speed-Controlled | |
| Reversed polarity protection | N-CH FET | |
| Max. residual current at U_N | $I_F \leq 1 \text{ mA}$ | |
| Locked rotor protection | Auto restart | |
| Locked rotor current at U_N | I_{block} approx. 1.500 mA | |
| Clock signal at locked rotor Extended Downtime | t_3 / t_4 typical: 0,25 s / 0,8 s t_5 : 5 s after 5 start-up tests | |
| Internal fuse | None | |

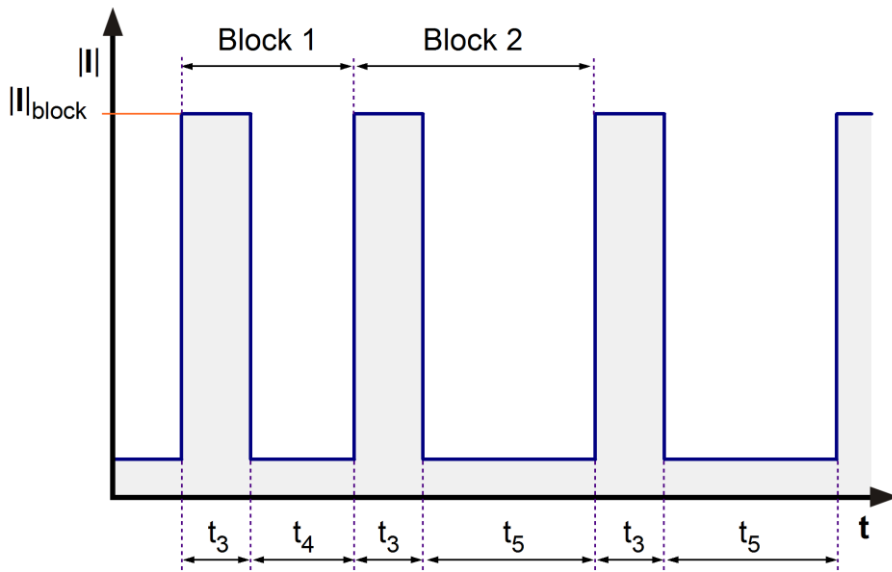

First five blocks: Block 1 t_3/t_4 typically 0.25s/0,8s. Afterwards cyclical: Block 2 t_3/t_5 typically 0.25s/5s.

3.5 Aerodynamics

Measurement conditions:

Measured with a double chamber intake rig acc. to DIN EN ISO 5801.

Air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;

In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.


The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions. Power consumption of the fan motor when operating at normal voltage is shown. Depending on the operating conditions of the application, the power input may be higher.

a.) Operation condition:

| | | | |
|-------------------------------|---------------------|--|--|
| 40.000 1/min at free air flow | PWM 100 %; f: 2 kHz | | |
|-------------------------------|---------------------|--|--|

| | | |
|---|----------------------|--|
| Max. free-air flow ($\Delta p = 0 / \dot{V} = \text{max.}$) | 54 m ³ /h | |
| Max. static pressure ($\Delta p = \text{max.} / \dot{V} = 0$) | 2.390 Pa | |

Preliminary data.

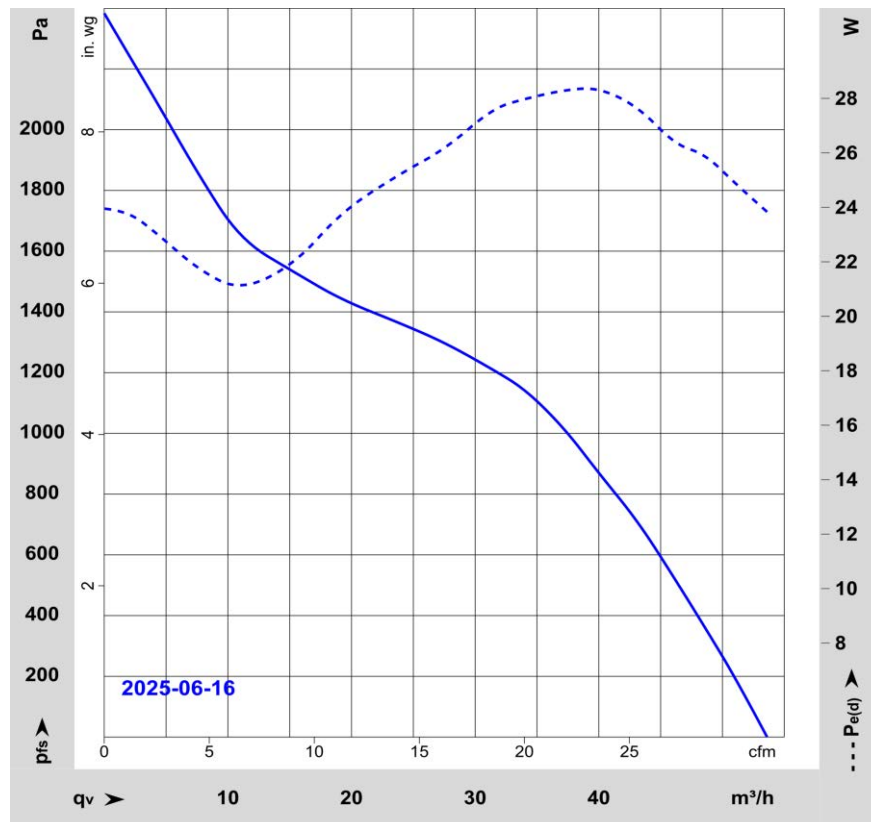

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: According to ISO 10302-1
Measured in a semianechoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

| | | | |
|-------------------------------|---------------------|--|--|
| 40.000 1/min at free air flow | PWM 100 %; f: 2 kHz | | |
|-------------------------------|---------------------|--|--|

| | | | |
|---|-------------------------------|--|--|
| Optimal operating point | 46 m ³ /h @ 525 Pa | | |
| Sound power level at the optimal operating point | 7,5 bel(A) | | |
| Sound pressure level at free air flow, measured in rubber bands | 66 dB(A) | | |

Preliminary data.

4 Environment

4.1 General

| | | | |
|--|--------|--|--|
| Min. permitted ambient temperature TU min. | -20 °C | | |
| Max. permitted ambient temperature TU max. | 70 °C | | |
| Min. permitted storage temperature TL min. | -40 °C | | |
| Max. permitted storage temperature TL max. | 80 °C | | |

4.2 Climatic Requirements

| | | | |
|--------------------------------|-----------|--|--|
| IP-protection type (certified) | IP 20 **) | | |
| Environmental class | H0 | | |

**) The specification of the IP protection refers to the conditions mentioned in certification of the fan. The above mentioned short description of the protection scope is not final. For detailed information of the respective protection scope and definitions, see certification as well as DIN EN 60529 (protection by housings) and ISO 20653 (for vehicles) with the letter K.

Short description of the IP-protection type:

Solid particle Protection: Protected against solid particles with a diameter of 12.5 mm and larger.
Protection against deliberate contact: Protected against contact to hazardous parts with a finger.
Protection against water: No protection.

Please require severity levels and specification parameters from the responsible development departments.

5 Safety

5.1 Electrical Safety

| | | |
|---|-----|--|
| Dielectric strength DIN EN 62368 and DIN EN 60335 A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground. | | |
| Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min. | | |
| Clearance / creepage distance | | |
| Protection class | III | |

5.2 Approval Tests




| | | |
|---------|--|---|
| CE | EC Declaration of Conformity | Yes |
| UKCA | UK Conformity Assessed | Yes |
| EAC | Eurasian Conformity | Yes |
| America | UL - Underwriters Laboratories | Yes / UL507, Electric Fans E38324 |
| Europe | VDE - Association for Electrical or UL - Underwriters Laboratories or comparable | Yes / Approval acc. to EN 62368 - Audio/video, information and communication technology equipment |
| Canada | UL - Underwriters Laboratories or CSA - Canadian Standards Association | Yes / CSA audited by UL according to C22.2 No. 113 Fans and Ventilators |
| China | CCC - China Compulsory Certification or CQC - China Quality Certification | Yes / GB 12350 Safety Requirements for small Power Motors |

6 Reliability

6.1 General

| | | |
|--|-----------|--|
| Life expectancy L10 at TU = 40 °C | 70.000 h | |
| Life expectancy L10 at TU max. | 35.000 h | |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 120.000 h | |

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. If reproduction or unauthorized distribution of this document occurs without a written order from the applicable document referred to in this document, only the English version shall be administrative and legally binding in the event of contradictions in content.

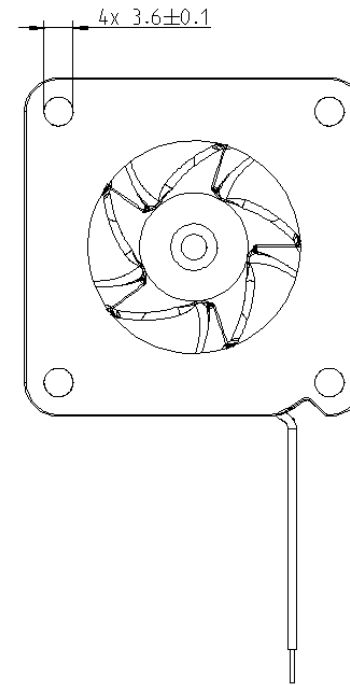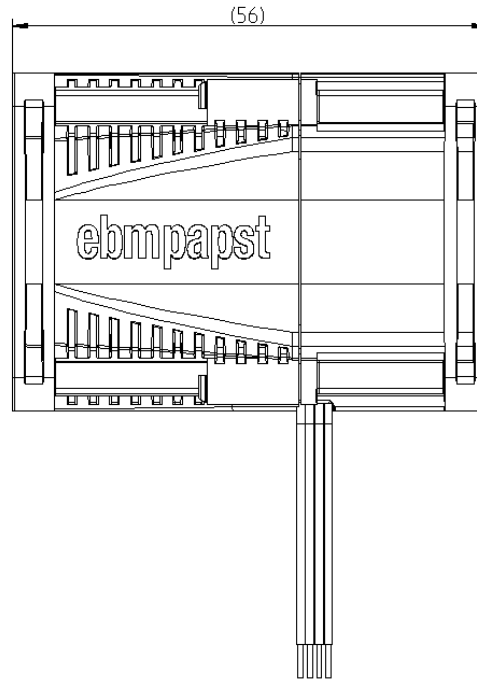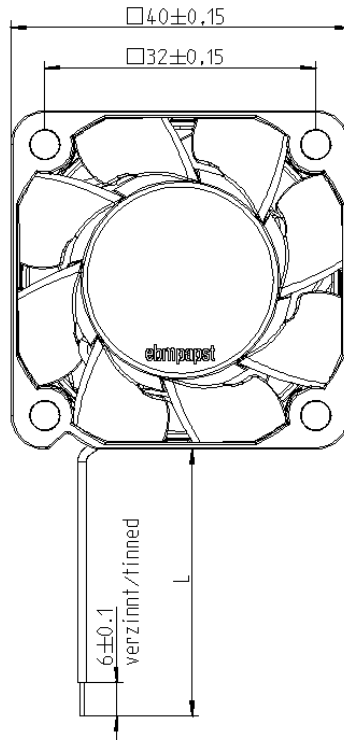

- kein Axialspiel der Kugellager durch Federausgleich /
No axial clearance of the ball bearings due to a pre-load spring
- Anzahl und Länge der Litzen siehe Produktspezifikation
Number an Length of the wires see product specifi

| | | | | | | | |
|------------------------------------|------------------|------------------|------------------|--------------|--------|------|------------|
| Title | | | | Digital sign | | | |
| First created for | Index | Doc. type | Sheet | | | | |
| | Designed name | Designed date | | | | | |
| Substitute for | Released name | Released date | | | | | |
| | See digital sign | See digital sign | | | | | |
| ebmpapst | | | | Tolerances | | | |
| ebm-papst St.Georgen GmbH & Co. KG | | | | | | | |
| | Scale | Format | Document status | Inv. | Kh-Nr. | Date | Name |
| | 2:1 | A3 | See digital sign | | | | |
| | | | | 2D-CAD | | | File |
| | | | | 3D-CAD | | | Deviations |