

8300101213
VBF0500CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

ebm-papst Mulfingen GmbH & Co. KGaA & Co. KG

Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101213	
Motor	E15034-120	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2840
Power consumption	W	6210
Current draw	A	9.6
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	74.3	59.7	09 Power consumption P_{ed}	kW	6.07
02 Measurement category		A		09 Air flow q_v	m³/h	12305
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1274
04 Efficiency grade N		76.6	62	10 Speed (rpm) n	min ⁻¹	2840
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-215273

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101213
VBF0500CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Technical description

Size	500 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Spacer material	Aluminum
Inlet nozzle material	ABS plastic
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.4 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
Power Factor Correction (PFC)	Passive (through low-capacitance DC link)
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection

8300101213
VBF0500CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1

8300101213


VBF0500CTTRS

EC centrifugal module - RadiPac

backward-curved, single-intake

with cube design

Product drawing

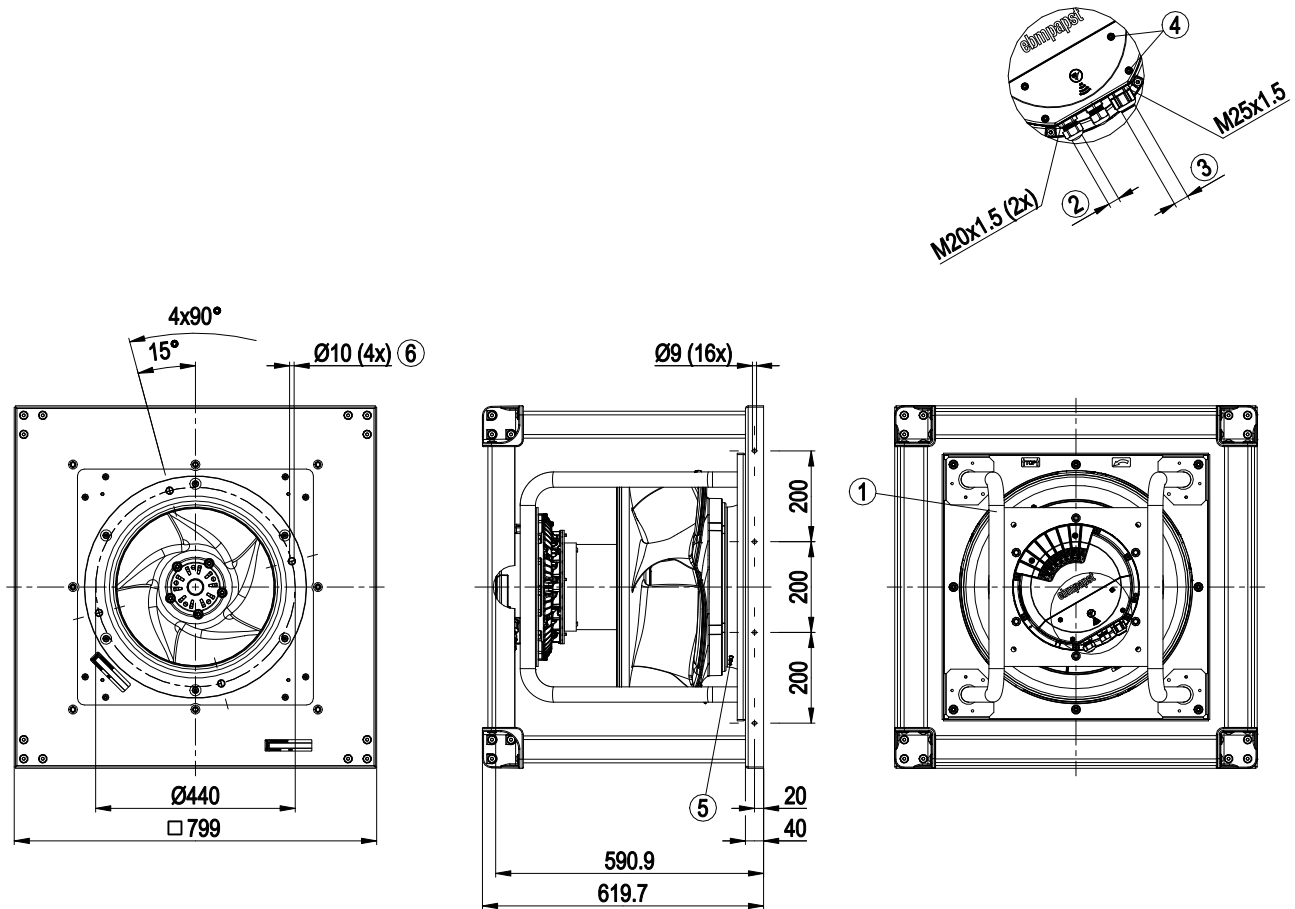





1	Installation position: Shaft horizontal (only install support struts vertically as illustrated)
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ± 0.9 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 3 ± 0.3 Nm
5	Inlet ring with pressure tap (k-factor: 290)
6	Fastening holes for FlowGrid 35505-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Accessory part

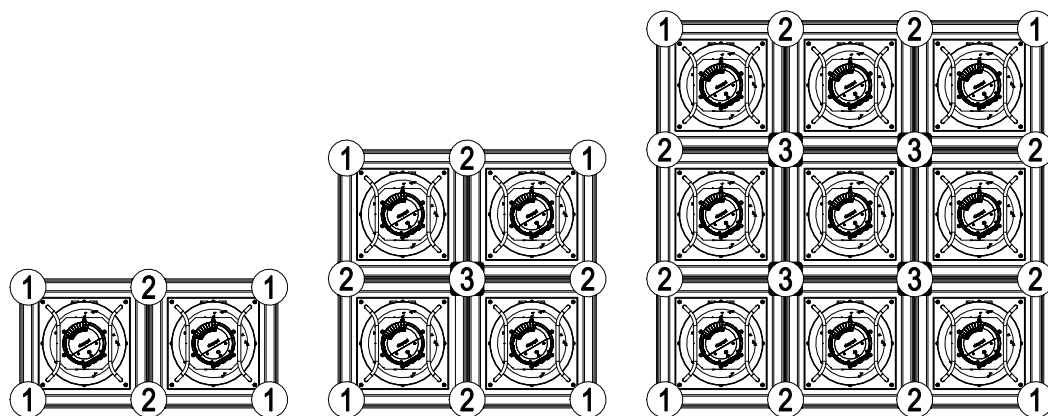

① 	4x	4x	4x
② 	2x	4x	8x
③ 	-	1x	4x

1 Angle connector 93570-2-4060 for fastening to the floor, wall, or ceiling

2 Side connector 93572-2-4060 for fastening to the floor, wall, ceiling, or additional FanGrid fan

3 Cross connector 93574-2-4060

The angle, side and cross connectors are fastened with the screws already present on the fan in the corner connectors. The screws have to be fitted by hand and secured with a tightening torque of 30 ± 4.5 Nm. Screws for fastening to the floor, wall, or ceiling are not included in scope of delivery.



There are four holes on each edge of the flange plate for screws. These holes must also be used for fastening to the floor, wall, ceiling or adjacent fans. Use M8 or 8 mm diameter screws and, if necessary, screw anchors of sufficient size and strength that the fan assembly cannot come loose even under heavy load.

Maximum height: 5 FanGrid fans vertically. The assembly must be at least as wide as it is high. Example:
3 FanGrid fans vertically = at least 3 FanGrid fans horizontally.

In a structure of one FanGrid fan in height and several FanGrid fans wide, the FanGrid fans must be screwed to the floor, the ceiling and the adjacent FanGrid fans.

For a height of two or more FanGrid fans, the FanGrid fans must be screwed to the floor, the ceiling, the wall and the adjacent FanGrid fans.

Fitting instructions

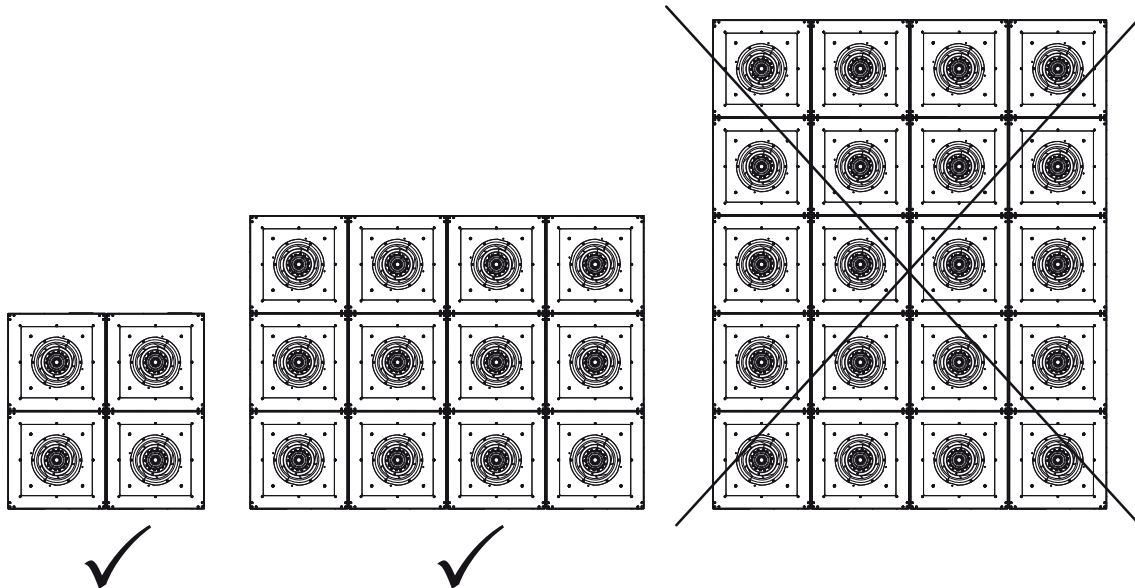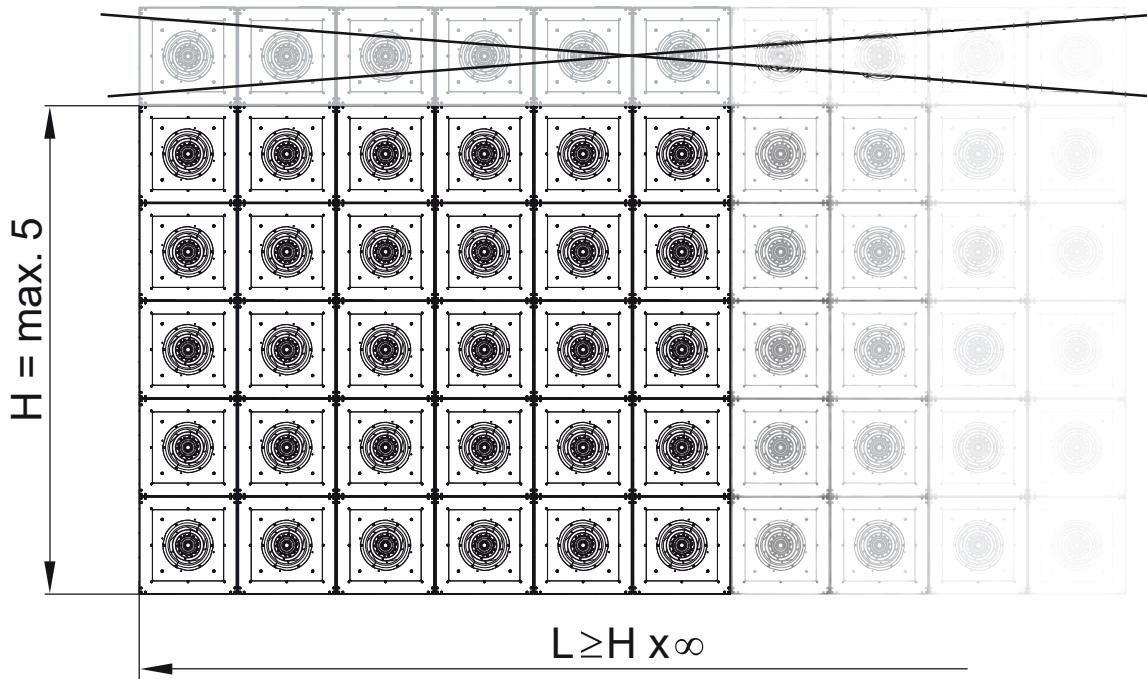

Assembled FanGrids may not be transported.

There is a risk that the assembly could fall over or be damaged.

If it is not possible to mount the fan combination to the floor, wall and ceiling, the fan combination must be mounted in an auxiliary construction that is suitably stable.

The construction in which the fans are mounted must have sufficient strength to bear any loads that may occur over the entire service life.


In order to avoid heavy loads due to the composite bending, from a height of four fans and a width of four fans, a consistent, vertical strut must be installed approximately in the center.

From a width of six fans, a corresponding number of additional vertical struts must be installed. The struts can be attached to both the intake and the delivery side. The trim between the fans and the wall or ceiling (as bulkhead) must not be used as a supporting element.

EC centrifugal module - RadiPac

backward-curved, single-intake
with cube design

Connection diagram

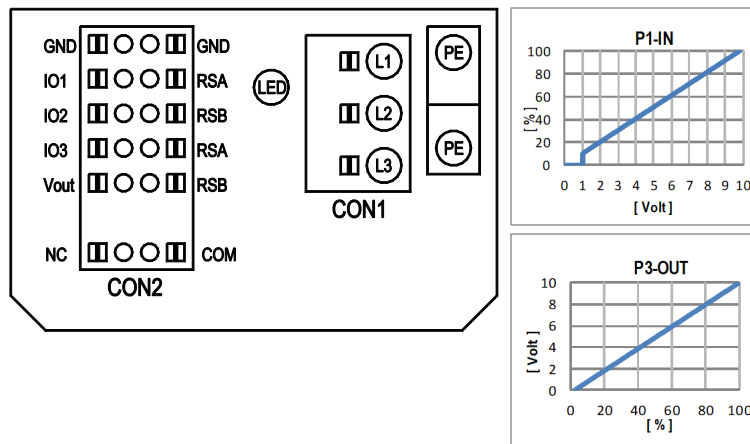


No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Actual speed Characteristic curve parametrizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment

configurable option		For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.4		configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	electrical specification	configurable IO mode	CON2	OUTPUT															
									INPUT															
IO1	○ Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D158 [0]	○	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [10]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]	signal: system modulation level %	D130 [5]	signal: remote control output 0-10V	D130 [4]	pulse output for auto-addressing	D130 [1]						
	○ Ain1 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV	D158 [2]	○	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: tach out	(selected directly via IO mode)	D130 [0]	signal: diagnostics out	D130 [10]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]	signal: system modulation level %	D130 [5]					
	○ Tach out (open collector output)	U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [5]	○	switch: parameter set: #1 / #2	D104 [...]	source: sensor value	D147 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]	signal: system modulation level %	D130 [5]				
	○ Diagnostics out (open collector output)	U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [6]	○	source: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: tach out	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]			
IO2	○ Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D159 [0]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ Ain2 0-10V/PWM: analog input	RI = 100k, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV	D159 [2]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV	D159 [3]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1.5VDC	D15A [0]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
IO3	○ Din3 (active low): digital input	active: applied voltage < 1.5VDC, SELV not active: pin open or applied voltage < 1.5VDC	D15A [1]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ PWMIn3: digital input idle level high	PWM = 40Hz - 10kHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	D15A [7]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ PWMIn3: digital input idle level low	40Hz - 10kHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	D15A [8]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ Aout3 0-10V: analog output	function parameterizable, max. 5mA max output frequency 300Hz, SELV	D15A [4]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
RSA RSB	○ Tacho out (pulses), analog output	0-10V max. 5mA max output frequency 300Hz, SELV	D15A [5]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ Diagnostics out (pulses)	0-10V max. 5mA max output frequency 300Hz, SELV	D15A [6]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ RS485 bus connection,	MODBUS RTU, specification V6.4, SELV		○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
	○ voltage output	voltage parameterizable 3.3...24VDC +/- 5%, P _{max} =800mW, short-circuit-proof, supply for external devices, SELV	D16E [...]	○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		
Vout	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...50VDC		○	switch: set value	D101 [...]	source: sensor value	D147 [...]	switch: parameter set: #1 / #2	D104 [...]	switch: control function: heating (pos.) / cooling (neg.)	D148 [...]	switch: direction of rotation: cw / ccw	D16C [...]	switch: fan enable / disable	D16A [...]	(selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [11]	signal: actual speed	D130 [12]		

Curves: Air performance 50 Hz

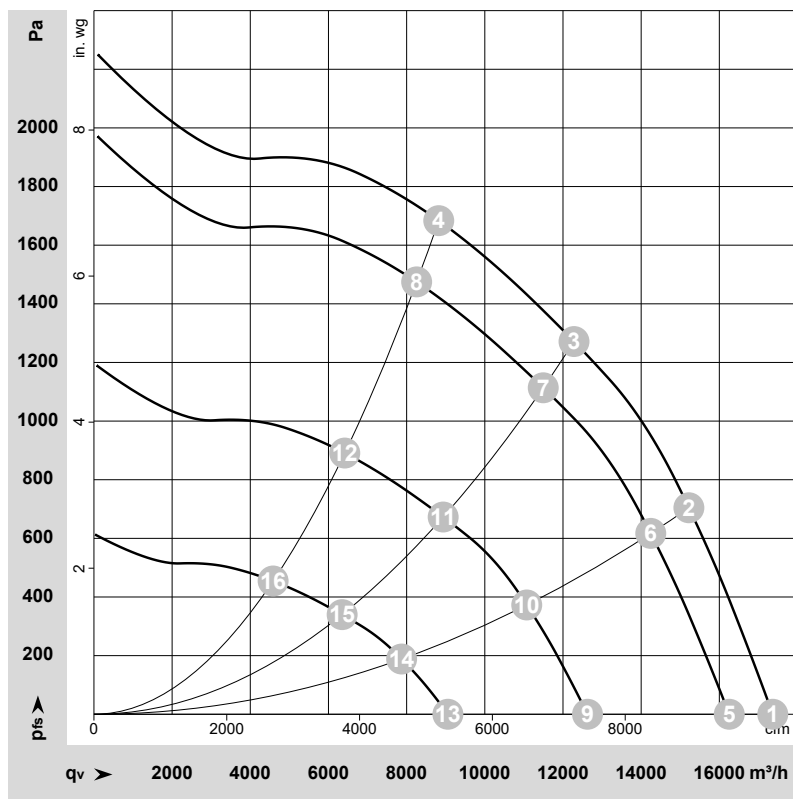

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-215273-1
Date: 2021-06-21
Nozzle: 8217101923

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	2840	3944	6.19	89	97	100	102	17365	0	10220	0.00
2	3~	400	50	2840	5454	8.43	84	92	95	97	15220	700	8960	2.81
3	3~	400	50	2840	6210	9.60	80	88	92	93	12280	1275	7230	5.12
4	3~	400	50	2840	6108	9.38	79	86	92	93	8820	1680	5190	6.74
5	3~	400	50	2660	3234	5.18	87	95	99	100	16255	0	9565	0.00
6	3~	400	50	2660	4476	7.00	82	90	94	95	14245	618	8385	2.48
7	3~	400	50	2660	4976	7.72	79	86	90	92	11495	1118	6765	4.49
8	3~	400	50	2660	5013	7.78	78	84	90	91	8255	1475	4860	5.92
9	3~	400	50	2065	1603	2.89	81	89	92	94	12630	0	7435	0.00
10	3~	400	50	2065	2174	3.67	76	84	87	89	11075	374	6515	1.50
11	3~	400	50	2065	2403	3.99	72	80	84	85	8935	675	5260	2.71
12	3~	400	50	2065	2420	4.02	71	78	84	85	6415	891	3775	3.58
13	3~	400	50	1480	698	1.64	73	82	85	87	9055	0	5330	0.00
14	3~	400	50	1475	887	1.93	68	76	80	81	7870	189	4635	0.76
15	3~	400	50	1475	961	2.04	63	71	76	77	6350	341	3735	1.37
16	3~	400	50	1475	976	2.06	60	68	74	75	4585	455	2700	1.83

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase