

8300101232
VWT0500CSLFS

EC axial panel fan - AxiEco

Fan housing with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101232	
Motor	E06003-30	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	400
Power consumption	W	29
Current draw	A	0.27
Max. back pressure	Pa	19
Max. back pressure	in. wg	0.08
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

8300101232
VWT0500CSLFS

EC axial panel fan - AxiEco

Fan housing with guard grille


Technical description

Size	500 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Comment on CE	Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.

EC axial panel fan - AxiEco

Fan housing with guard grille

Product drawing

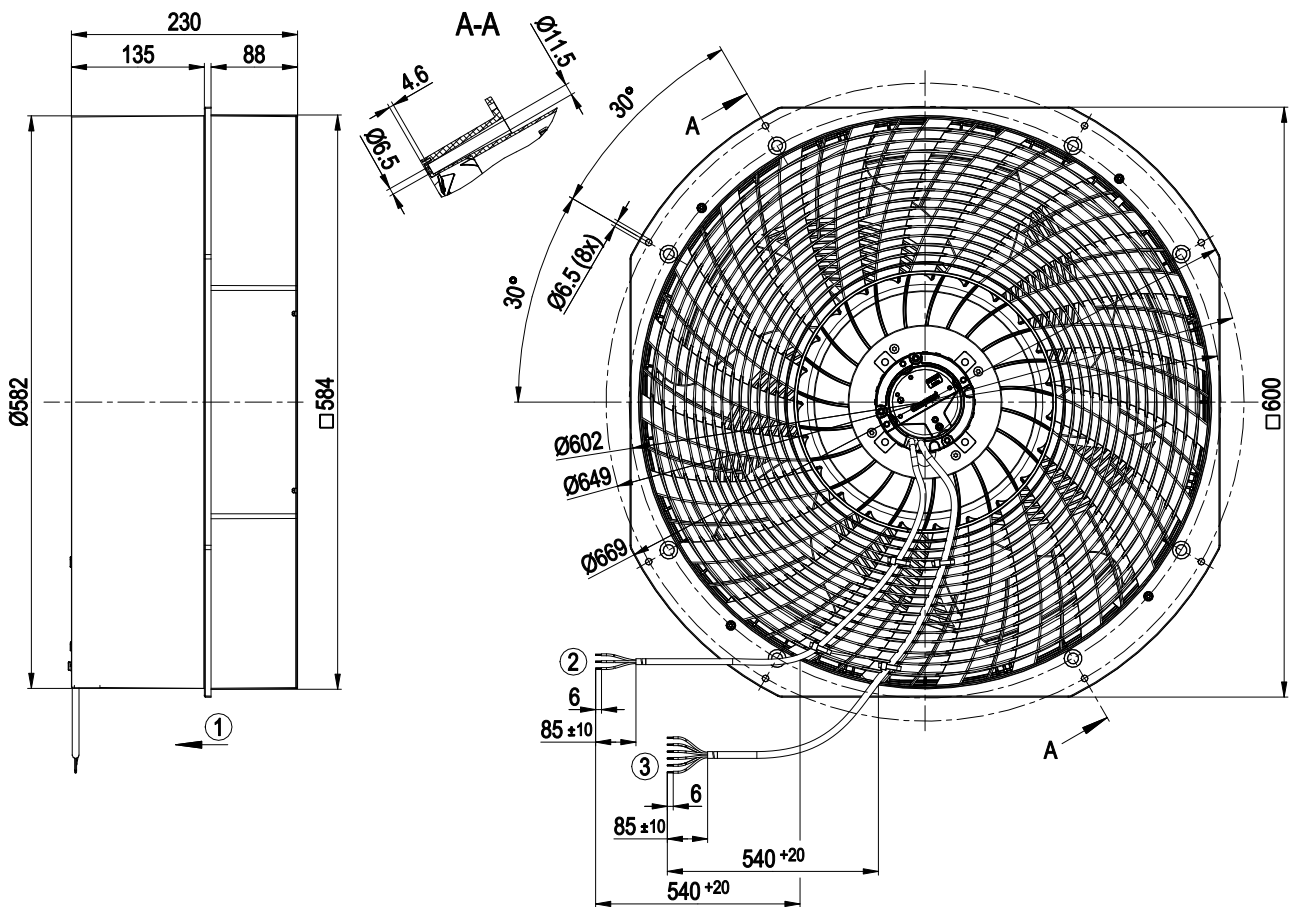


1	Airflow direction "V"
2	Supply line (PWR) PVC AWG20
	3x splice
3	Control wire (CTRL) PVC AWG22
	6x splice
	Accessory part: Guard grill 50070-2-4039 with oval head screw 60080-7-6201 (4x), can be fitted on the intake side. Not included in scope of delivery.
	The installation of accessories may change the air performance and noise values.

8300101232
VWT0500CSLFS

EC axial panel fan - AxiEco


Fan housing with guard grille

Accessory part

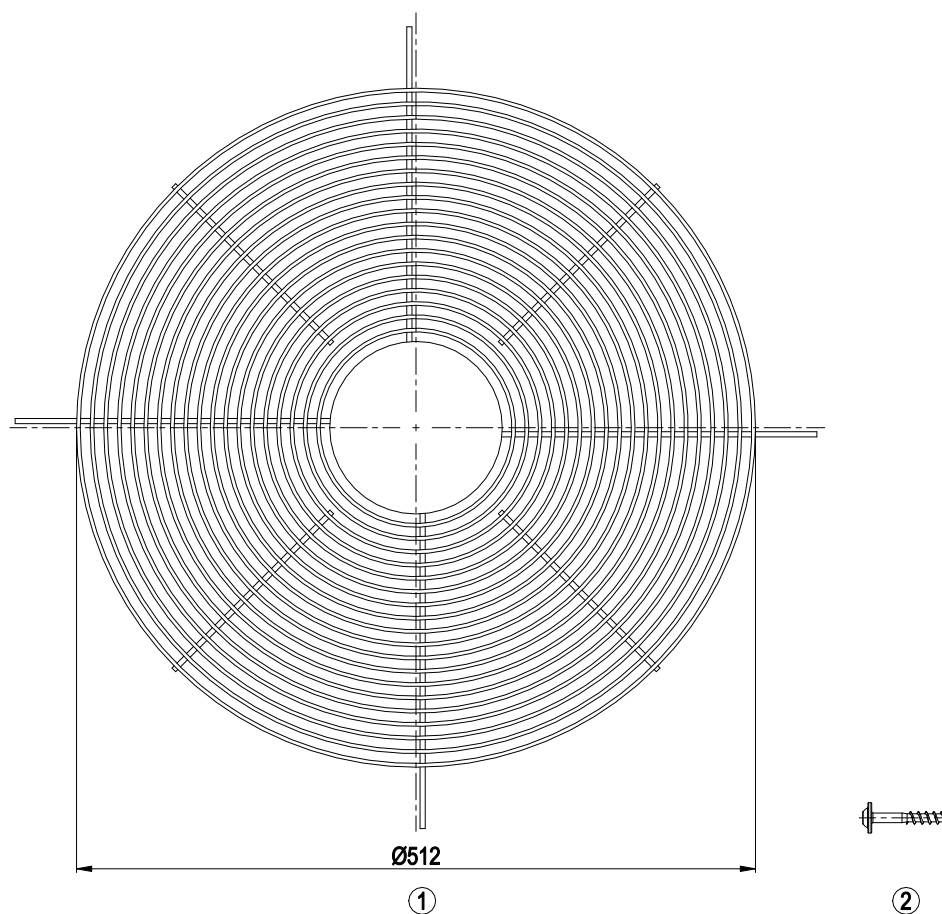

1	Guard grill 50070-2-4039
2	Oval head screw 60080-7-6201 (4x)

Mounting dimensions

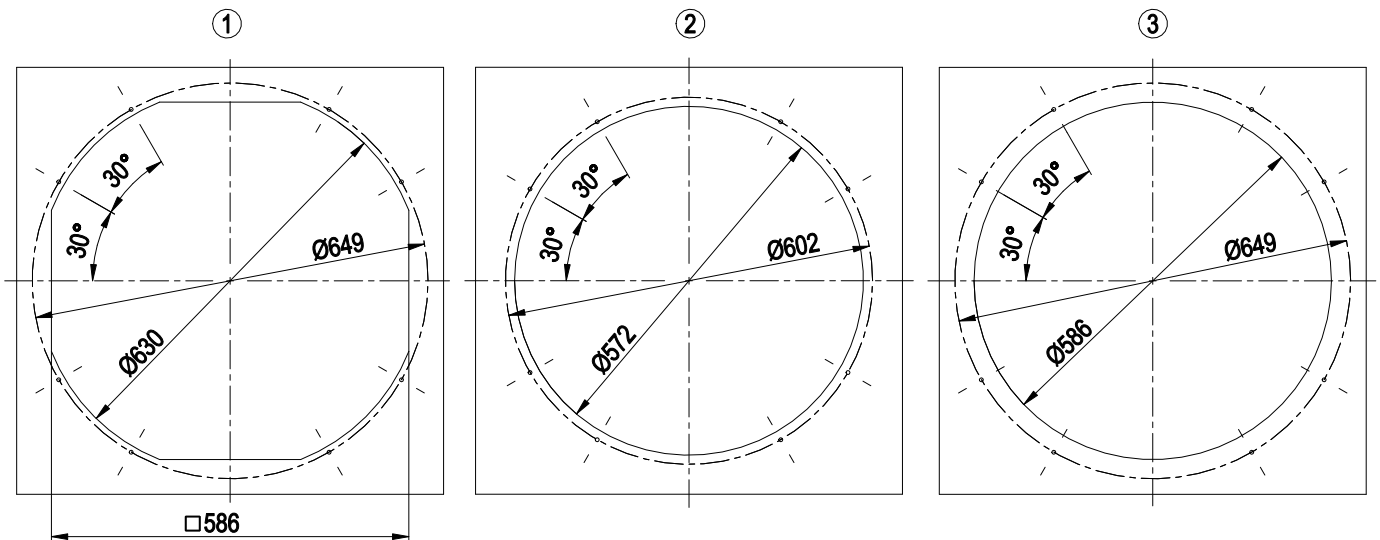

All 8 holes on the relevant pitch circle must always be used for all types of fastening.

1 intake-side mounting on flange

2 intake-side mounting on suction nozzle

The Ø6.5 mm holes must be pierced from the underside with a mandrel or similar tool.


We recommend using M6 cheese-head screws with hexagon socket (DIN 912/DIN EN ISO 4762) for fastening.

3 outlet-side mounting on flange

EC axial panel fan - AxiEco

Fan housing with guard grille

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function

VWT0500CSLFS

Fan housing with guard grille

Basic (B4)									
Factory configuration option upon request									
Factory configuration option									
IO1	configurable IO mode			electrical specification			INPUT		
							OUTPUT		
IO2	Dim1 (high active): digital input			active: parameterizable voltage x-30 VDC					
				not active: pin open or parameterizable voltage <x VDC, SELV					
	Ain1 0-10 V/PWM: analog input			Ri = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1k..10\text{ kHz}$, SELV					
	Tach out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
	Diagnostics out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
Vout	Alarm out (open collector)			Umax=50 VDC, Imax=10 mA, SELV					
	Open collector			Umax=50 VDC, Imax=10 mA, SELV					
	Voltage output			Voltage 10 VDC, SELV					


8300101232

VWT0500CSLFS

EC axial panel fan - AxiEco

Fan housing with guard grille

Curves: Air performance 50 Hz

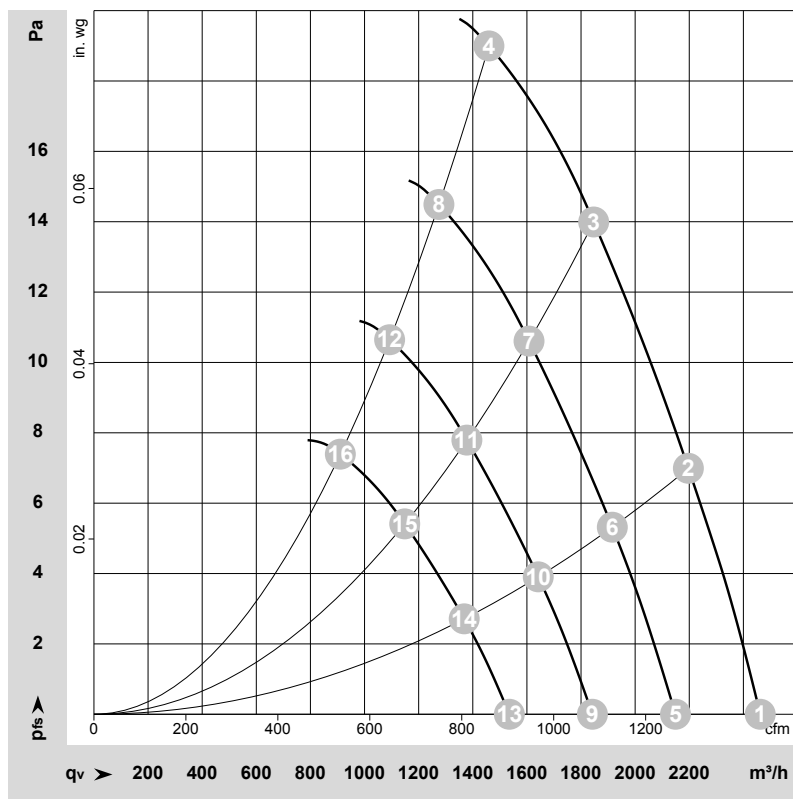

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-228115-1

Date: 2023-08-21

Nozzle: 50000-2-2943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	400	22	0.21	41	46	47	49	2460	0	1450	0.00
2	1~	230	50	400	25	0.23	39	44	46	48	2195	7	1295	0.03
3	1~	230	50	400	27	0.25	39	44	45	48	1845	14	1085	0.06
4	1~	230	50	400	29	0.27	38	44	45	47	1460	19	860	0.08
5	1~	230	50	350	15	0.14	37	42	43	46	2150	0	1265	0.00
6	1~	230	50	350	17	0.15	36	41	42	45	1915	5	1130	0.02
7	1~	230	50	350	18	0.17	35	40	42	44	1610	11	945	0.04
8	1~	230	50	350	19	0.18	35	41	41	44	1275	15	750	0.06
9	1~	230	50	300	9.3	0.09	33	39	40	42	1840	0	1085	0.00
10	1~	230	50	300	10	0.10	32	37	38	41	1640	4	965	0.02
11	1~	230	50	300	11	0.11	31	36	38	40	1380	8	810	0.03
12	1~	230	50	300	12	0.11	31	37	37	40	1095	11	645	0.04
13	1~	230	50	250	5.4	0.05	29	34	35	38	1535	0	905	0.00
14	1~	230	50	250	6.0	0.06	27	33	34	36	1370	3	805	0.01
15	1~	230	50	250	6.6	0.06	27	32	33	36	1150	5	675	0.02
16	1~	230	50	250	7.0	0.06	27	32	33	35	910	7	535	0.03

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase