

8300101327
VWT0400CSNFS

EC axial panel fan - AxiEco

Fan housing with guard grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101327	
Motor	E07433-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1320
Power consumption	W	165
Current draw	A	1.4
Max. back pressure	Pa	135
Max. back pressure	in. wg	0.54
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	52.6	28.7	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	2345
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	118
04 Efficiency grade N		63.9	40	10 Speed (rpm) n	min ⁻¹	1325
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-229368

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101327
VWT0400CSNFS

EC axial panel fan - AxiEco

Fan housing with guard grille


Technical description

Size	400 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Fan housing material	PP plastic
Number of blades	5
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Safety class of the permissible refrigerants according to EN378 / ISO5149-1	A3/B3
Maximum surface temperature	225 °C
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; EN 60335-2-40; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

EC axial panel fan - AxiEco

Fan housing with guard grille

Product drawing

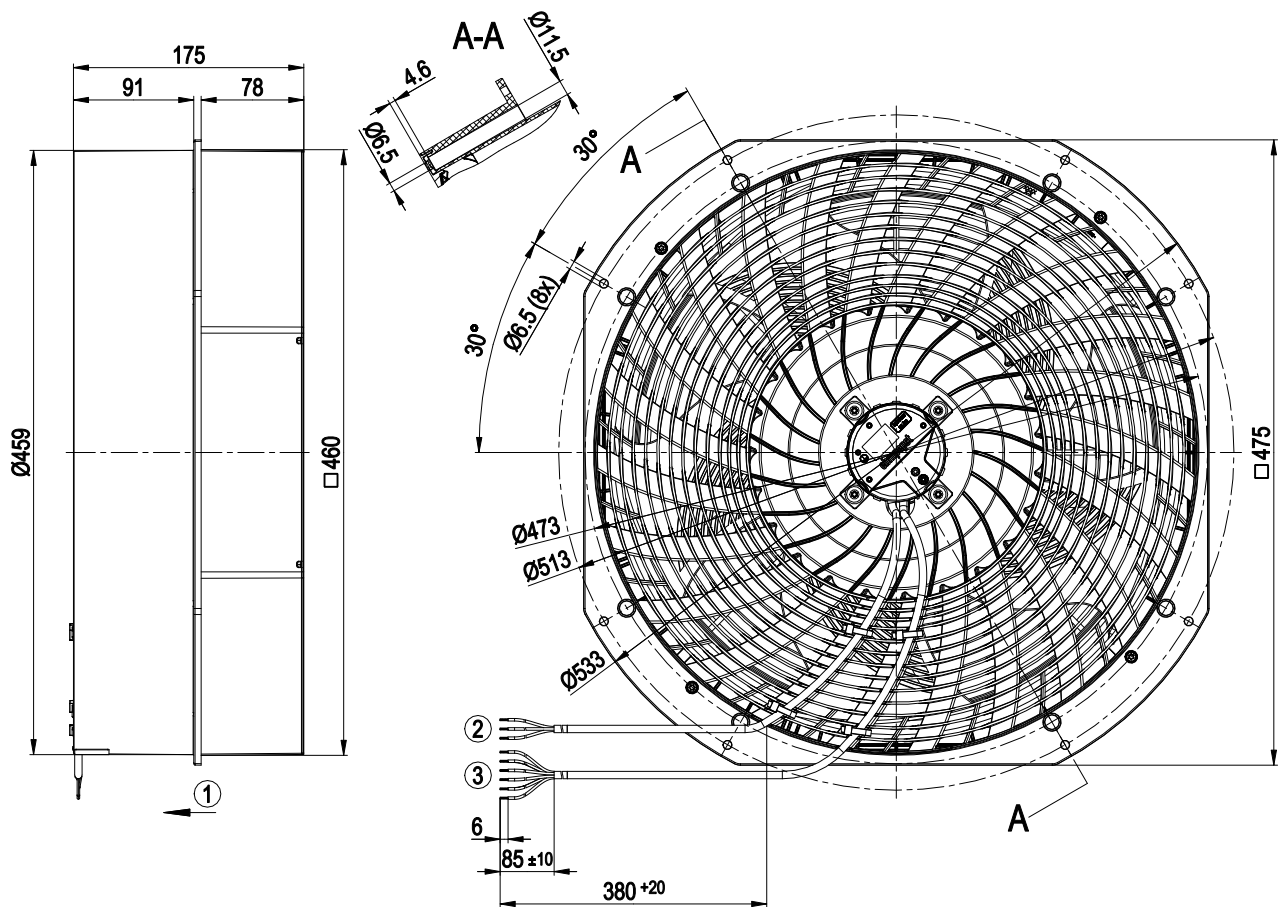


1	Airflow direction "V"
2	Supply line (PWR) PVC AWG20
	3x splice
3	Control wire (CTRL) PVC AWG22
	6x splice
	Accessory part: Guard grill 40070-2-4039 with oval head screw 60080-7-6201 (4x), can be fitted on the intake side. Not included in scope of delivery.
	The installation of accessories may change the air performance and noise values.

8300101327
VWT0400CSNFS

EC axial panel fan - AxiEco


Fan housing with guard grille

Accessory part

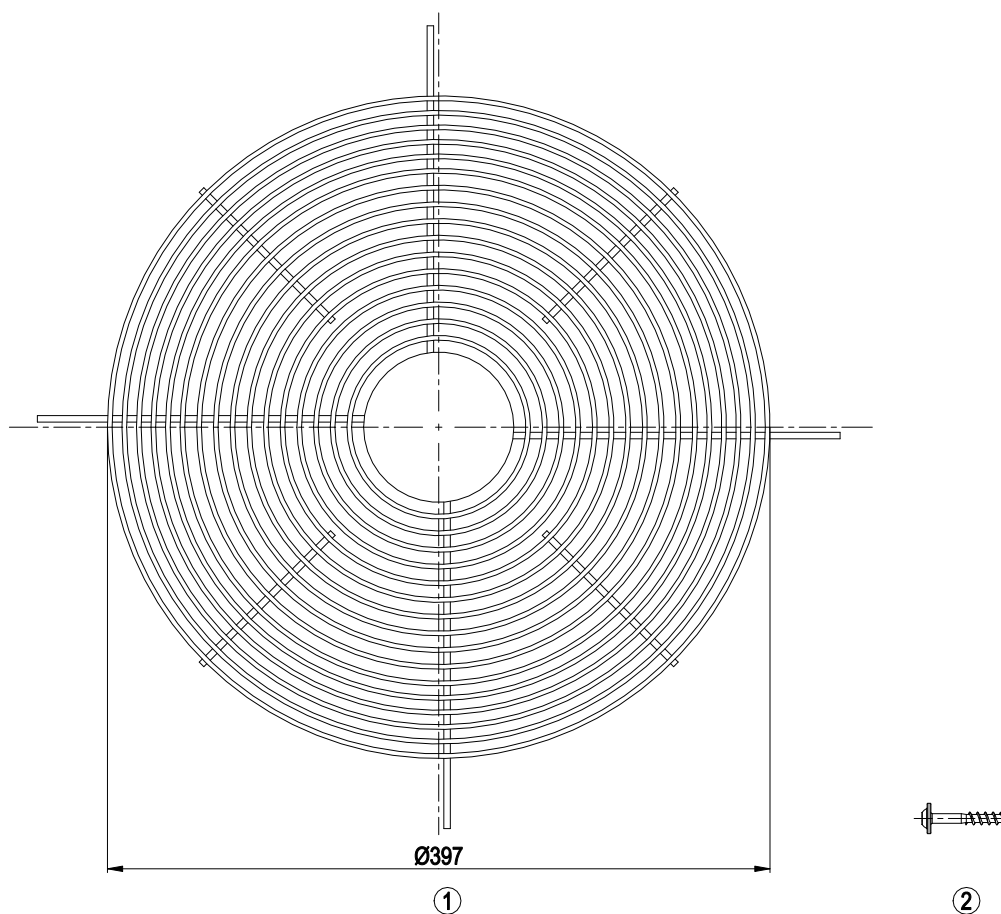

1	Guard grill 40070-2-4039
2	Oval head screw 60080-7-6201 (4x)

Mounting dimensions

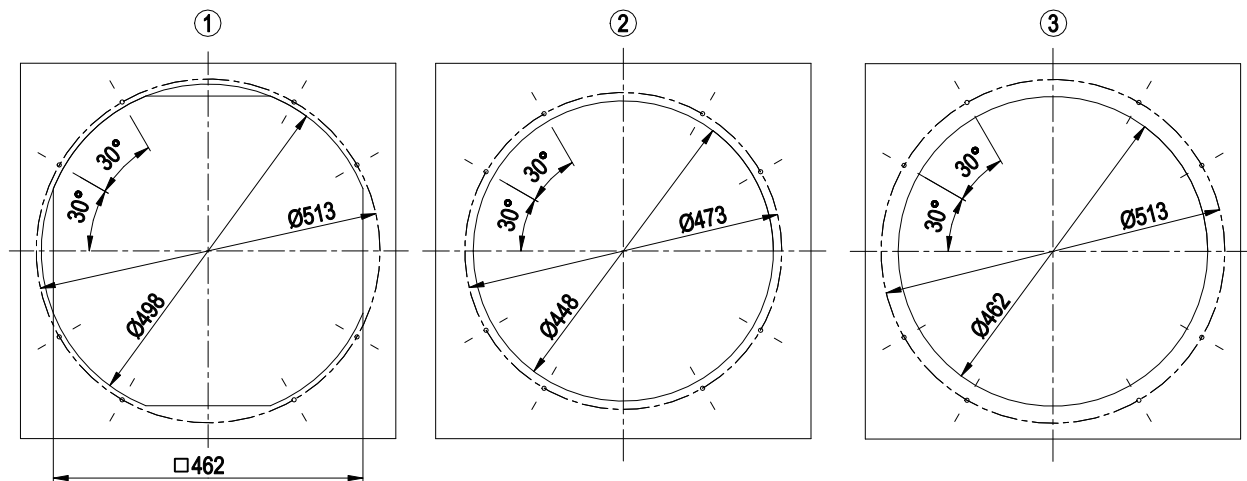

All 8 holes on the relevant pitch circle must always be used for all types of fastening.

1 intake-side mounting on flange

2 intake-side mounting on suction nozzle

The Ø6.5 mm holes must be pierced from the underside with a mandrel or similar tool.


We recommend using M6 cheese-head screws with hexagon socket (DIN 912/DIN EN ISO 4762) for fastening.

3 outlet-side mounting on flange

EC axial panel fan - AxiEco

Fan housing with guard grille

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function

EC axial panel fan - AxiEco

Fan housing with guard grille


Terminal/plug assignment

		electrical specification		configurable IO mode		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1k..10 kHz, SELV		Ain1 0-10 V/PWM: analog input		source: set value					
						switch: parameter set: #1 / #2					
						switch: direction of rotation: cw / ccw					
						switch: enable/disable input					
						configurable function					
IO2	Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector	U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV U _{max} =50 VDC, I _{max} =10 mA, SELV				signal: tach out					
						signal: diagnostics out					
						signal: alarm out					
						signal: run monitoring					
Vout	Voltage output	Voltage 10 VDC, SELV				signal: status					
						signal: configurable function					

Basic (B4)
Factory configuration option upon request

Factory configuration option

Curves: Air performance 50 Hz

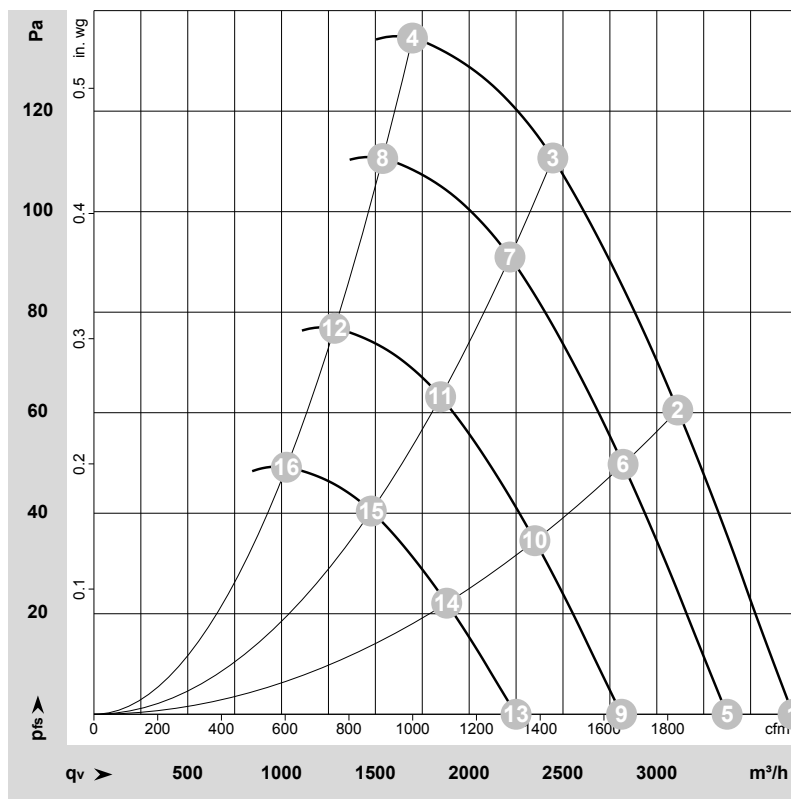

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-229368-1
Date: 2023-10-26
Nozzle: 40000-2-2943

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	1320	134	1.14	63	69	70	72	3725	0	2195	0.00
2	1~	230	50	1320	155	1.30	60	66	67	70	3110	60	1830	0.24
3	1~	230	50	1320	165	1.40	60	66	67	69	2445	110	1440	0.44
4	1~	230	50	1320	165	1.40	62	68	70	72	1700	135	1000	0.54
5	1~	230	50	1200	100	0.84	60	66	67	70	3375	0	1985	0.00
6	1~	230	50	1200	115	0.97	58	64	65	67	2820	50	1660	0.20
7	1~	230	50	1200	122	1.03	57	63	64	67	2215	91	1305	0.37
8	1~	230	50	1200	121	1.02	59	66	67	70	1540	111	905	0.45
9	1~	230	50	1000	58	0.49	56	62	63	65	2810	0	1655	0.00
10	1~	230	50	1000	67	0.56	53	59	60	63	2350	35	1385	0.14
11	1~	230	50	1000	71	0.59	53	59	60	62	1850	63	1090	0.25
12	1~	230	50	1000	70	0.59	55	61	62	65	1285	77	755	0.31
13	1~	230	50	800	30	0.25	50	56	57	60	2250	0	1325	0.00
14	1~	230	50	800	34	0.29	48	54	55	57	1880	22	1105	0.09
15	1~	230	50	800	36	0.30	47	53	54	57	1480	40	870	0.16
16	1~	230	50	800	36	0.30	49	56	57	59	1025	49	605	0.20

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase