

8300101356

VWB0450NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)

Fan housing with mounting grille

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101356	
Motor	E07433-43	

Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1050
Power consumption	W	170
Current draw	A	1.4
Max. back pressure	Pa	72
Max. back pressure	in. wg	0.29
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	40.6	28.8	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	3005
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	73
04 Efficiency grade N		51.8	40	10 Speed (rpm) n	min ⁻¹	1040
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-229883

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101356

VWB0450NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)

Fan housing with mounting grille

Technical description


Size	450 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Fan housing material	Sheet steel, galvanized and coated with black plastic (RAL 9005)
Support bracket material	Steel, coated with black plastic (RAL 9005)
Number of blades	3
Airflow direction	V
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	<p>I; If a protective earth is connected.</p> <p>The built-in component has several local protection class assignments.</p> <p>The final protection class is determined by the intended installation.</p>
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300101356
VWB0450NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)
Fan housing with mounting grille

Product drawing

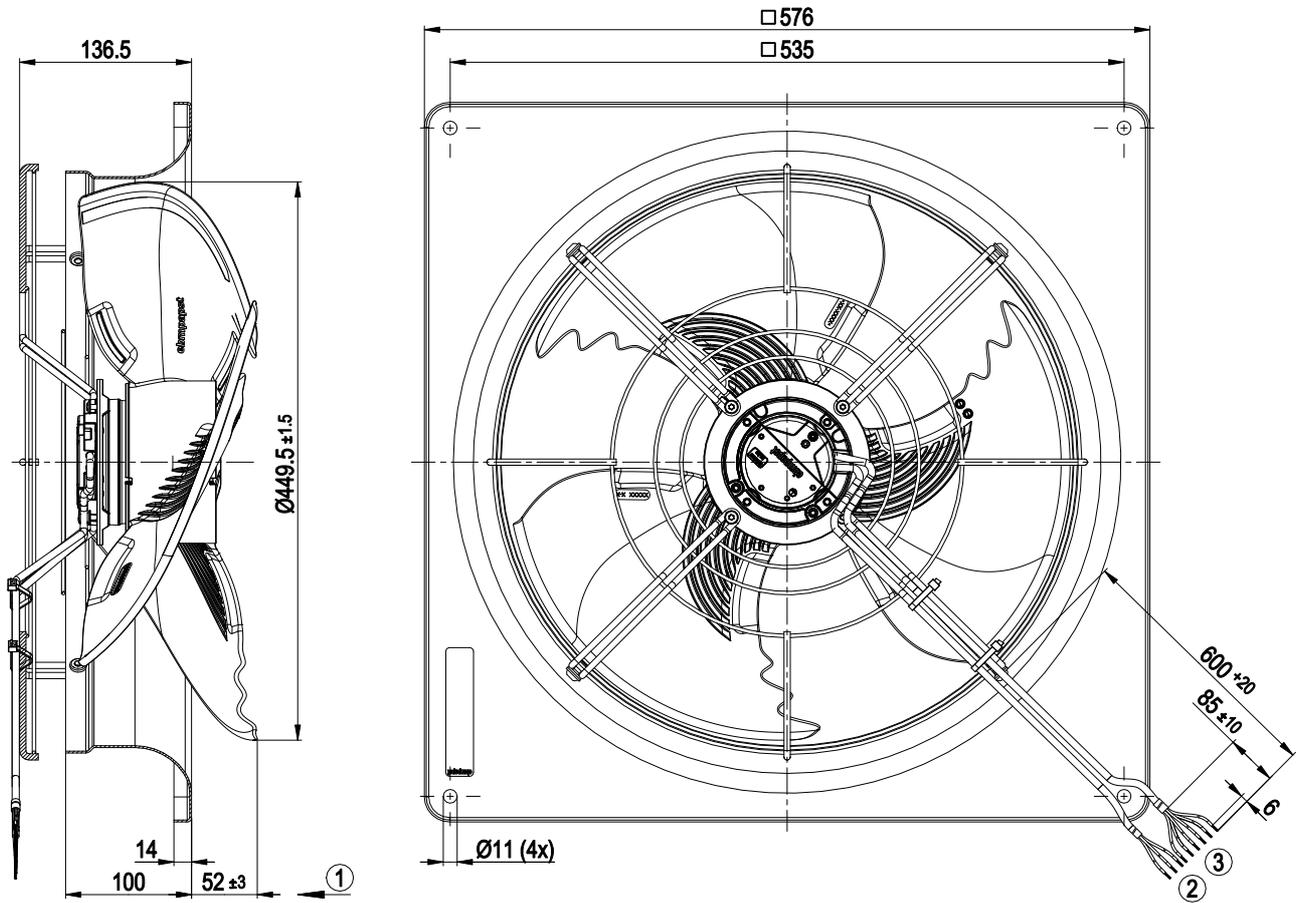


1	Airflow direction "V"
2	Supply line (PWR) PVC AWG20 3x splice
3	Control wire (CTRL) PVC AWG22 6x splice

8300101356
VWB0450NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)
Fan housing with mounting grille

Connection diagram

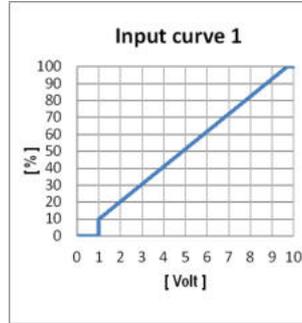

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, I _{max} = 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function

EC axial panel fan - AxiTone

sickle-shaped blades (S series)
Fan housing with mounting grille

Terminal/plug assignment

	configurable IO mode	electrical specification	INPUT	OUTPUT
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x-30 VDC not active: pin open or parameterizable voltage <x VDC, SELV	◦	
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{\text{PWM}} = 1\text{k}..10\text{kHz}$, SELV	◦	
IO2	◦ Tach out (open collector)	Umax=50 VDC, Imax=10 mA, SELV		◦
	◦ Diagnostics out (open collector)	Umax=50 VDC, Imax=10 mA, SELV		◦
	◦ Alarm out (open collector)	Umax=50 VDC, Imax=10 mA, SELV		◦
	◦ Open collector	Umax=50 VDC, Imax=10 mA, SELV		◦
Vout	Voltage output	Voltage 10 VDC, SELV		
			switch: parameter set: #1 / #2	signal: tach out
			switch: direction of rotation: cw / ccw	signal: diagnostics out
			switch: enable/disable input	signal: alarm out
			configurable function	signal: run monitoring
				signal: status
				signal: configurable function
			source: set value	


Basic (B4)
Factory configuration option upon request

◦ Factory configuration option

EC axial panel fan - AxiTone

sickle-shaped blades (S series)
Fan housing with mounting grille

Curves: Air performance 50 Hz

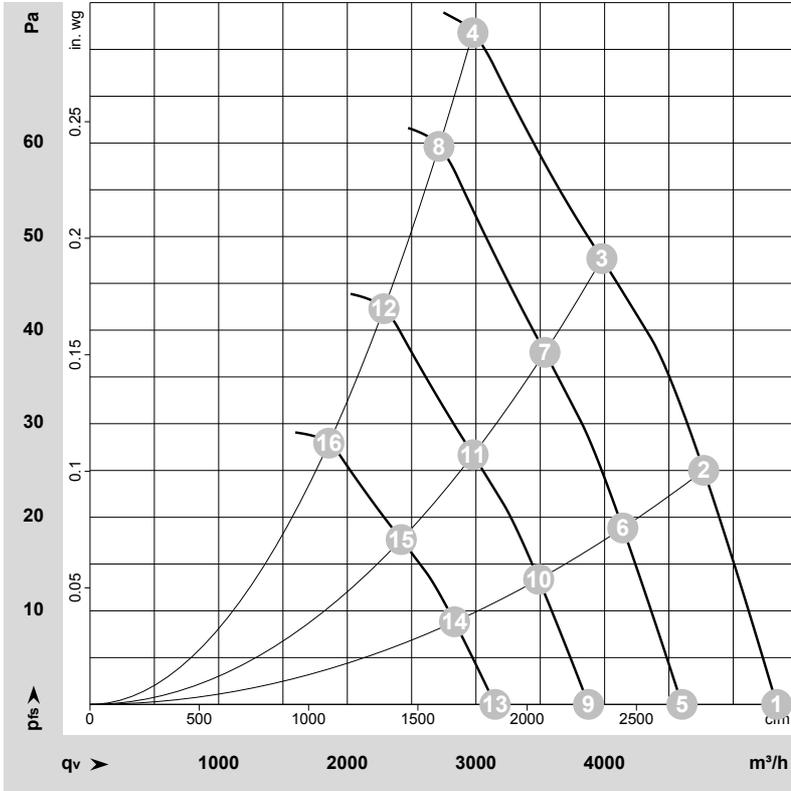

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-229883-1
Date: 2023-12-08
Housing: 64001-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1100	151	1.26	56	63	64	67	5340	0	3140	0.00
2	1~	230	50	1095	165	1.37	53	61	62	65	4770	25	2810	0.10
3	1~	230	50	1070	170	1.40	51	59	60	63	3980	48	2340	0.19
4	1~	230	50	1050	170	1.40	53	61	61	64	2975	72	1750	0.29
5	1~	230	50	950	97	0.81	52	59	60	63	4600	0	2710	0.00
6	1~	230	50	950	107	0.89	50	57	59	61	4140	20	2435	0.08
7	1~	230	50	950	118	0.98	48	56	57	60	3535	38	2080	0.15
8	1~	230	50	950	128	1.07	51	59	59	62	2715	60	1595	0.24
9	1~	230	50	800	58	0.48	47	55	56	58	3875	0	2280	0.00
10	1~	230	50	800	64	0.53	45	53	55	57	3490	14	2055	0.06
11	1~	230	50	800	70	0.59	43	51	53	55	2980	27	1755	0.11
12	1~	230	50	800	76	0.64	46	54	55	57	2285	43	1345	0.17
13	1~	230	50	650	31	0.26	42	49	51	53	3150	0	1855	0.00
14	1~	230	50	650	34	0.29	40	48	49	52	2835	9	1670	0.04
15	1~	230	50	650	38	0.31	38	46	48	50	2420	18	1425	0.07
16	1~	230	50	650	41	0.34	41	49	49	52	1855	28	1090	0.11

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase