

8300101404
VAY0500NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)

ebm-papst Mulfingen GmbH & Co. KG
Bachmühle 2 · D-74673 Mulfingen
Phone +49 7938 81-0
Fax +49 7938 81-110
info1@de.fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101404	
Motor	E07433-43	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	870
Power consumption	W	170
Current draw	A	1.4 (240V)
Max. back pressure	Pa	70
Max. back pressure	in. wg	0.28
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	43.4	28.8	09 Power consumption P_{ed}	kW	0.17
02 Measurement category		A		09 Air flow q_v	m ³ /h	3595
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	65
04 Efficiency grade N		54.6	40	10 Speed (rpm) n	min ⁻¹	880
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$ LU-233782

8300101404
VAY0500NSNJS

EC axial panel fan - AxiTone

sickle-shaped blades (S series)

Technical description


Size	500 mm
Motor size	74
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Number of blades	3
Airflow direction	A
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Locked-rotor detection - Tach output - Speed control - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; UKCA; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

8300101404
VAY0500NSNJS

EC axial panel fan - AxiTone


sickle-shaped blades (S series)

Product drawing

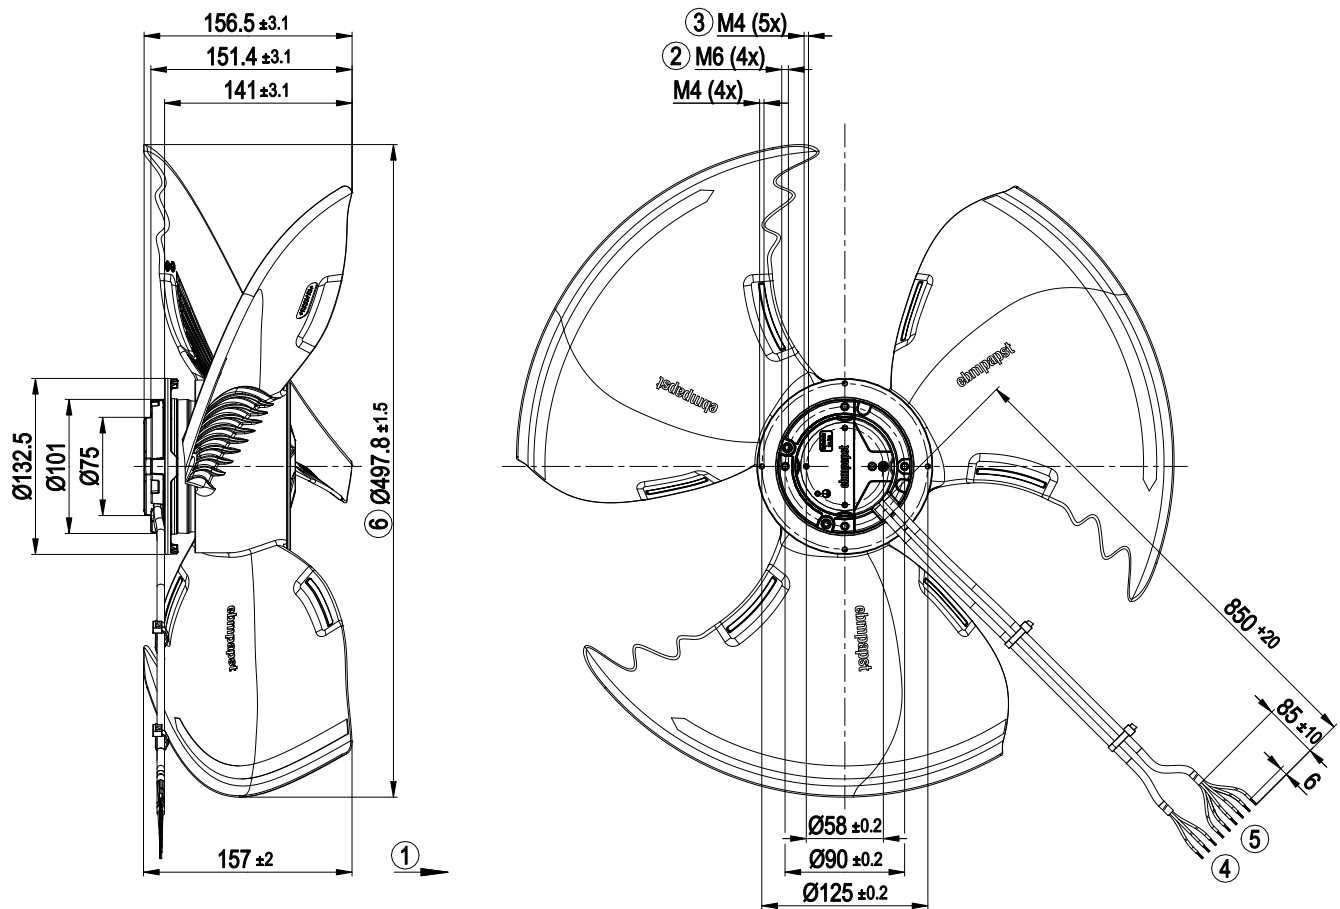

1	Direction of air flow "A"
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Cable PVC AWG20 (PWR)
	3x splice
5	Cable PVC AWG22 (CTRL)
	6x splice
6	The diameter of the impeller becomes larger than indicated on the drawing due to the centrifugal forces during operation. The dimension indicated refers to the condition on delivery.

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function


Terminal/plug assignment

		configurable IO mode		electrical specification		INPUT		OUTPUT			
IO1	Din1 (high active): digital input	Ain1 0-10 V/PWM: analog input	active: parameterizable voltage x -30 VDC not active: pin open or parameterizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parameterizable, f _{PWM} = 1 k - 10 kHz, SELV			switch: parameter set: #1 / #2	○	switch: enable/disable input	○	configurable function	
						switch: direction of rotation: cw / ccw	○			signal: tach out	
								signal: diagnostics out		signal: alarm out	
										signal: run monitoring	
										signal: status	
IO2	Tach out (open collector)	Diagnostics out (open collector)	U _{max} = 50 VDC, I _{max} = 10 mA, SELV								○
											○
											○
											○
Vout	Voltage output	Open collector	U _{max} = 50 VDC, I _{max} = 10 mA, SELV								

Basic (B4)
Factory configuration option upon request

○ factory configuration option

Curves: Air performance 50 Hz

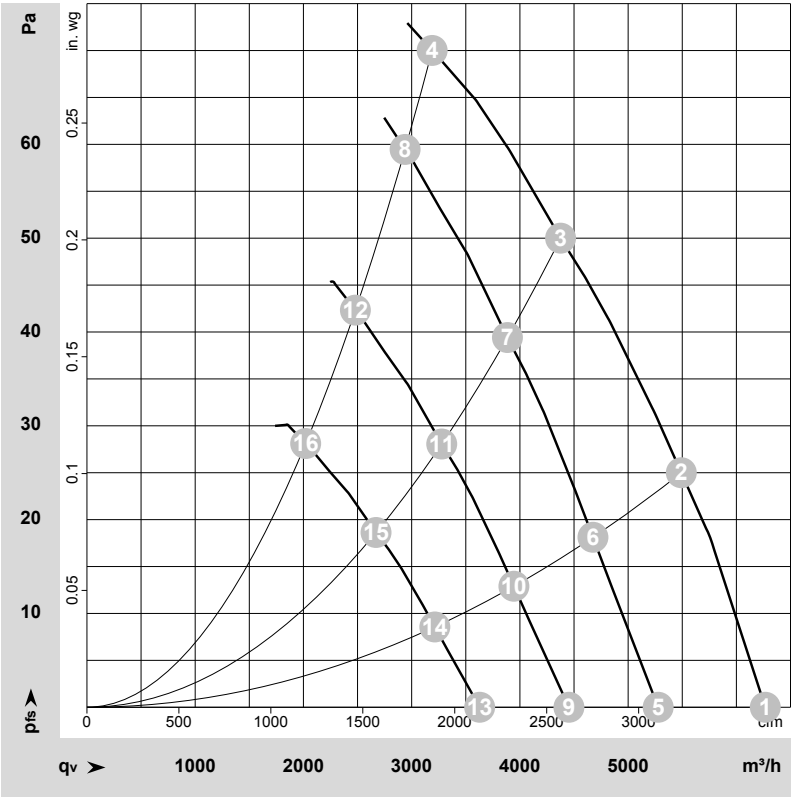

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-233782-1
Date: 2024-07-11
Housing: 10524-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	1~	230	50	950	150	1.26	55	60	59	63	6265	0	3690	0.00
2	1~	230	50	940	169	1.40	52	58	57	60	5490	25	3230	0.10
3	1~	230	50	900	170	1.40	47	54	54	57	4375	50	2575	0.20
4	1~	230	50	870	170	1.40	49	56	56	59	3190	70	1875	0.28
5	1~	230	50	800	90	0.75	50	56	55	59	5275	0	3105	0.00
6	1~	230	50	800	104	0.86	48	54	53	56	4675	18	2750	0.07
7	1~	230	50	800	119	0.98	44	51	51	54	3885	39	2285	0.16
8	1~	230	50	800	133	1.10	47	54	54	57	2940	59	1730	0.24
9	1~	230	50	675	54	0.45	46	52	51	54	4455	0	2620	0.00
10	1~	230	50	675	63	0.52	43	49	48	52	3945	13	2320	0.05
11	1~	230	50	675	72	0.59	40	46	46	49	3280	28	1930	0.11
12	1~	230	50	675	80	0.66	43	50	49	53	2480	42	1460	0.17
13	1~	230	50	550	29	0.24	41	47	46	49	3630	0	2135	0.00
14	1~	230	50	550	34	0.28	38	44	43	47	3215	9	1890	0.04
15	1~	230	50	550	39	0.32	35	41	41	44	2670	19	1570	0.08
16	1~	230	50	550	43	0.36	38	45	44	48	2020	28	1190	0.11

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase