

8300101712
VBS0280SSNDS

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101712	
Motor	E07433-18	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	2000
Power consumption	W	170
Current draw	A	1.4
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	70.7	43.3	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	1630
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	229
04 Efficiency grade N		89.4	62	10 Speed (rpm) n	min ⁻¹	2035
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-233570

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101712
VBS0280SSNDS

EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description


Size	280 mm
Motor size	74
Rotor surface	Galvanized
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none">- Output 10 VDC, max. 10 mA- Locked-rotor detection- Tach output- Speed control- Power limiter- Motor current limitation- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Lateral
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60335-1; EN 60034-1; EN 60204-1; UKCA; CE
Approval	UL 1004-7 + 60730-1; CSA C22.2 No. 77 + CAN/CSA-E60730-1

8300101712
VBS0280SSNDS

EC centrifugal fan - RadiCal

backward-curved, single-intake

Product drawing

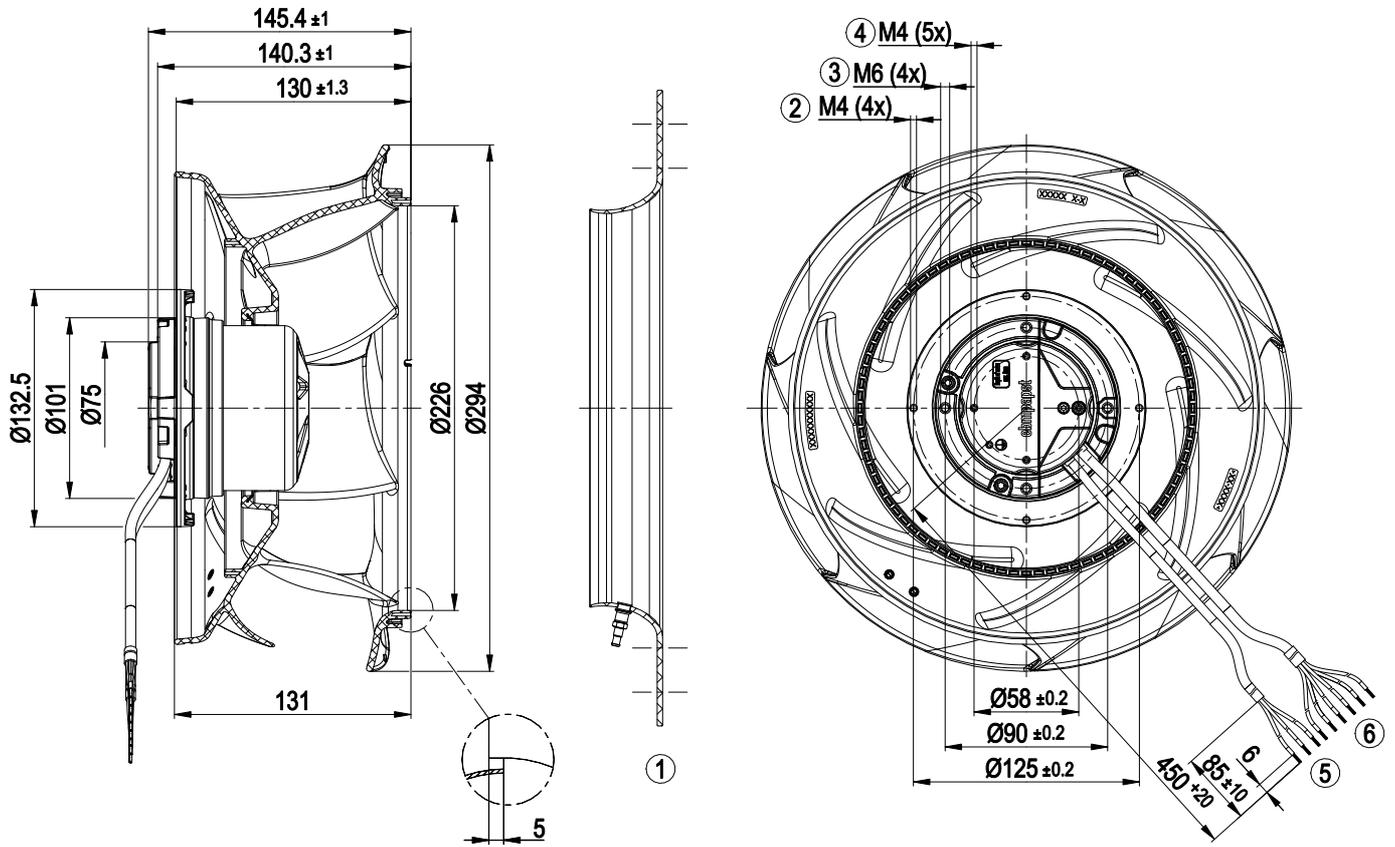


1	Inlet ring 8217102242 with pressure tap (k-factor: 115)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm
4	Max. clearance for screw 5 mm
5	Supply line (PWR) PVC AWG20 3x splice
6	Control wire (CTRL) PVC AWG22 6x splice

8300101712
VBS0280SSNDS

EC centrifugal fan - RadiCal


backward-curved, single-intake

Accessory part

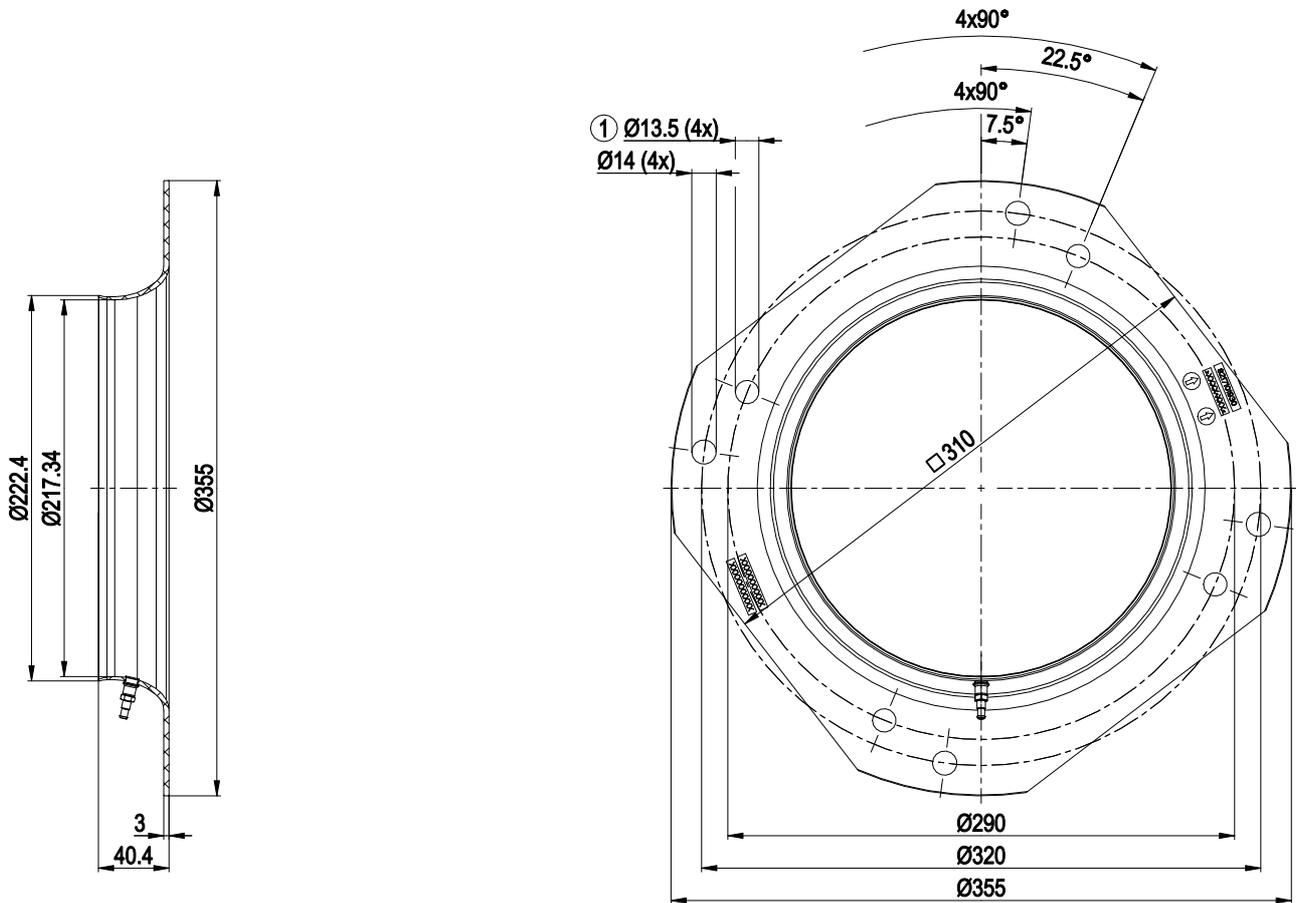

- | | |
|---|--|
| 1 | Fastening holes for FlowGrid 25310-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required |
| | Inlet ring 8217102242 with pressure tap (k-factor: 115) |

Connection diagram

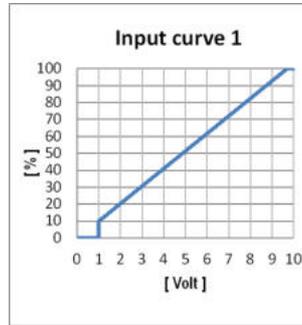

No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV
	CTRL	-	gray	No function
	CTRL	-	brown	No function


Terminal/plug assignment

	configurable IO mode	electrical specification			
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x -30 VDC not active: pin open or parameterizable voltage < x VDC, SELV			
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{pwm} = 1 \text{ k} - 10 \text{ kHz}$, SELV			
IO2	◦ Tach out (open collector)	Umax = 50 VDC, Imax = 10 mA, SELV		◦	
	◦ Diagnostics out (open collector)	Umax = 50 VDC, Imax = 10 mA, SELV		◦	
	◦ Alarm out (open collector)	Umax = 50 VDC, Imax = 10 mA, SELV		◦	
Vout	◦ Open collector	Umax = 50 VDC, Imax = 10 mA, SELV			
	Voltage output	Voltage 10 VDC, SELV			
			source: set value		
			switch: parameter set: #1 / #2	INPUT	
			switch: direction of rotation: cw / ccw	INPUT	
			switch: enable/disable input		
			configurable function		
			signal: tach out		◦
			signal: diagnostics out		◦
			signal: alarm out	OUTPUT	
			signal: run monitoring		◦
			signal: status		◦
			signal: configurable function		◦

Basic (B4)
Factory configuration option upon request

◦ factory configuration option

Curves: Air performance 50 Hz

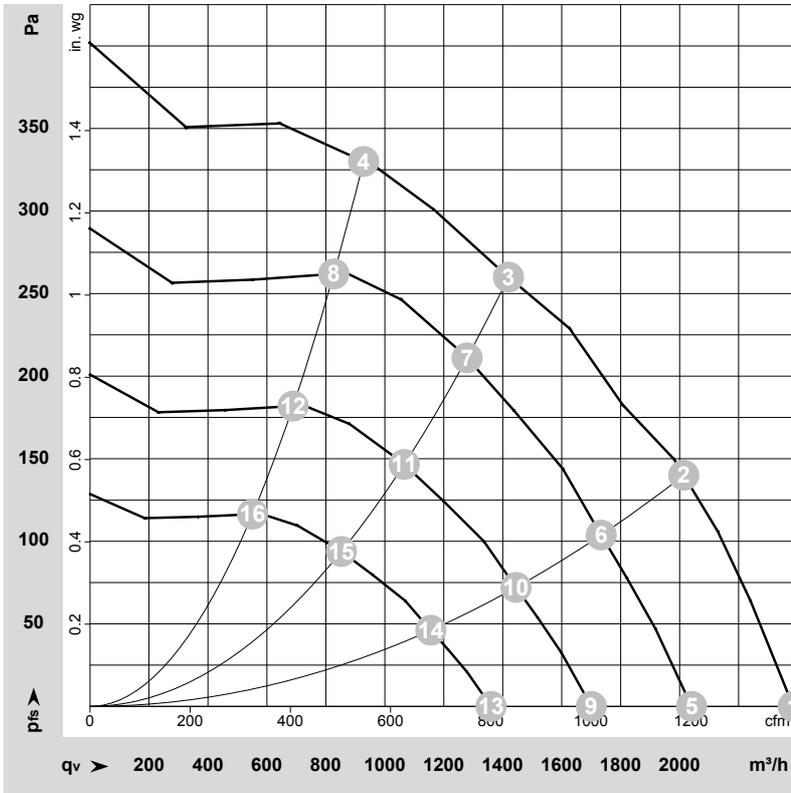

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-233570-1
Date: 2024-09-09
Nozzle: 8217101930

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	2105	111	0.94	67	74	2385	0	1405	0.00
2	1~	230	50	2090	164	1.36	62	69	2015	140	1185	0.56
3	1~	230	50	2000	167	1.38	56	63	1420	260	835	1.04
4	1~	230	50	2020	167	1.38	60	68	930	330	545	1.32
5	1~	230	50	1800	69	0.59	63	70	2040	0	1200	0.00
6	1~	230	50	1800	105	0.87	58	66	1735	104	1020	0.42
7	1~	230	50	1800	122	1.01	53	61	1280	211	755	0.85
8	1~	230	50	1800	118	0.98	57	65	825	262	485	1.05
9	1~	230	50	1500	40	0.34	59	66	1700	0	1000	0.00
10	1~	230	50	1500	61	0.50	54	61	1445	72	850	0.29
11	1~	230	50	1500	71	0.59	49	56	1065	147	625	0.59
12	1~	230	50	1500	68	0.57	52	60	690	182	405	0.73
13	1~	230	50	1200	21	0.17	53	60	1360	0	800	0.00
14	1~	230	50	1200	31	0.26	48	55	1155	46	680	0.18
15	1~	230	50	1200	36	0.30	43	51	855	94	500	0.38
16	1~	230	50	1200	35	0.29	47	55	550	116	325	0.47

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · P_{fs} = Pressure increase