

8300101789
VFS0160XSLFZ

EC centrifugal fan

forward-curved, single-intake

8300101789 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Item	8300101789	
Motor	E06003-30	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	3000
Power consumption	W	170
Current draw	A	1.4
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	44.2	32.8	09 Power consumption P_{ed}	kW	0.16
02 Measurement category		A		09 Air flow q_v	m ³ /h	385
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	609
04 Efficiency grade N		55.4	44	10 Speed (rpm) n	min ⁻¹	2990
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-235347

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101789
VFS0160XSLFZ

EC centrifugal fan

forward-curved, single-intake

Technical description


Size	160 mm
Motor size	60
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none">- Output 10 VDC, max. 10 mA- Locked-rotor detection- Tach output- Speed control- Power limiter- Motor current limitation- Soft start- Control input 0-10 VDC / PWM- Control interface with SELV potential safely disconnected from the mains- Overvoltage detection- Thermal overload protection for electronics/motor- Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Motor protection	Electronic motor protection
With cable	Variable
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE

8300101789
VFS0160XSLFZ

EC centrifugal fan

forward-curved, single-intake

Product drawing

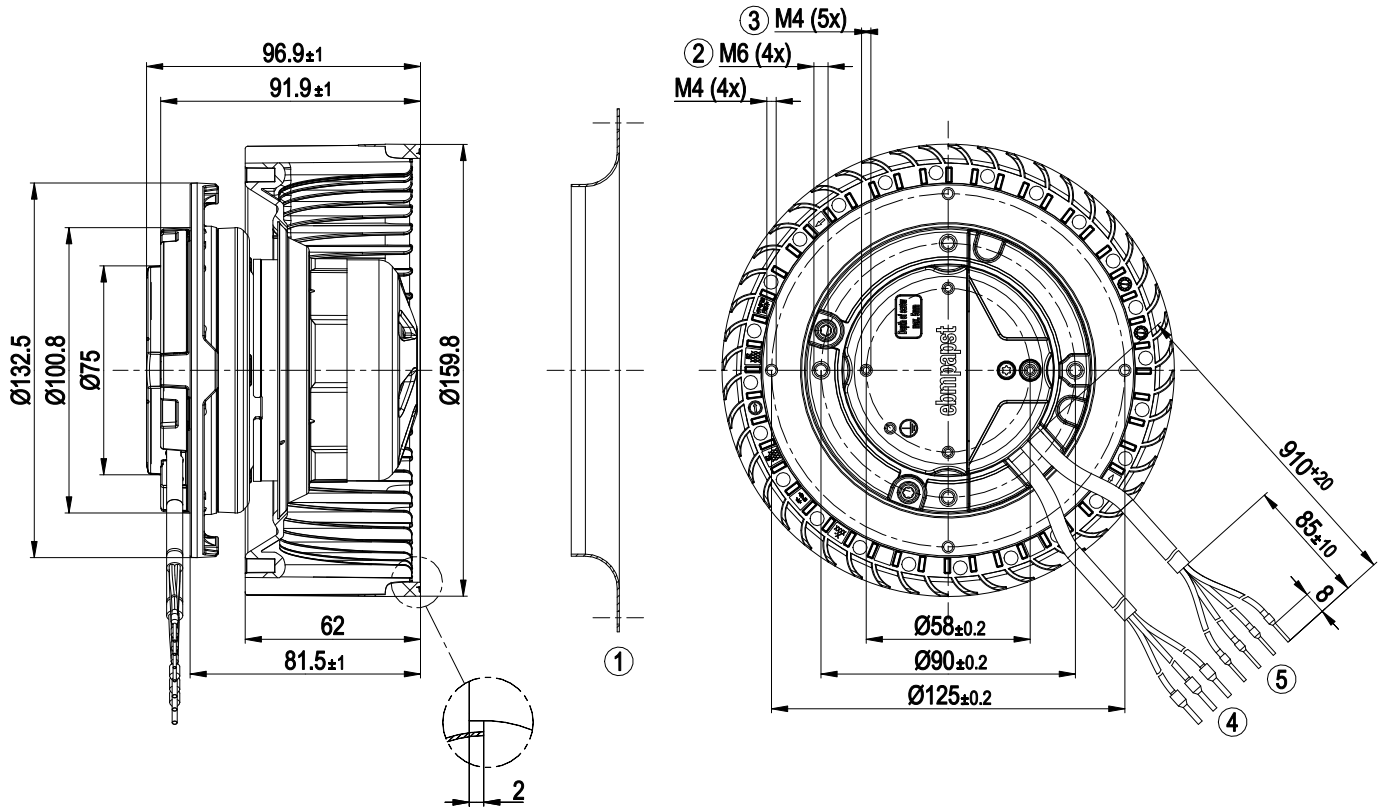


1	Accessory part: Inlet ring 09588-2-4013 (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 5 mm
4	Supply line (PWR) PVC AWG20 3x wire-end ferrule
5	Control wire (CTRL) PVC AWG22 4x wire-end ferrule

8300101789
VFS0160XSLFZ

EC centrifugal fan


forward-curved, single-intake

Accessory part

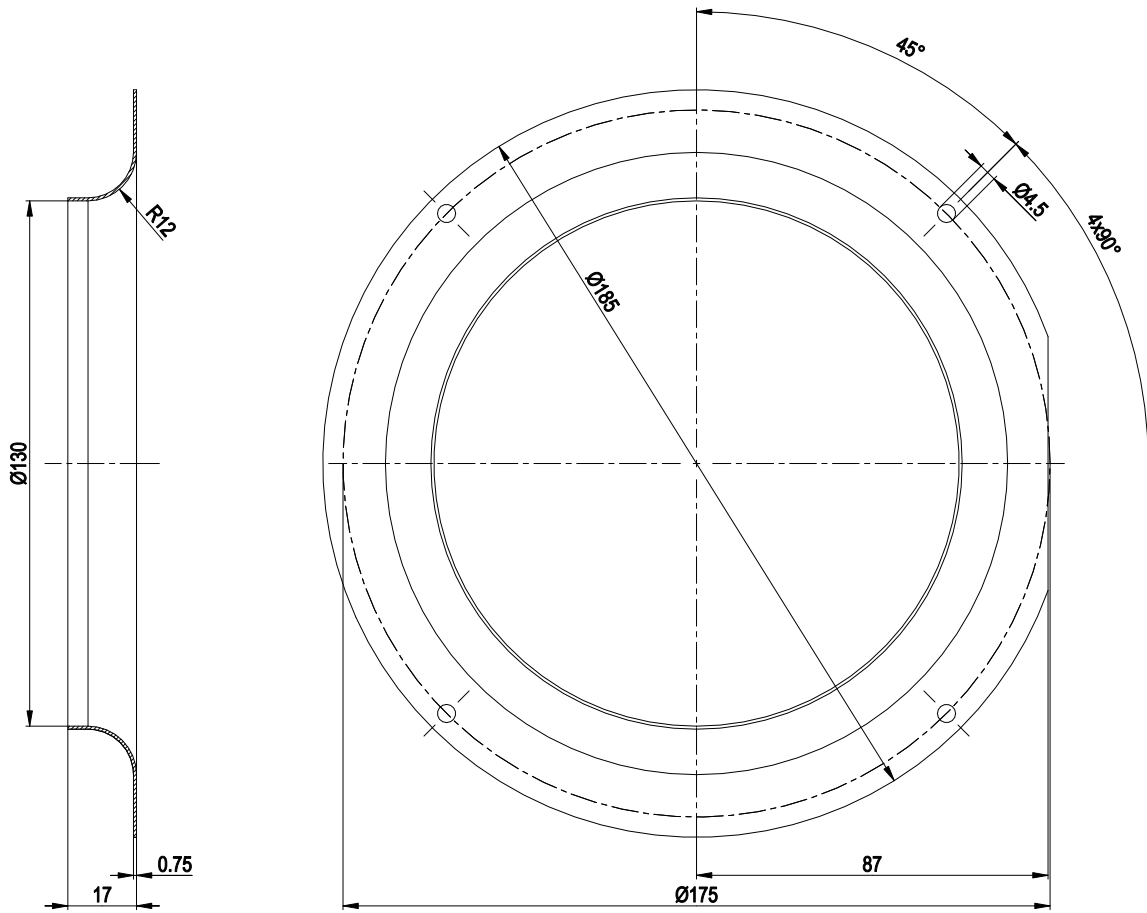

Inlet ring 09588-2-4013

Connection diagram



No.	Conn.	Designation	Color	Function/assignment
	PWR	L	black	Power supply, phase, see nameplate for voltage range
	PWR	N	blue	Power supply, neutral conductor, see nameplate for voltage range
	PWR	PE	green/yellow	Protective earth
	CTRL	GND	blue	Reference ground for control interface, SELV
	CTRL	IO1	yellow	Factory setting: Analog input 0-10 V/PWM, Ri=100 KΩ, fPWM=1 kHz..10 kHz, Function: Speed set value Characteristic curve parameterizable (see "Input curve 1"), SELV Function parameterizable at the factory (see Optional interface functions table)
	CTRL	IO2	white	Factory setting: Open collector output, Umax=50 VDC, Imax= 10 mA, function: Tach output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)
	CTRL	Vout	red	Voltage output 10 VDC +/-3%, Imax=10 mA Short-circuit-proof, power supply for external devices, SELV

Terminal/plug assignment

	configurable IO mode	electrical specification			
IO1	◦ Din1 (high active): digital input	active: parameterizable voltage x - 30 VDC not active: pin open or parameterizable voltage < x VDC, SELV			
	◦ Ain1 0-10 V/PWM: analog input	RI = 100 kΩ, characteristic curve parameterizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$, SELV			
IO2	◦ Tach out (open collector)	U _{max} = 50 VDC, I _{max} = 10 mA, SELV			◦
	◦ Diagnostics out (open collector)	U _{max} = 50 VDC, I _{max} = 10 mA, SELV		◦	◦
	◦ Alarm out (open collector)	U _{max} = 50 VDC, I _{max} = 10 mA, SELV			◦
Vout	◦ Open collector	U _{max} = 50 VDC, I _{max} = 10 mA, SELV			◦
	Voltage output	Voltage 10 VDC, SELV			
			source: set value		
			switch: parameter set: #1 / #2	INPUT	
			switch: direction of rotation: cw / ccw		
			switch: enable/disable input		
			configurable function		
			signal: tach out		◦
			signal: diagnostics out		◦
			signal: alarm out	OUTPUT	◦
			signal: run monitoring		◦
			signal: status		◦
			signal: configurable function		◦

Basic (B4)
Factory configuration option upon request


- factory configuration option

8300101789
VFS0160XSLFZ

EC centrifugal fan

forward-curved, single-intake

Curves: Air performance 50 Hz

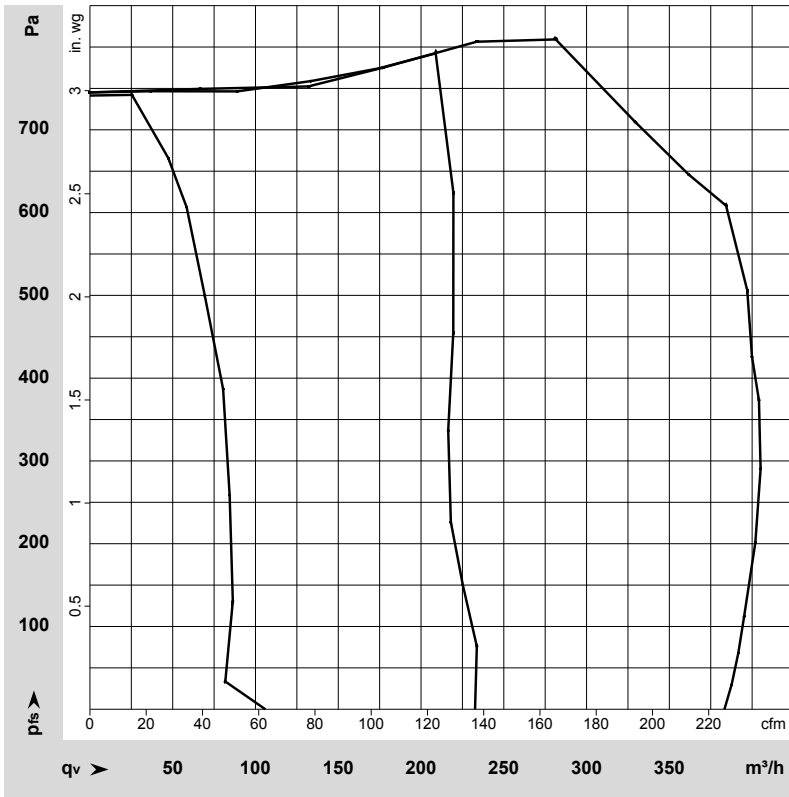

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-235347-1
Date: 2025-03-11

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.