

8300101860
VBS0280SSPFZ

EC centrifugal fan - RadiCal

backward-curved, single-intake

8300101860 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRA 590344
General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen
Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

Item	8300101860	
Motor	E09003-28	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	3180
Power consumption	W	660
Current draw	A	2.8
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	73.1	49.1	09 Power consumption P_{ed}	kW	0.59
02 Measurement category		A		09 Air flow q_v	m ³ /h	2655
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	535
04 Efficiency grade N		86	62	10 Speed (rpm) n	min ⁻¹	3180
05 Variable speed drive		Yes		11 Specific ratio [*]		1.01

Data obtained at optimum efficiency level.

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-236161

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).
The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.
The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

8300101860
VBS0280SSPFZ


EC centrifugal fan - RadiCal

backward-curved, single-intake

Technical description

Size	280 mm
Motor size	90
Rotor surface	Painted black
Terminal box material	PA plastic
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none">- Locked-rotor detection- Speed control- Alarm relay- Power limiter- Motor current limitation- PFC, active- Soft start- Control interface with SELV potential safely disconnected from the mains- Temperature derating- Thermal overload protection for electronics/motor- Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection
Protection class assignment	I; If a protective earth is connected. The built-in component has several local protection class assignments. The final protection class is determined by the intended installation.
Conformity with standards	EN 61800-5-1; CE
Approval	61800-5-1; CSA C22.2 No. 77

Product drawing

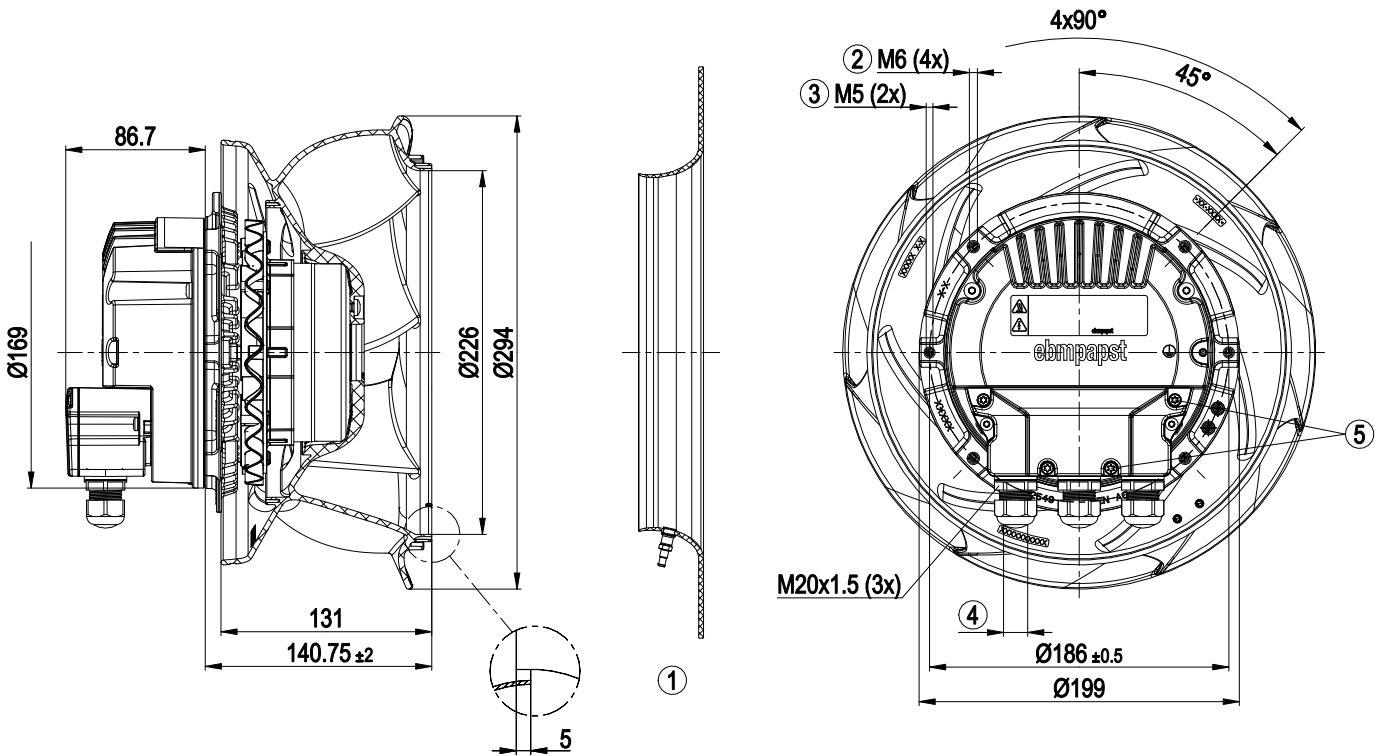


1	Accessory part: Inlet ring 8217102242 with pressure tap (k-factor: 115) (not included in scope of delivery)
2	Max. clearance for screw 10 mm
3	Max. clearance for screw 10 mm The M5 tapped holes (2x) can be used to attach hoisting equipment.
4	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
5	Tightening torque 2 ± 0.3 Nm

8300101860
VBS0280SSPFZ

EC centrifugal fan - RadiCal

backward-curved, single-intake


Accessory part

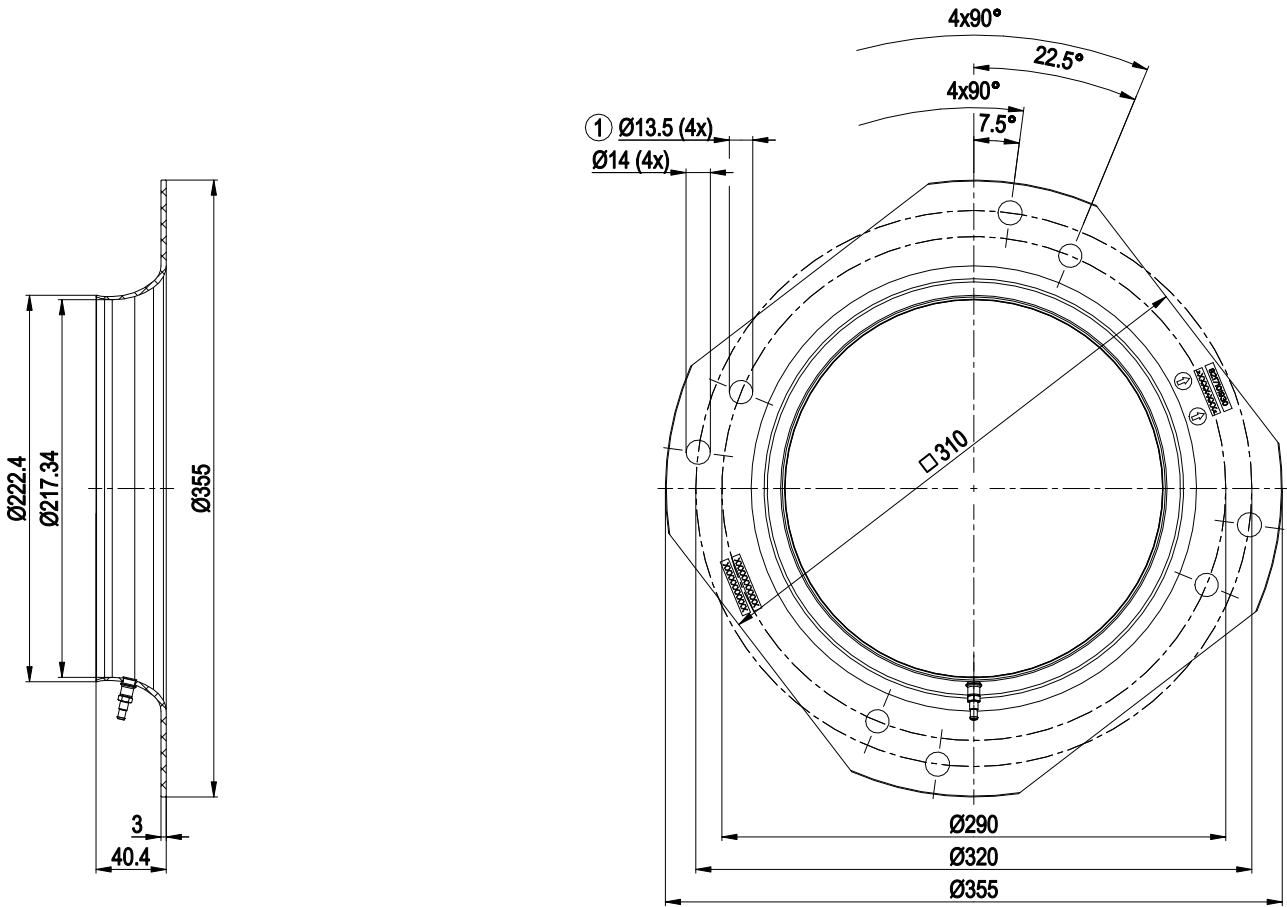

1 Fastening holes for FlowGrid 25310-2-2957 (not included in scope of delivery) are provided and must be subsequently opened as required

Inlet ring 8217102242 with pressure tap (k-factor: 115)

Connection diagram

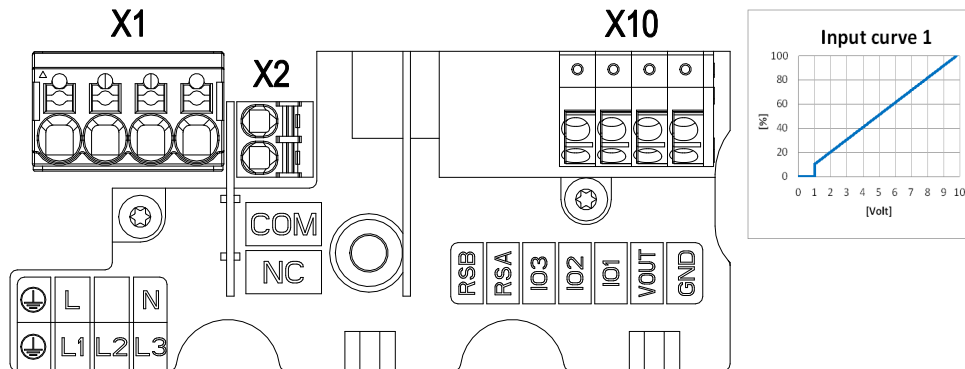

No.	Conn.	Designation	Function/assignment
X1	PWR	PE	Protective earth
X1	PWR	L	Power supply, phase, see nameplate for voltage range
X1	PWR	N	Power supply, neutral conductor, see nameplate for voltage range
X2	CTRL	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
X2	CTRL	NC	Status relay, floating status contact, break for failure
X10	CTRL	GND	Reference ground for control interface, SELV
X10	CTRL	Vout	Voltage output 10 VDC +/-3%, I _{max} =10 mA Short-circuit-proof, power supply for external devices, SELV
X10	CTRL	IO1	Factory setting: Analog input 0-10 V / PWM, R _i =100 kΩ, function: set value Characteristic curve parameterizable (see input characteristic curve "Input curve 1"), SELV Function parameterizable at the factory (see table Optional interface functions)
X10	CTRL	IO2	Factory setting: Open collector output, U _{max} =50 VDC, I _{max} =20 mA, function:Tacho output 1 pulse/revolution, SELV Function parameterizable at factory (see table Optional interface functions)

Terminal/plug assignment


	configurable IO mode	electrical specification	INPUT	OUTPUT	
I01	<ul style="list-style-type: none"> Din1 (high active): digital input Ain1 0-10 V/PWM: analog input 	active: parametrizable voltage x - 30 VDC not active: pin open or parametrizable voltage < x VDC, SELV Ri = 100 kΩ, characteristic curve parametrizable, $f_{PWM} = 1 \text{ k} - 10 \text{ kHz}$, SELV	source: set value switch: parameter set: #1 / #2 switch: direction of rotation: cw / ccw switch: enable/disable input configurable function	signal: alarm out signal: diagnostics out signal: tach out signal: run monitoring signal: status signal: configurable function	
I02	<ul style="list-style-type: none"> Tach out (open collector) Diagnostics out (open collector) Alarm out (open collector) Open collector 	Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV Umax = 50 VDC, Imax = 20 mA, SELV			
COM NC	Relais	250 VAC / 2 A (AC1)			
Vout	Voltage output	Voltage 10 VDC, SELV			

Basic (B5)

Factory configuration option upon request

o factory configuration option

Curves: Air performance 50 Hz

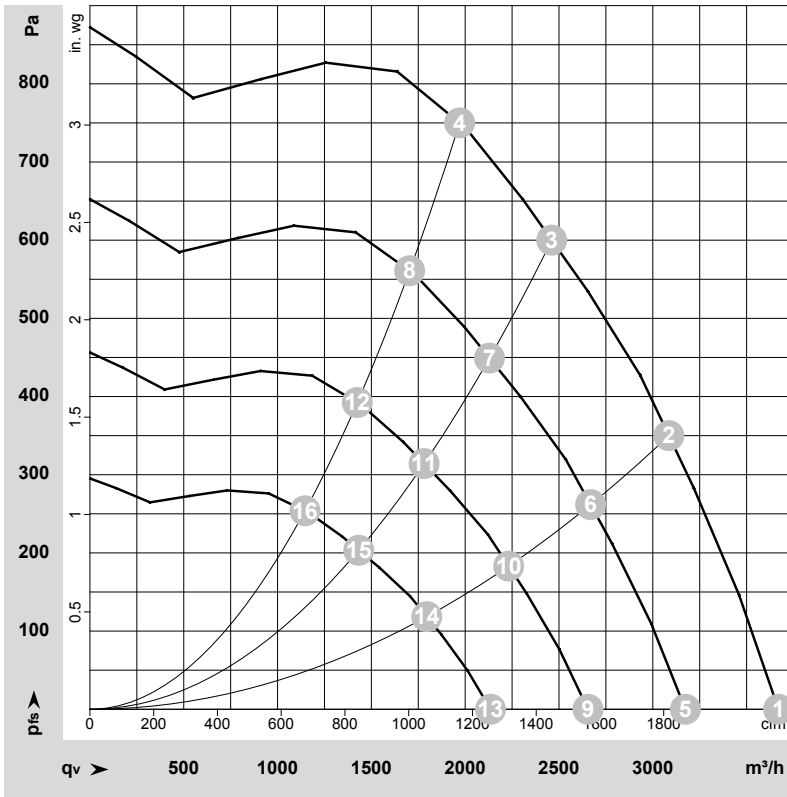

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-236161-1
Date: 2026-05-05
Nozzle: 8217101930

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	3180	363	1.60	3670	0	2160	0.00
2	1~	230	50	3180	552	2.42	3085	350	1815	1.41
3	1~	230	50	3180	615	2.69	2460	600	1450	2.41
4	1~	230	50	3180	645	2.82	1970	750	1160	3.01
5	1~	230	50	2750	235	1.04	3175	0	1870	0.00
6	1~	230	50	2750	357	1.56	2670	262	1570	1.05
7	1~	230	50	2750	399	1.75	2130	449	1255	1.80
8	1~	230	50	2750	417	1.83	1705	561	1005	2.25
9	1~	230	50	2300	137	0.61	2655	0	1565	0.00
10	1~	230	50	2300	209	0.92	2230	183	1315	0.73
11	1~	230	50	2300	233	1.02	1780	314	1050	1.26
12	1~	230	50	2300	244	1.07	1425	392	840	1.57
13	1~	230	50	1850	71	0.32	2135	0	1255	0.00
14	1~	230	50	1850	109	0.48	1795	118	1055	0.47
15	1~	230	50	1850	121	0.53	1435	203	845	0.81
16	1~	230	50	1850	127	0.56	1145	254	675	1.02

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · P_{fs} = Pressure increase