

8317082303
VWA0800BTPZ

EC centrifugal fan - RadiCal

backward-curved, single-intake

ebm-papst Ventilator (Shanghai) Co., Ltd.
No.418, Hua Jing Road, Pilot Free Trade Zone, Pudong District,
Shanghai, China, 200131
8317082303 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Part number	8317082303	
Type	VWA0800BTPZ	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1100
Power consumption	W	2900
Current draw	A	4.4
Max. back pressure	Pa	260
Max. back pressure	in. wg	1.04
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Occasional start-up at temperatures between -40 °C and -25 °C is permitted. For continuous operation at ambient temperatures below -25 °C (such as refrigeration applications), a fan design with special low-temperature bearings must be used.

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	49.8	36.5	09 Power consumption P_{ed}	kW	2.82
02 Measurement category		A		09 Air flow q_v	m ³ /h	19455
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	247
04 Efficiency grade N		53.3	40	10 Speed (rpm) n	min ⁻¹	1105
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-184393


The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



EC centrifugal fan - RadiCal

backward-curved, single-intake


Product drawing

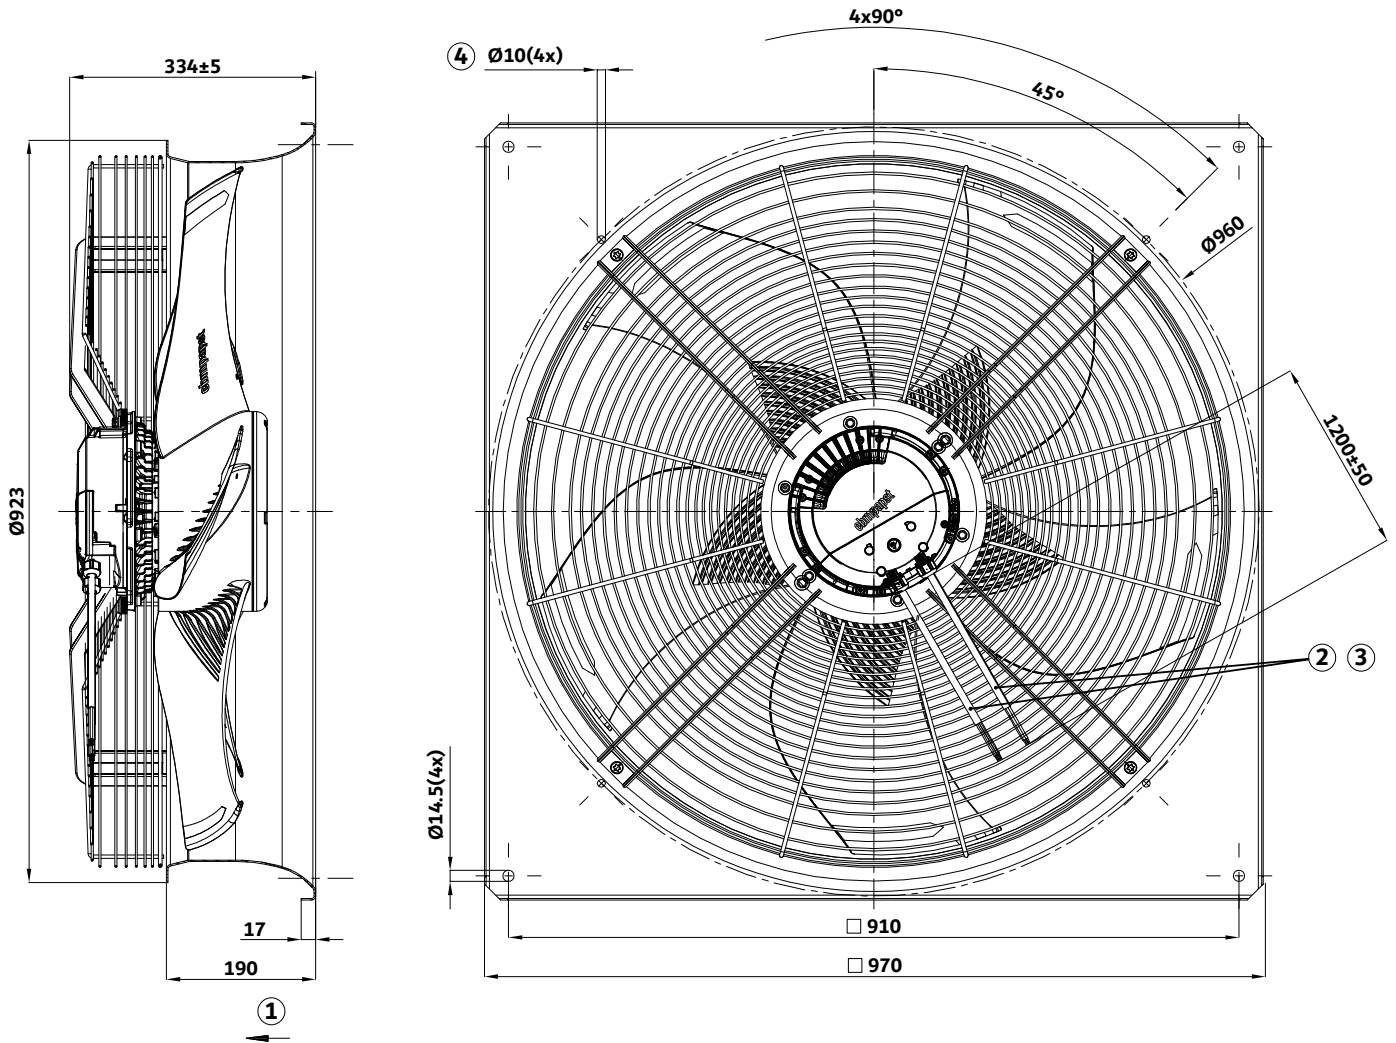

1	Airflow direction "V"
2	Cable length and customer connector (both power and signal) can be adjusted according to customer request
3	Cable wire diameter: power: AWG 15(4x); signal: AWG 22(8x)
4	Attachment holes for FlowGrid (80000-2-2957 not included in scope of delivery)




Connection diagram



Wire color	Designation	Function/assignment
black	L1	Power supply, phase, see nameplate for voltage range
black	L2	Power supply, phase, see nameplate for voltage range
black	L3	Power supply, phase, see nameplate for voltage range
green/yellow	PE	Protective earth
grey	RSA	RS485 interface for MODBUS, RSA; SELV
brown	RSB	RS485 interface for MODBUS, RSB; SELV
blue	GND	Reference ground for control interface, SELV
white	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
yellow	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
red	Vout	Voltage output 10VDC+/-3%, I _{max} =10mA supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
orange (1)	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10mA, reinforced insulation on supply side and on control interface side
orange (2)	NC	Status relay, floating status contact, break for failure
	P1-IN	Input characteristic curve

Curves: Air performance 50 Hz

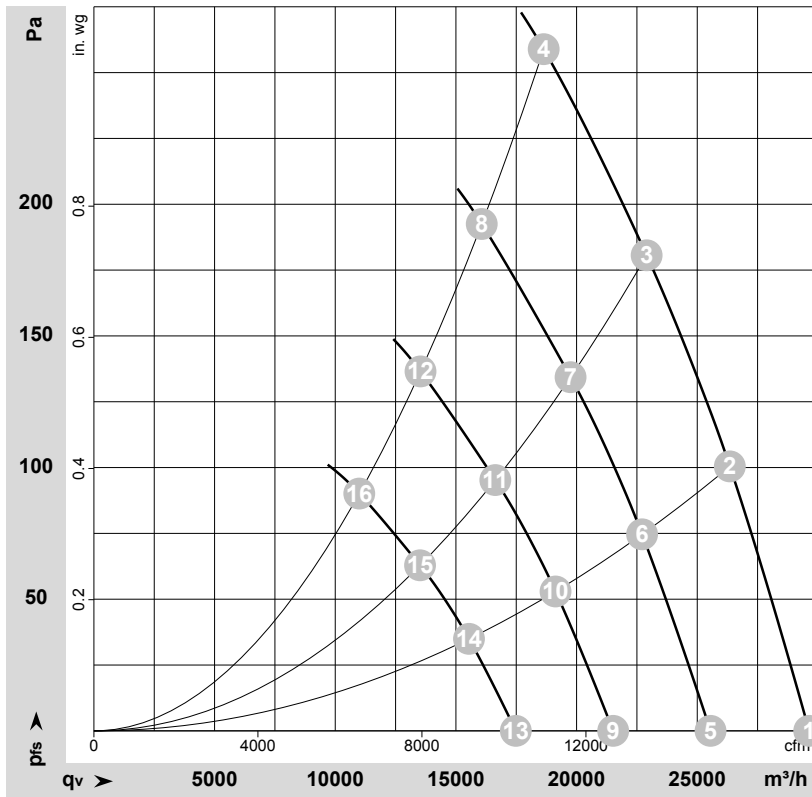

$\rho = 1.18 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-184393-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	1100	1866	2.94	72	80	82	29640	0	17445	0.00
2	3~	400	50	1100	2283	3.55	70	78	80	26350	100	15510	0.40
3	3~	400	50	1100	2566	3.97	72	79	80	22905	180	13480	0.72
4	3~	400	50	1100	2900	4.40	77	84	84	18635	260	10970	1.04
5	3~	400	50	950	1195	1.88	69	76	78	25550	0	15040	0.00
6	3~	400	50	950	1461	2.27	67	75	76	22715	75	13370	0.30
7	3~	400	50	950	1646	2.54	68	75	76	19750	134	11625	0.54
8	3~	400	50	950	1847	2.84	73	80	80	16070	193	9460	0.77
9	3~	400	50	800	714	1.12	64	72	74	21515	0	12665	0.00
10	3~	400	50	800	873	1.36	62	70	72	19130	54	11260	0.22
11	3~	400	50	800	983	1.52	64	71	72	16630	95	9790	0.38
12	3~	400	50	800	1103	1.70	68	76	76	13535	137	7965	0.55
13	3~	400	50	650	383	0.60	59	67	69	17480	0	10290	0.00
14	3~	400	50	650	468	0.73	57	65	66	15540	35	9145	0.14
15	3~	400	50	650	527	0.81	59	66	67	13515	63	7955	0.25
16	3~	400	50	650	592	0.91	63	70	71	10995	90	6470	0.36

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase