

8317087810 Sample  
VMA0350HSNFS

# EC axial panel fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## ebm-papst Ventilator (Xi'an) Co.,Ltd.

No.2555, No.5 Weishui Road, Weibei Industry Park, Lintong District,  
Xi'an, China, 710605

366100

8317087810 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Item	8317087810	
Motor	E07436-29	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	1510
Power consumption	W	170
Current draw	A	1.3
Max. back pressure	Pa	103
Max. back pressure	in. wg	0.41
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	38.7	28.8	09 Power consumption $P_{ed}$	kW	0.17
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	2375
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	100
04 Efficiency grade N		55.4	40	10 Speed (rpm) n	min <sup>-1</sup>	1510
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$

ID-19753

# EC axial panel fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Technical description

Size	350 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	Press-fitted sheet steel blank, sprayed with PP plastic
Guard grille material	Steel, coated with black plastic (RAL 9005)
Number of blades	5
Airflow direction	V
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul>
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor detection
With cable	Variable
Protection class assignment	<p>I; If a protective earth is connected by the customer</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection.</p>
Conformity with standards	GB12350, CCC, CE

8317087810 Sample


VMA0350HSNFS

# EC axial panel fan - HyBlade

sickle-shaped blades (S series)

with guard grille for short nozzle

## Product drawing

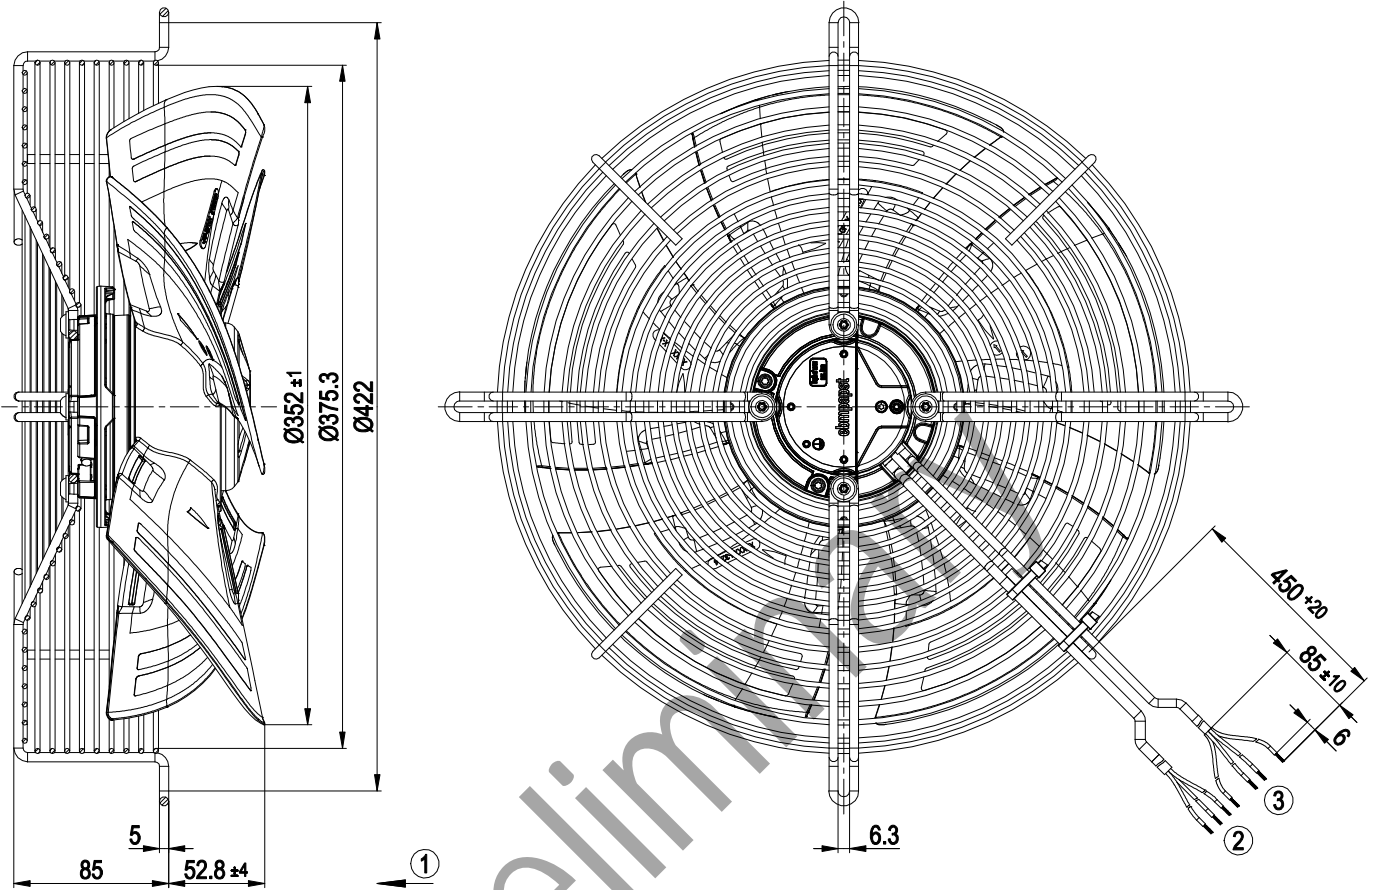


1	Airflow direction "V"
2	Supply line (PWR) PVC AWG20 3x splice
3	Control wire (CTRL) PVC AWG22 4x splice

# EC axial panel fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Connection diagram

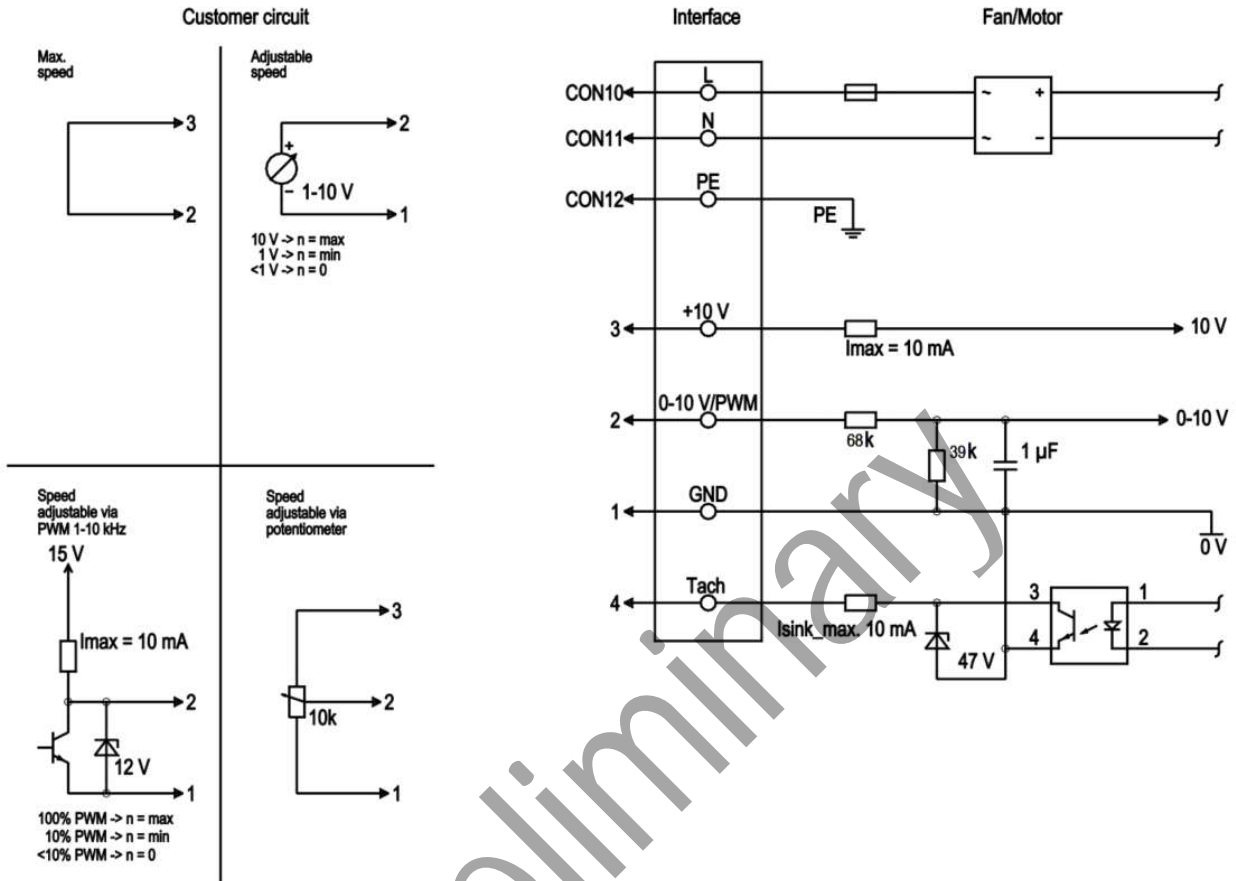


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Protective earth
	3	+10 V	red	Fixed voltage output 10 VDC +/- 3 %, I <sub>max.</sub> 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	2	0-10 V / PWM	yellow	0-10 V / PWM control input, R <sub>i</sub> =100 kΩ, SELV
	1	GND	blue	Reference ground for control interface, SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, I <sub>sink max.</sub> = 10 mA, SELV

# EC axial panel fan - HyBlade

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Curves: Air performance 50 Hz

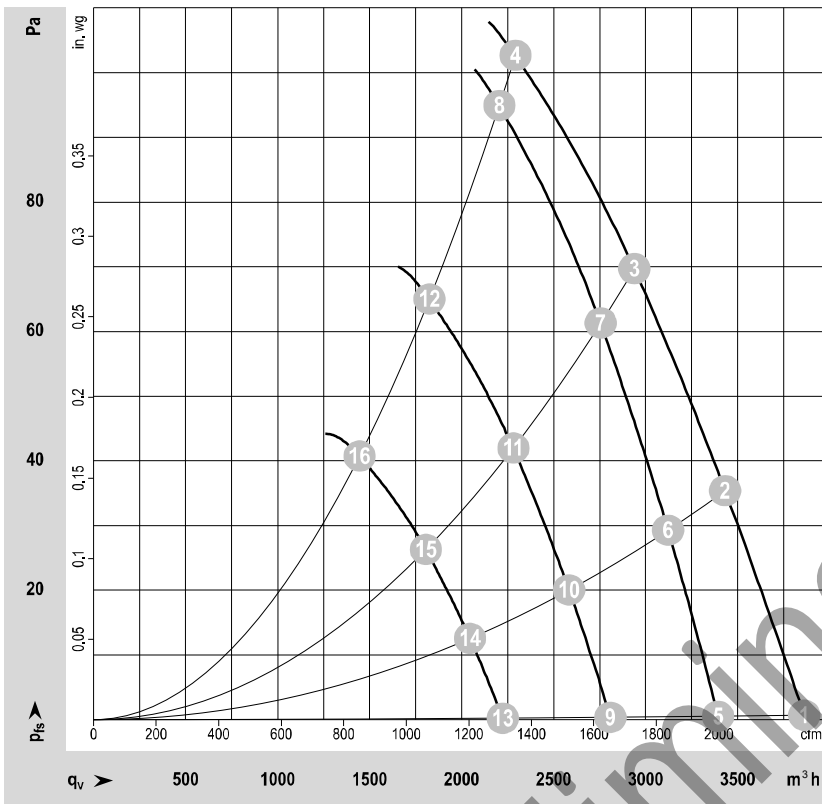

$\rho = 1.2 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-19753  
Date: 20250403  
Housing: 18901-2-4037

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P1	I	qv	pfs	qv	Pfs
	V	Hz	min-1	W	A	m³/h	Pa	cfm	in.wg
1	230	50	1650	166	1.2	3862	0	2275	0.00
2	230	50	1595	168	1.2	3431	35	2021	0.14
3	230	50	1547	169	1.2	2939	70	1731	0.28
4	230	50	1508	170	1.3	2293	103	1351	0.41
5	230	50	1450	113	0.8	3394	0	1999	0.00
6	230	50	1450	127	0.9	3121	29	1838	0.12
7	230	50	1450	140	1.0	2756	61	1623	0.24
8	230	50	1450	151	1.1	2205	95	1299	0.38
9	230	50	1200	64	0.5	2808	0	1654	0.00
10	230	50	1200	72	0.5	2583	20	1521	0.08
11	230	50	1200	79	0.6	2281	42	1344	0.17
12	230	50	1200	85	0.6	1825	65	1075	0.26
13	230	50	950	32	0.2	2223	0	1309	0.00
14	230	50	950	36	0.3	2045	13	1205	0.05
15	230	50	950	39	0.3	1805	26	1063	0.10
16	230	50	950	42	0.3	1445	41	851	0.16

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase