

A1G300-AF25-09

Solaro Energy

# EC axial fan

sickle-shaped blades (S series)

A1G300-AF25-09 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	A1G300-AF25-09	
Motor	M1G055-BI	
Nominal voltage	VDC	17
Nominal voltage range	VDC	12 .. 22
Method of obtaining data		fa
Speed (rpm)	min <sup>-1</sup>	1150
Power consumption	W	13.5
Current draw	A	0.86
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



A1G300-AF25-09

Solaro Energy

# EC axial fan

sickle-shaped blades (S series)

## Technical description

<b>Weight</b>	1.2 kg
<b>Fan size</b>	300 mm
<b>Rotor surface</b>	Cast in PA plastic
<b>Blade material</b>	PA plastic
<b>Number of blades</b>	5
<b>Airflow direction</b>	"V"
<b>Direction of rotation</b>	Counterclockwise, viewed toward rotor
<b>Degree of protection</b>	IP54; installation- and position-dependent
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	- Speed selection max./min.
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC circuit feedback</b>	According to EN 61000-3-2/3
<b>EMC interference emission</b>	According to EN 61000-6-3 (household environment)
<b>With cable</b>	Lateral




A1G300-AF25-09

Solaro Energy

# EC axial fan

sickle-shaped blades (S series)


## Product drawing

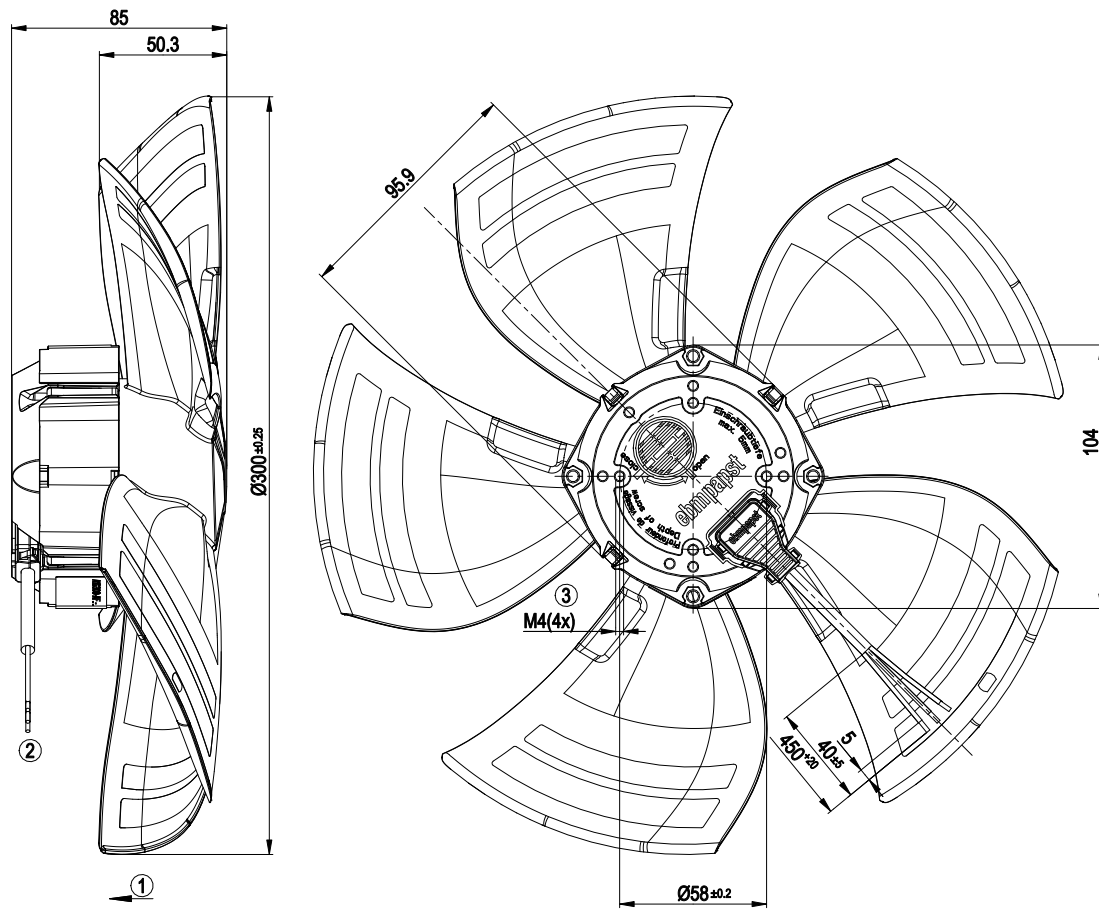

- |   |                                 |
|---|---------------------------------|
| 1 | Direction of air flow "V"       |
| 2 | Cable AWG20, 2x crimped splices |
| 3 | Max. clearance for screw 5 mm   |




Connection diagram

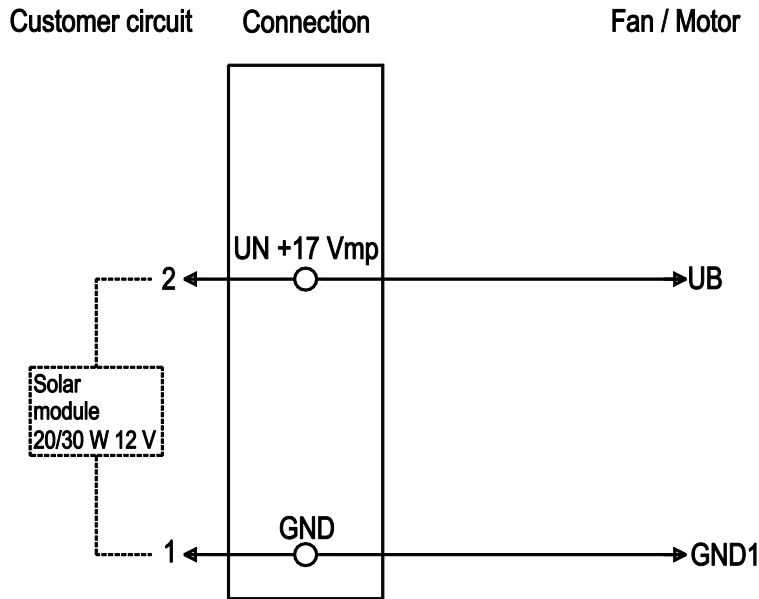

No.	Conn.	Designation	Color	Function/assignment
	1	GND	blue	Reference ground
	2	Un +17Vmp	red	Power supply 17 Vmp, Voc 22 V

## Curves: Air performance

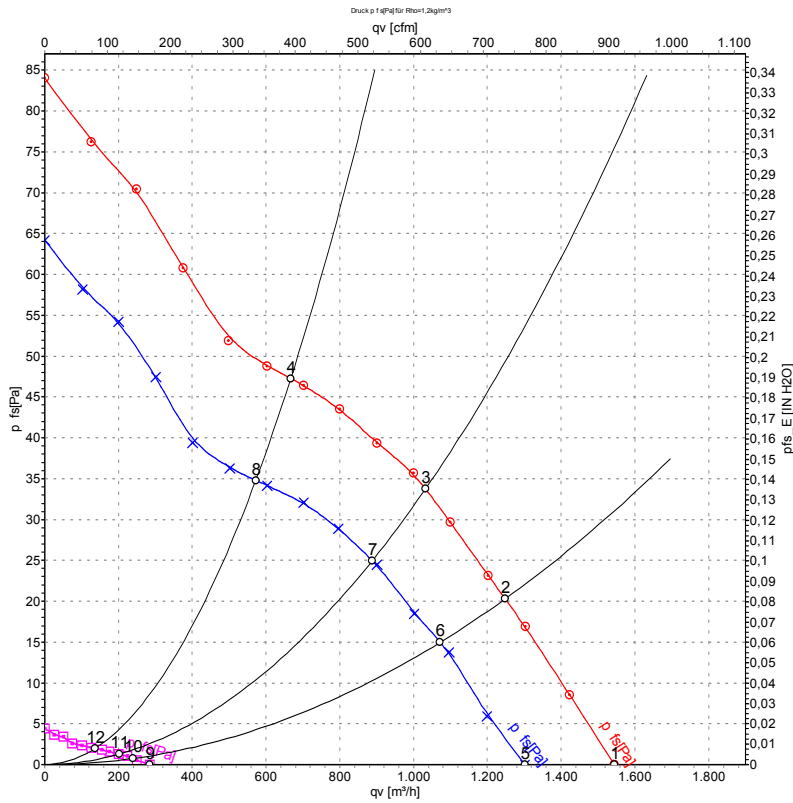

Measurement: LU-136333-1  
 Measurement: LU-136331-1  
 Measurement: LU-136337-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	n	P <sub>ed</sub>	I	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	22	1360	23	1.16	1545	0	910	0.00
2	22	1270	26	1.33	1250	20	735	0.08
3	22	1225	27	1.40	1030	34	605	0.14
4	22	1170	29	1.50	665	47	395	0.19
5	17	1150	14	0.86	1300	0	765	0.00
6	17	1085	16	1.01	1070	15	630	0.06
7	17	1055	17	1.08	890	25	525	0.10
8	17	1015	18	1.16	570	35	335	0.14
9	12	255	0.60	0.06	285	0	165	0.00
10	12	250	0.58	0.06	240	1	140	0.00
11	12	245	0.60	0.06	200	1	120	0.00
12	12	240	0.67	0.06	135	2	80	0.01

U = Power supply · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

