

AC axial fan

sickled blades (S series), single inlet

A2E250-AN35-10 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	A2E250-AN35-10				
Motor	M2E068-CA				
Phase		1~	1~	1~	1~
Nominal voltage	VAC	230	230	230	230
Frequency	Hz	50	50	60	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	UL 2111	CE	UL 2111
Speed (rpm)	min ⁻¹	2000	2000	1850	1850
Power input	W	95	105	110	120
Current draw	A	0.4	0.45	0.48	0.52
Motor capacitor	µF	2.5	2.5	2.5	2.5
Capacitor voltage	VDB	400	400	400	400
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	55	55	35	35

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	1.5 kg
Size	250 mm
Motor size	68
Surface of rotor	Coated in black
Material of blades	Sheet steel, coated in black
Number of blades	7
Direction of air flow	V
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP44; Depending on installation and position as per EN 60034-5
Insulation class	"B"
Humidity (F) / environmental protection class (H)	H1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On the stator side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE
Approval	CSA C22.2 no. 77; UL 1004-3

AC axial fan


sickled blades (S series), single inlet

Product drawing

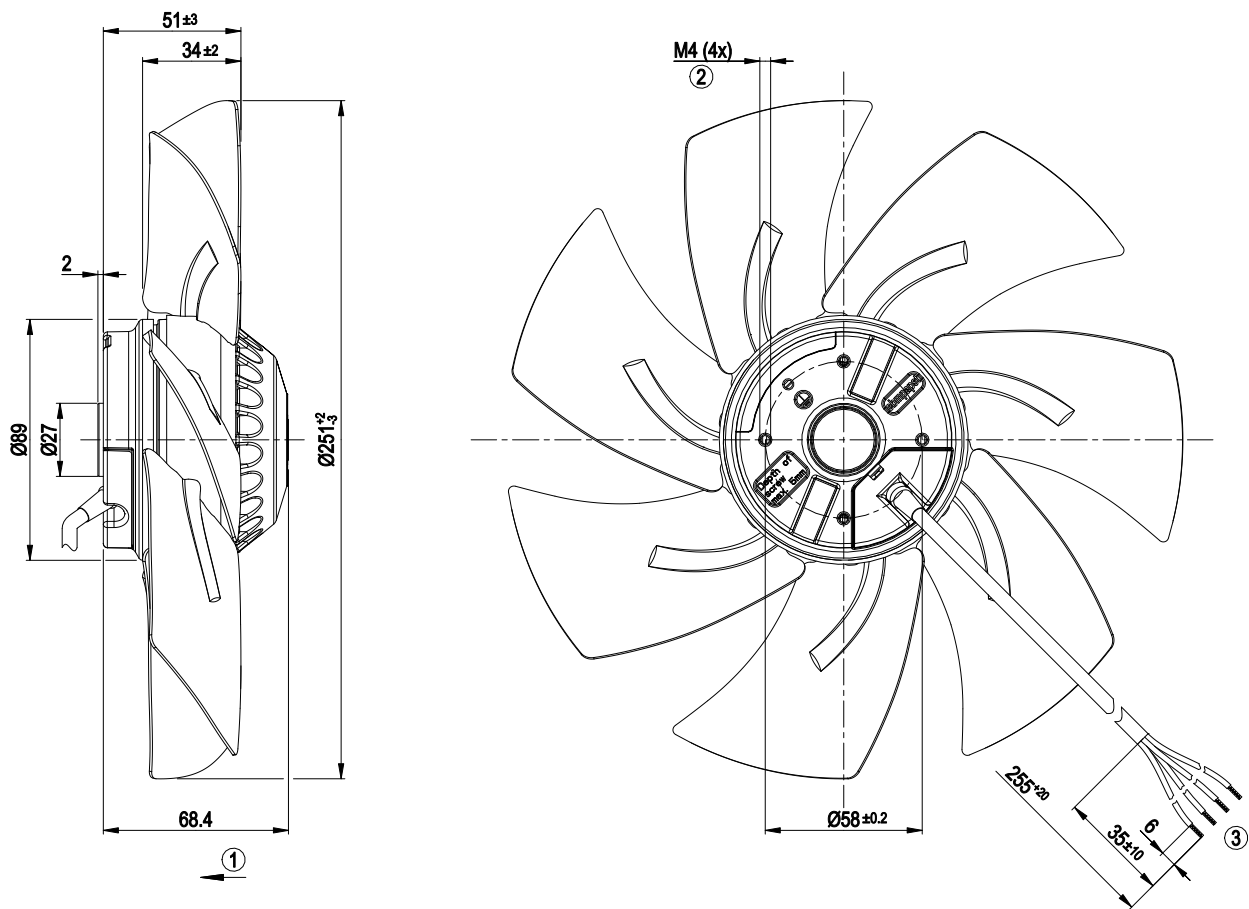

1	Direction of air flow "V"
2	Thread reach max. 5 mm
3	Connection line PVC AWG20, 4x lead tips crimped

Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan

sickled blades (S series), single inlet

Charts: Air flow 50 Hz

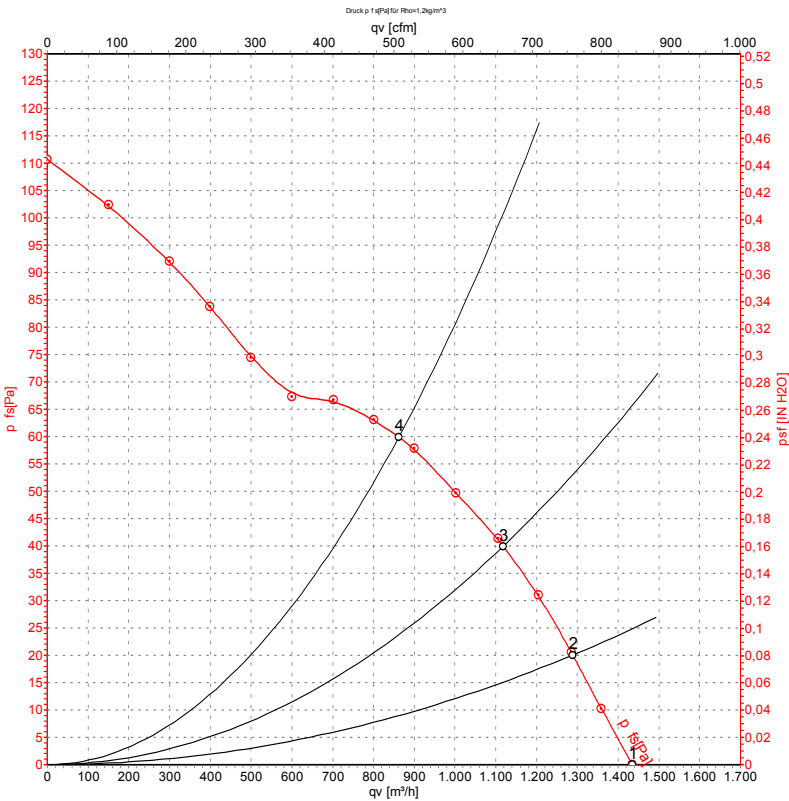

Measurement: LU-75345-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values


	U	f	n	P _e	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	2000	95	0.40	1435	0	845	0.00
2	230	50	1955	95	0.40	1290	20	760	0.08
3	230	50	1860	95	0.41	1120	40	660	0.16
4	230	50	1790	95	0.41	860	60	505	0.24

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase



AC axial fan
sickled blades (S series), single inlet

Charts: Air flow 60 Hz

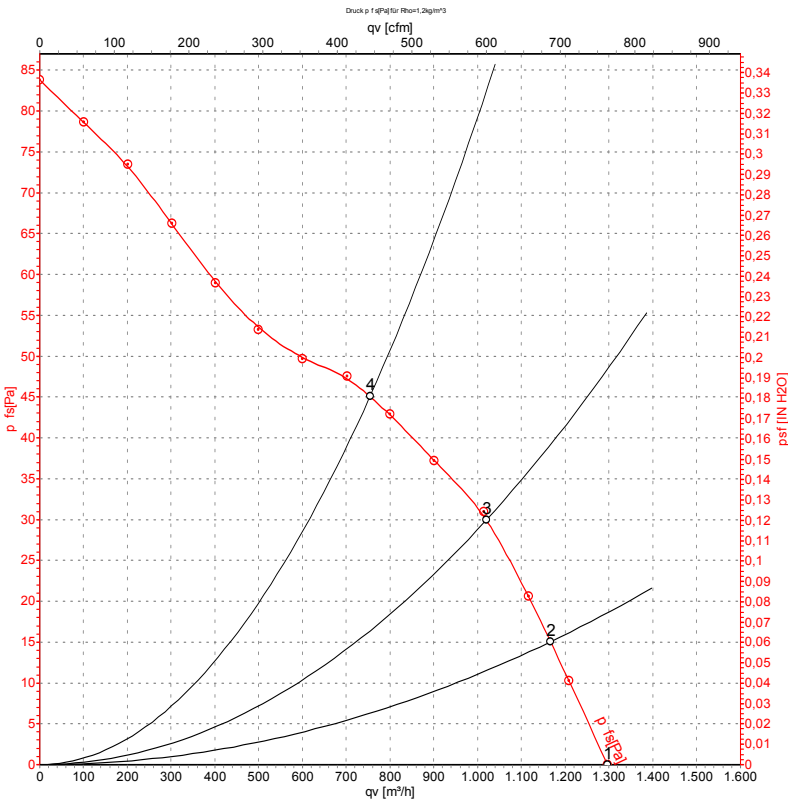

Measurement: LU-75346-1

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	60	1850	110	0.48	1295	0	765	0.00
2	230	60	1755	108	0.47	1165	15	685	0.06
3	230	60	1675	107	0.47	1020	30	600	0.12
4	230	60	1560	106	0.46	755	45	445	0.18

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase

