

A3G300-AK13-17 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	A3G300-AK13-17	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed (rpm)	min ⁻¹	1410
Power input	W	60
Current draw	A	0.51
Max. back pressure	Pa	65
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations




Technical features

Mass	1.5 kg
Size	300 mm
Surface of rotor	Passivated
Material of impeller	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"B"
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None, open rotor
Operation mode	S1
Motor bearing	Ball bearing with anti-freezing grease
Technical features	- Speed adjustment input (230 V) - Output limit - Motor current limit - Soft start - Over-temperature protected electronics / motor - Line undervoltage detection
Speed steps	2
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1; CE




Product drawing

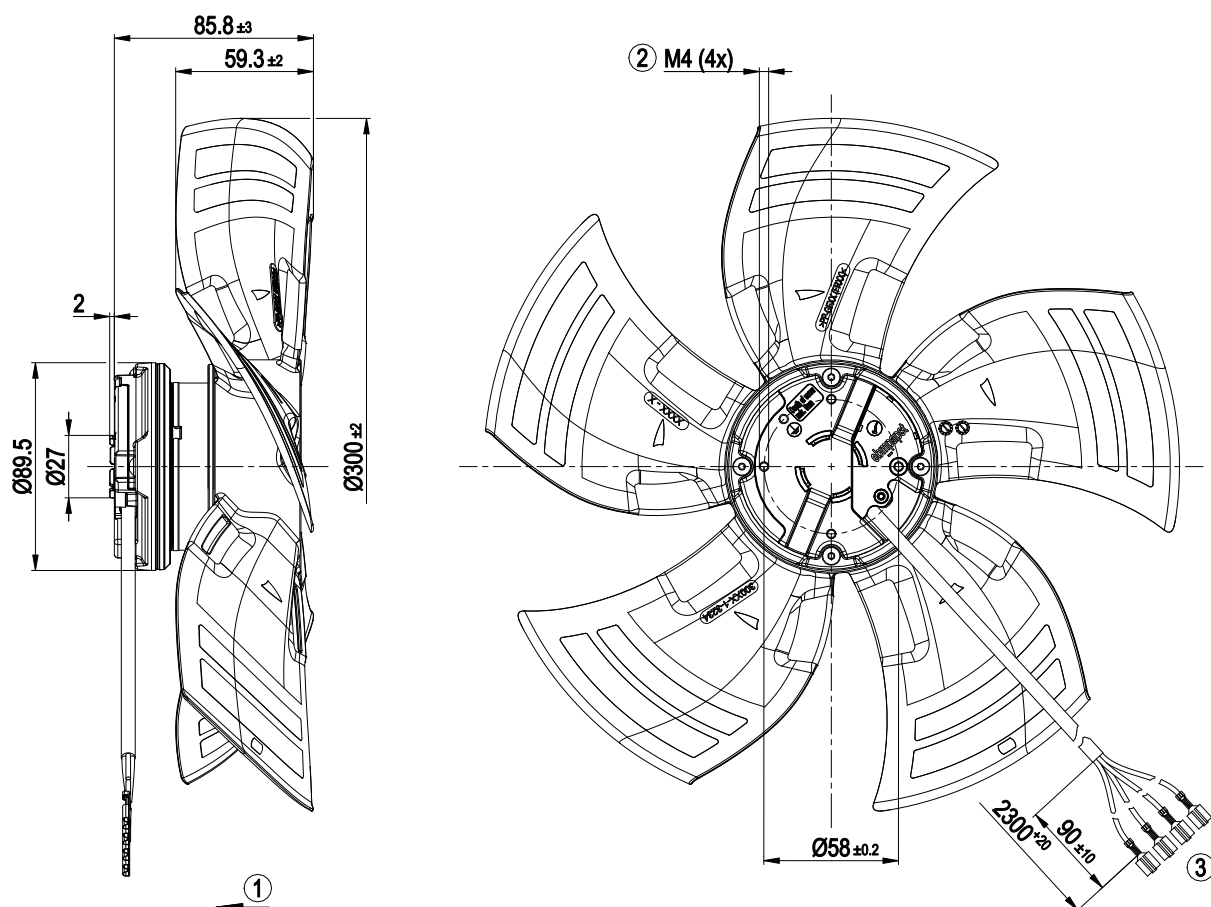

1	Direction of air flow "V"
2	Thread reach max. 5 mm
3	Connection line PVC AWG20, 4x threaded pin 6.3x0.8 crimped


Connection screen

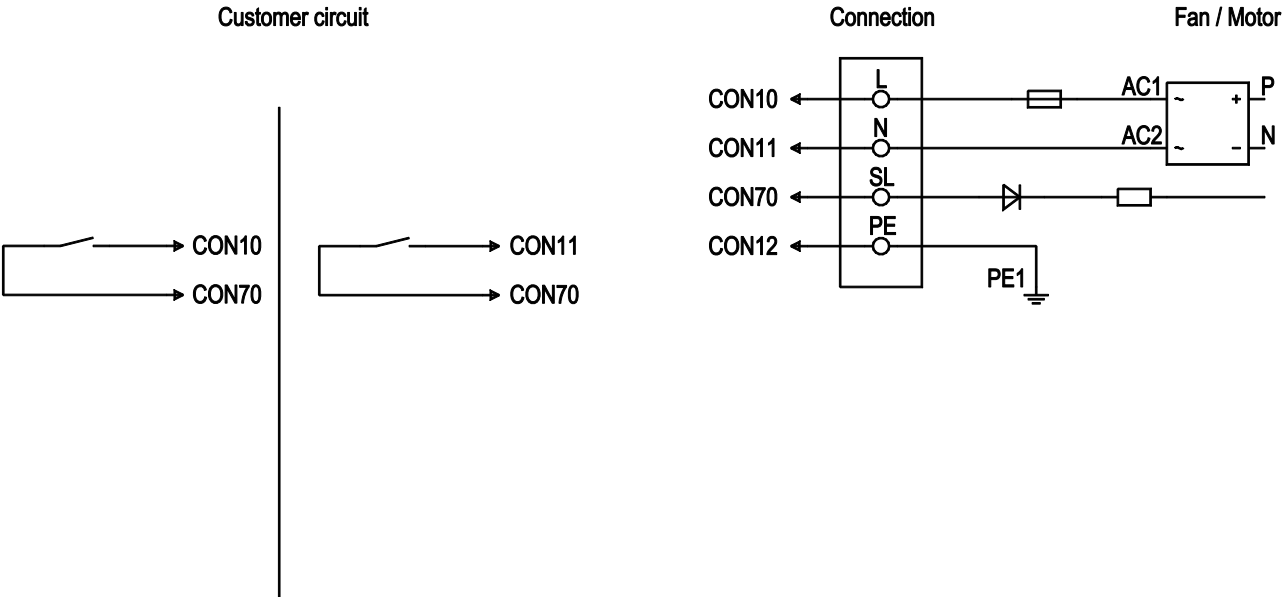

No.	Conn.	Designation	Colour	Function / assignment
	CON 10	L	black	Power supply 230 VAC, 50 - 60 Hz, see type plate for voltage range
	CON 11	N	blue	Neutral conductor
	CON 12	PE	green/yellow	Protective earth
	CON 70	SL	brown	Speed selection: Switch open = speed 1 (fast), switch closed = speed 2 (slow)



Charts: Air flow 50 Hz

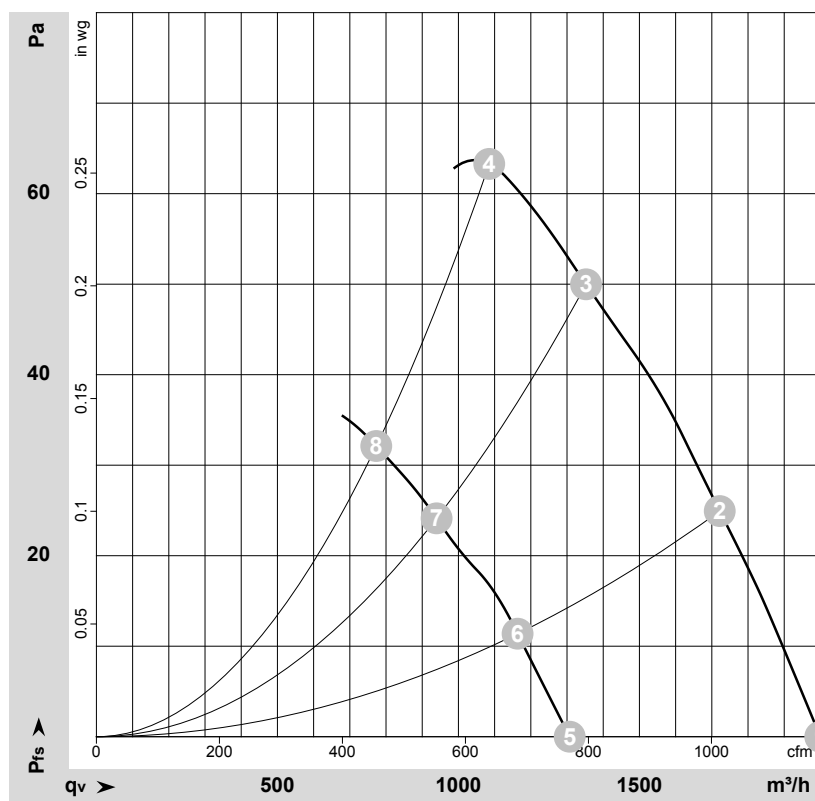

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-173365-1
Measurement: LU-152736-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	1465	45	0.44	2000	0	1175	0.00
2	230	50	1430	50	0.48	1720	25	1015	0.10
3	230	50	1410	56	0.50	1355	50	795	0.20
4	230	50	1410	60	0.51	1085	65	640	0.26
5	230	50	1010	18	0.20	1305	0	770	0.00
6	230	50	995	20	0.21	1165	11	685	0.04
7	230	50	980	21	0.23	940	24	555	0.10
8	230	50	965	23	0.24	775	32	455	0.13

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

