

A3G350-ALB2-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com



Nominal data

Type	A3G350-ALB2-12	
Motor	M3G074-CF	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 52
Type of data definition		fa
Speed	min ⁻¹	1910
Power input	W	255
Current draw	A	5.4
Max. back pressure	Pa	40
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+40

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = 1 + p_{fS} / 100 000 Pa

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		40.4	26.3	30.3
Efficiency grade N		50.1	36	40
Power input P _e	kW	0.29		
Air flow q _v	m ³ /h	2705		
Pressure increase p _{fS}	Pa	142		
Speed n	min ⁻¹	1785		

Data established at point of optimum efficiency




Technical features

Mass	2 kg
Size	350 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	PP plastic
Number of blades	5
Direction of air flow	"A"
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	None
Motor bearing	Ball bearing
Technical features	- Tach output - Motor current limit - Soft start - Control input 0-10 VDC / PWM - Over-temperature protected electronics
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC interference emission	Acc. to EN 55022 (Class B, household environment)
Motor protection	Reverse polarity and locked-rotor protection
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60335-1, motor does not have factory-installed overheating protection

EC axial fan

sickled blades (S series)

Product drawing

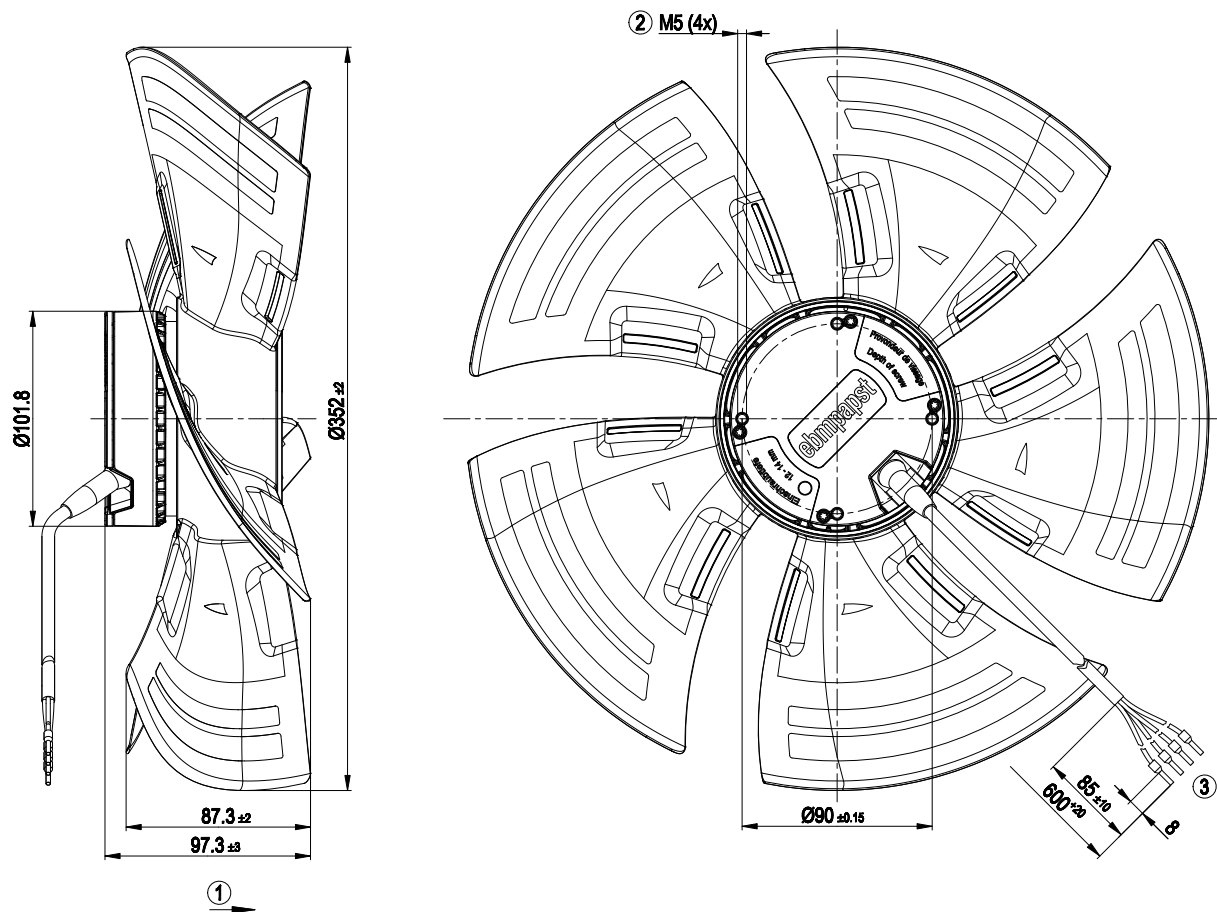


1	Direction of air flow "A"
2	Depth of screw 12-14 mm
3	Connection line PVC AWG16, 4x crimped core-end sleeves



EC axial fan


sickled blades (S series)

Connection screen

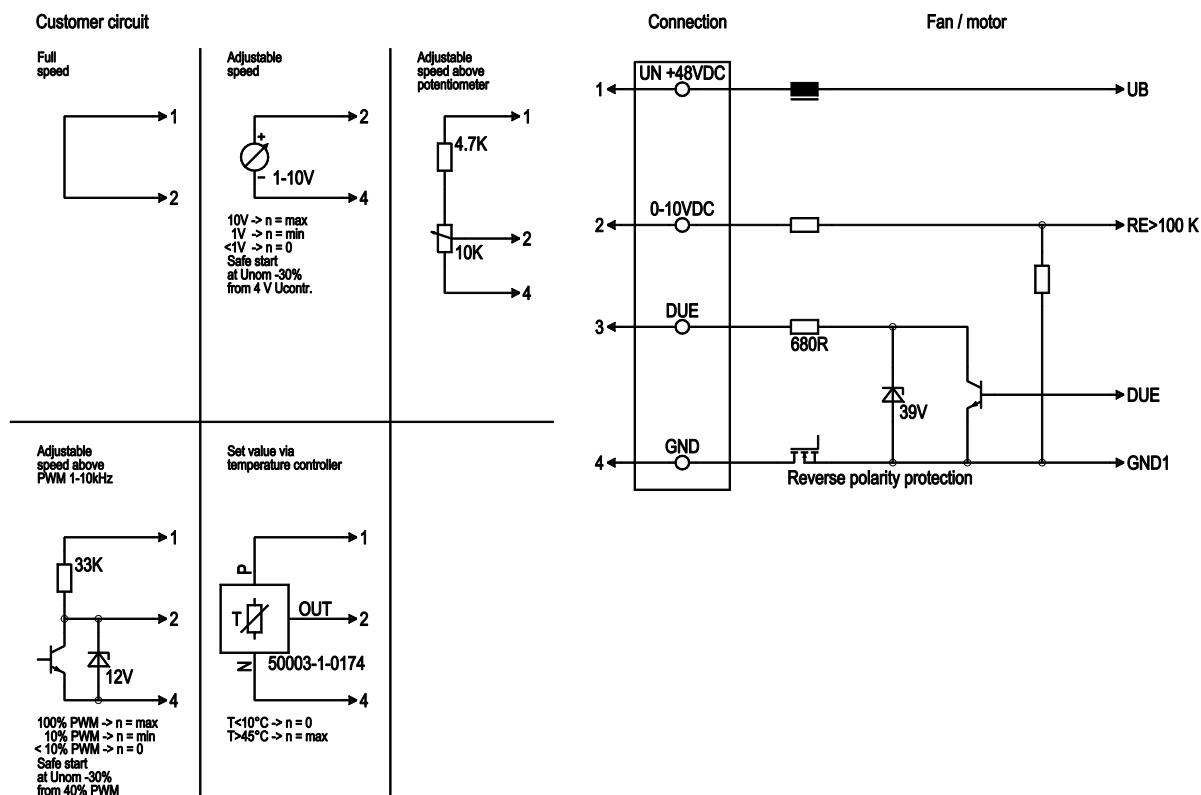

Line	No.	Signal	Colour	Function / assignment
	1	Un +48 VDC	red	Power supply 48 VDC, residual ripple 3.5 %
	2	0-10 VDC	yellow	Control input Re>100 K
	3	Tach	white	Speed monitoring output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference mass

Charts: Air flow

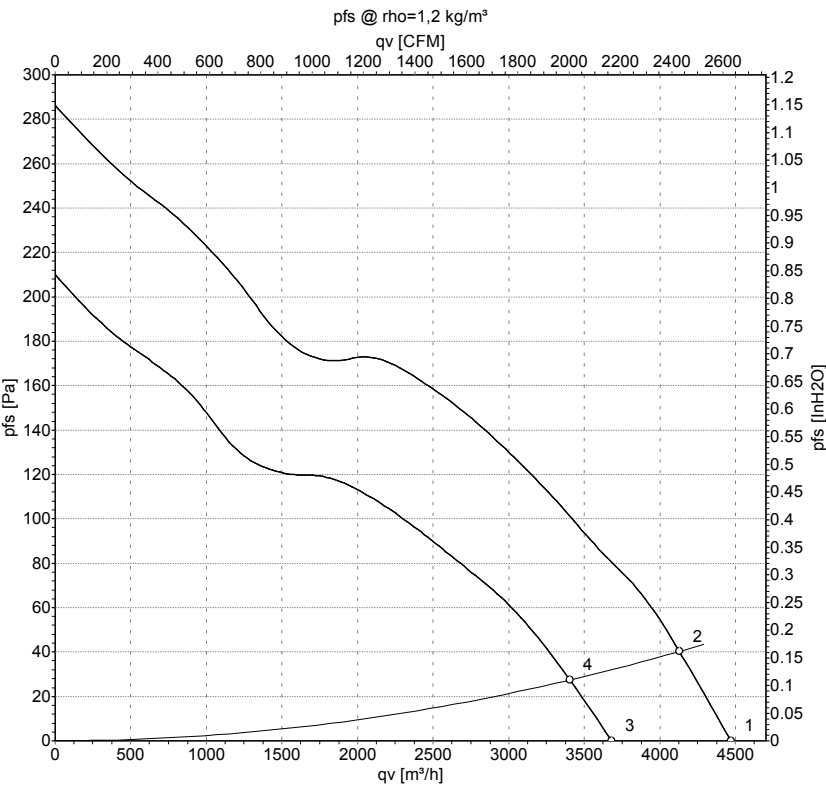

Measurement: LU-143291
Measurement: LU-143307

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: LwA measured as per ISO 13347 /
LpA measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	U	n	P _{ed}	I	qv	p _{fs}
	V	min ⁻¹	W	A	m³/h	Pa
1	48-52	1910	255	5.40*	4470	0
2	48-52	1870	269	5.65*	4125	40
3	36	1565	140	3.89	3680	0
4	36	1540	147	4.09	3405	28

U = Supply voltage · n = Speed · P_{ed} = Power input · I = Current draw · * = Current measured at rated voltage · qv = Air flow · p_{fs} = Pressure increase

