



A3G800-AN36-23 ebmpapst Datasheet  
 sales@fansco.com  
 www.fansco.com

Limited partnership · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
 Amtsgericht (court of registration) Stuttgart · HRB 590142



## Nominal data

Type	A3G800-AN36-23	
Motor	M3G112-GA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	600
Power consumption	W	440
Current draw	A	1.9
Max. back pressure	Pa	70
Max. back pressure	inH2O	0.28
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
 Subject to change

## Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	42.6	31.1	09 Power consumption $P_{ed}$	kW	0.39
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	9565
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	58
04 Efficiency grade N		51.5	40	10 Speed (rpm) n	min <sup>-1</sup>	590
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.  
 The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$


LU-126143



### Technical description

Weight	10.5 kg
Fan size	800 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum, painted black
Blade material	Press-fitted sheet steel blank, sprayed with PP plastic
Number of blades	5
Airflow direction	"V"
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F4-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- RS-485 ebmBUS</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul>
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Via terminal box
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	EAC


Product drawing

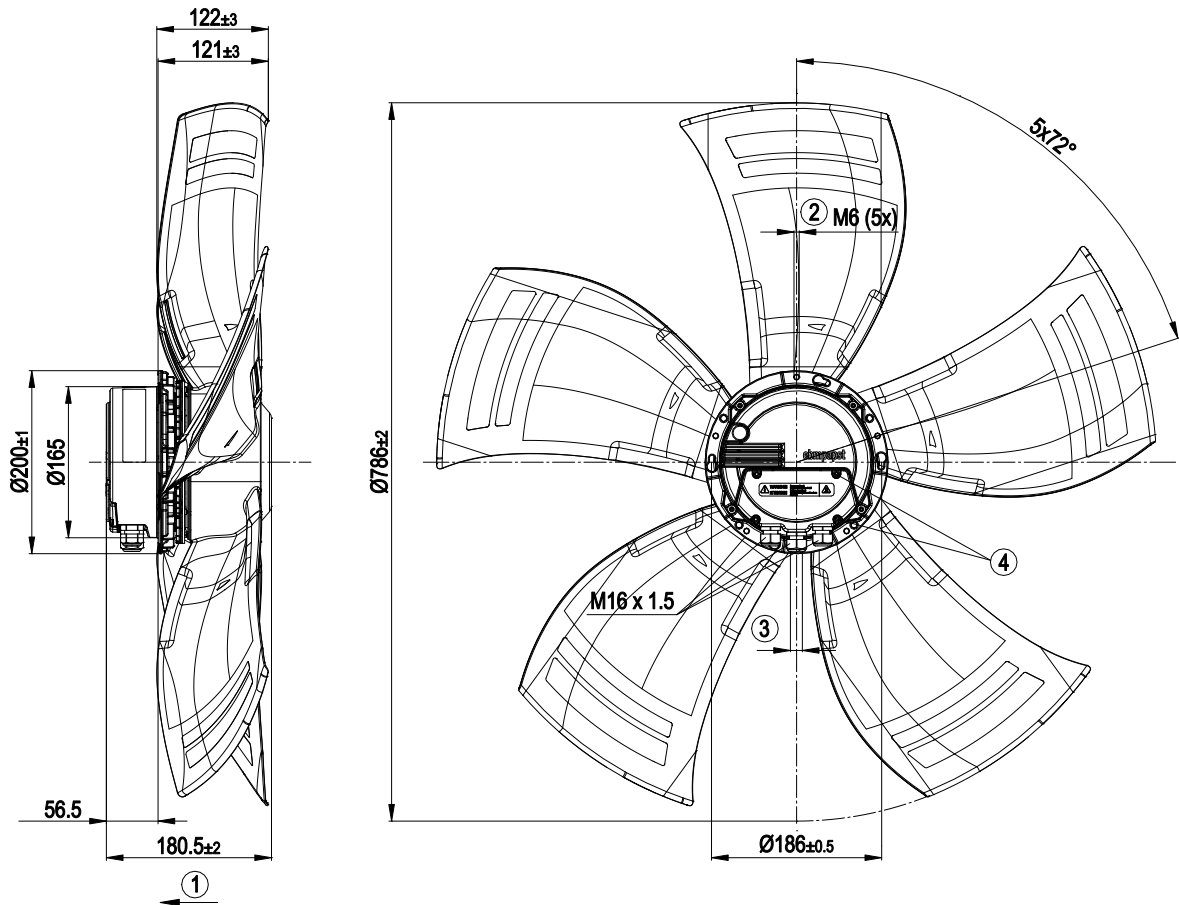

1	Direction of air flow "V"
2	Clearance for screw 12-16 mm
3	Cable diameter min. 4 mm, max. 10 mm, tightening torque $2.5 \pm 0.4$ Nm
4	Tightening torque $3.5 \pm 0.5$ Nm



## Curves: Air performance 50 Hz

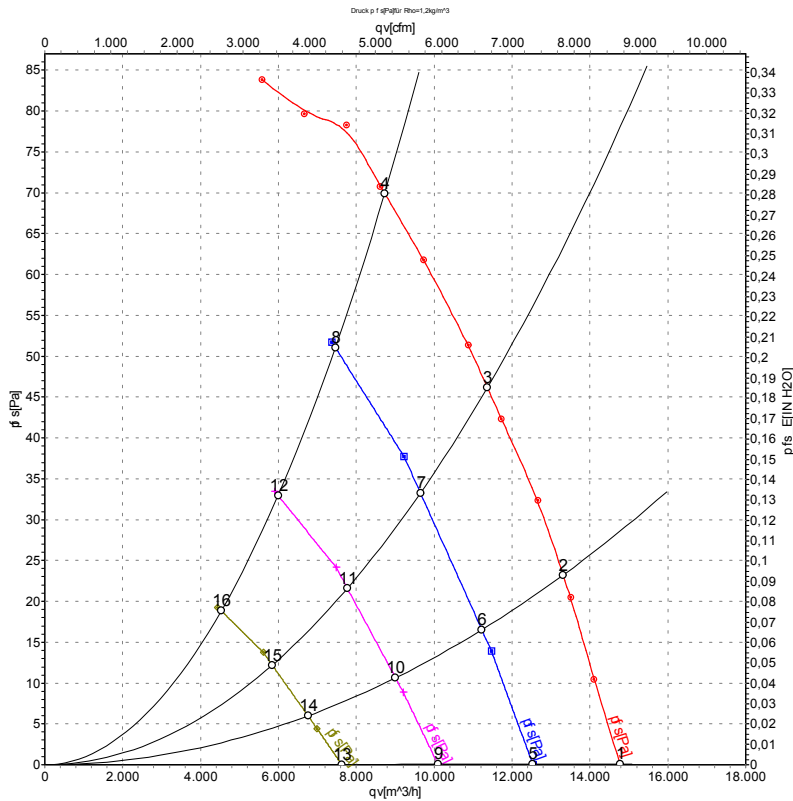

Measurement: LU-119388-1  
 Measurement: LU-120591-1  
 Measurement: LU-120592-1  
 Measurement: LU-120593-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	qv	P <sub>fs</sub>	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	CFM	inH2O
1	230	50	600	288	1.27	57	64	63	14770	0	8695	0.00
2	230	50	600	342	1.50	55	61	61	13310	23	7835	0.09
3	230	50	600	382	1.68	53	59	59	11370	46	6690	0.18
4	230	50	600	440	1.90	56	64	64	8730	70	5140	0.28
5	230	50	500	171	0.77	53	60	59	12530	0	7375	0.00
6	230	50	500	200	0.90	52	58	57	11230	16	6610	0.06
7	230	50	500	228	1.01	49	56	55	9645	33	5680	0.13
8	230	50	500	257	1.14	52	60	59	7460	51	4390	0.20
9	230	50	400	95	0.47	49	55	54	10100	0	5945	0.00
10	230	50	400	109	0.53	47	53	53	9005	11	5300	0.04
11	230	50	400	123	0.58	44	51	51	7770	22	4575	0.09
12	230	50	400	137	0.64	46	53	54	5990	33	3525	0.13
13	230	50	300	48	0.30	41	48	49	7625	0	4485	0.00
14	230	50	300	53	0.32	39	47	48	6760	6	3980	0.02
15	230	50	300	60	0.34	39	45	47	5840	12	3440	0.05
16	230	50	300	67	0.36	38	46	47	4530	19	2665	0.08

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · P<sub>fs</sub> = Pressure increase

