

# AC axial fan

straight blades (A series)

A4D200-AA36-17 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	A4D200-AA36-17	
Motor	M4D068-CF	
Phase		3~
Nominal voltage	VAC	480
Wiring		Y
Frequency	Hz	60
Method of obtaining data		fa
Valid for approval/standard		UL
Speed (rpm)	min <sup>-1</sup>	1760
Power consumption	W	21
Current draw	A	0.08
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	80
Starting current	A	260


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



## Technical description

Weight	1.4 kg
Fan size	200 mm
Rotor surface	Painted black
Blade material	Sheet steel, galvanized
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	UL 1004-1; CSA C22.2 No. 100


Product drawing

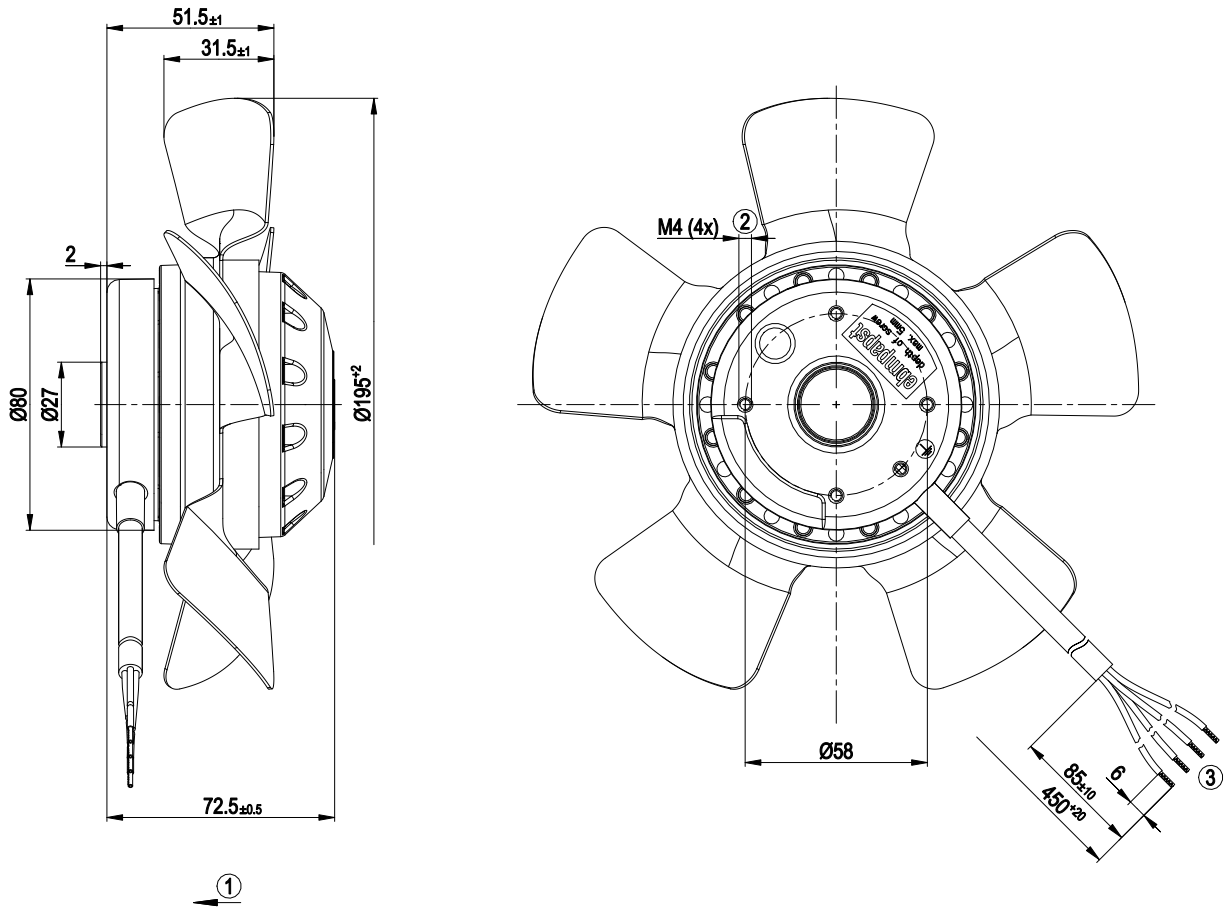

1	Direction of air flow "V"
2	Max. clearance for screw 5 mm
3	Cable 3x PFA AWG20, 1x PFA AWG18, 4x crimped splices



## Connection diagram




Change of rotation direction by reversing two phases

	Three-phase motor	Y	Star connection	L1	black
L2	blue	L3	brown	PE	green/yellow



**Curves: Air performance 60 Hz**

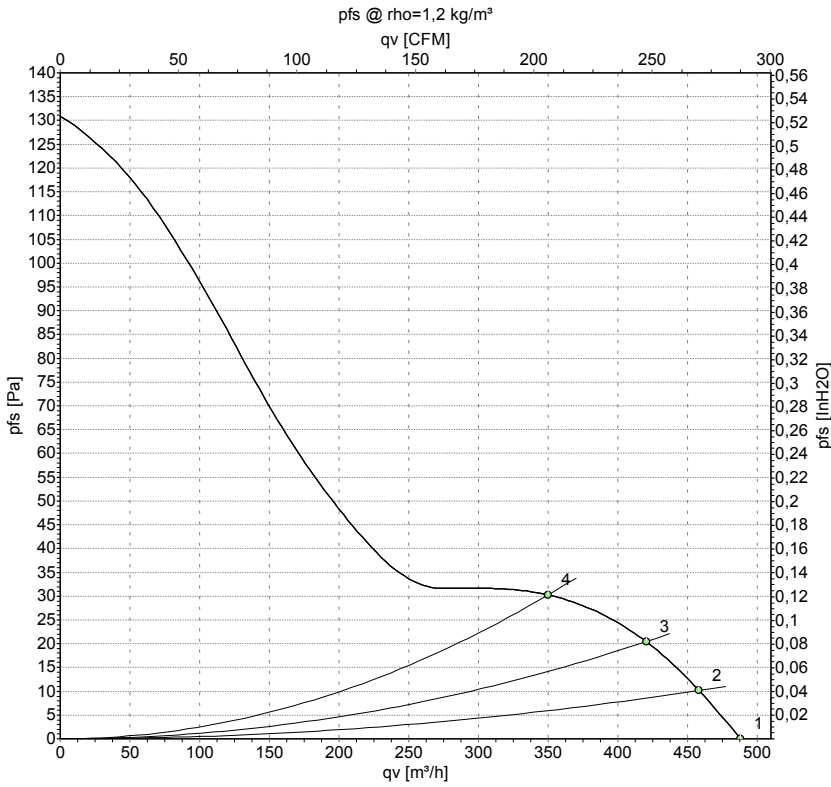

Measurement: LU-121204-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

**Measured values**

	Wired	U	f	n	P <sub>e</sub>	I	qv	p <sub>fs</sub>	qv	p <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	CFM	inH2O
1	Y	480	60	1760	21	0.08	490	0	285	0.00
2	Y	480	60	1755	23	0.07	460	10	270	0.04
3	Y	480	60	1755	23	0.07	420	20	250	0.08
4	Y	480	60	1755	23	0.07	350	30	205	0.12

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

