

AC axial fan

straight blades (A series)



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2

74673 Mulfingen

Phone: +49 7938 81-0

Fax: +49 7938 81-110

www.fansco.com

sales@fansco.com

Nominal data

Type	A4D350-AA06-02				
Motor	M4D068-EC				
Phase		3~	3~	3~	3~
Nominal voltage	[V]	230	230	400	400
Connection		D	D	Y	Y
Frequency	[Hz]	50	60	50	60
Type of data definition		rfa	rfa	rfa	rfa
Valid for approval / standard		CE	CE	CE	CE
Speed	[min ⁻¹]	1420	1620	1420	1620
Power input	[W]	145	190	145	190
Current draw	[A]	0.68	0.62	0.39	0.36
Max. back pressure	[Pa]	150	150	150	150
Max. ambient temperature	[°C]	50	50	50	50

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

AC axial fan

straight blades (A series)


Technical features

Size	350 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Humidity class	F1-2
Direction of air flow	"A"
Insulation class	"B"
Cable exit	Lateral
Bearing motor	Ball bearing
Mass	3.1 kg
Material of impeller	Sheet steel, coated in black
Number of blades	5
Type of protection	IP 44
Protection class	I
Approval	CCC

AC axial fan

straight blades (A series)

Product drawing

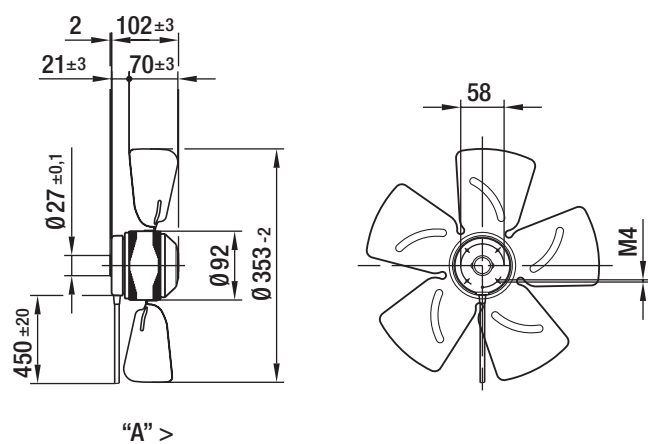


AC axial fan


straight blades (A series)

Connection screen

Delta (3~ 230 VAC)

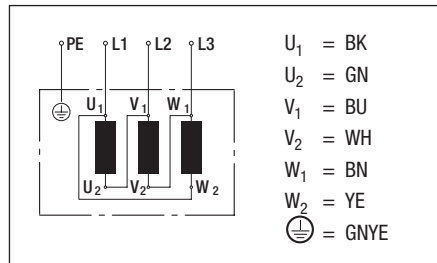


Star (3~ 400 VAC)

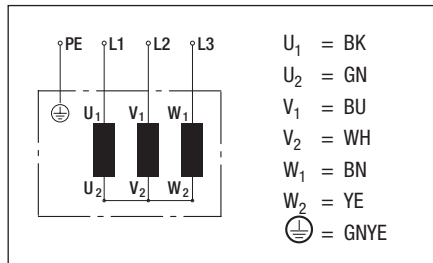

AC axial fan

straight blades (A series)

Charts: Air flow 50 Hz

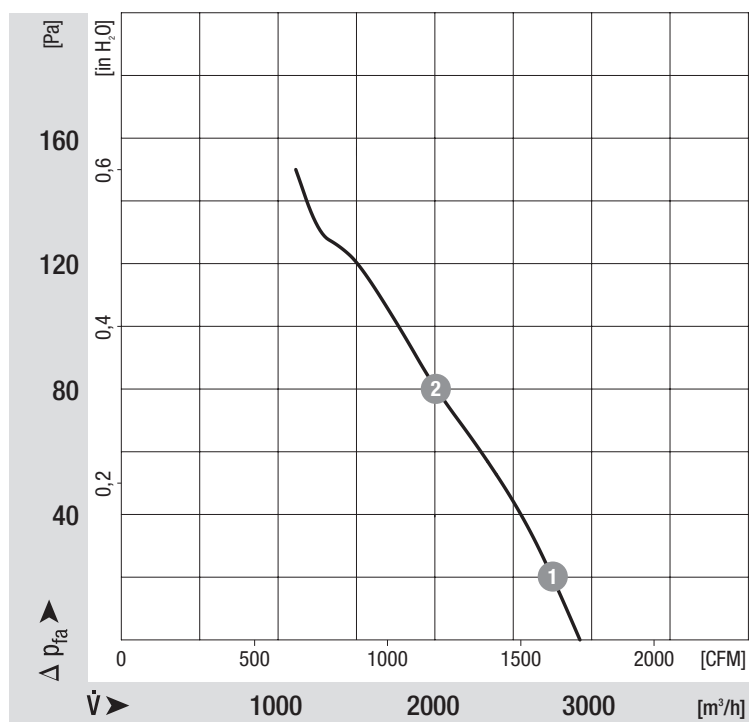

Measured values

	n	P ₁	I
	[min ⁻¹]	[W]	[A]
1	1405	154	0.39
2	1390	169	0.40

AC axial fan

straight blades (A series)

Charts: Air flow 60 Hz

