

A4D400-AN12-07 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	A4D400-AN12-07			
Motor	M4D094-FA			
Phase		3~	3~	3~
Nominal voltage	VAC	208	208	480
Wiring		Δ	Δ	Y
Frequency	Hz	50	60	60
Method of obtaining data		ml	ml	ml
Valid for approval/standard		CE	CE	CE
Speed (rpm)	min ⁻¹	1380	1550	1650
Power consumption	W	320	480	520
Current draw	A	1.38	1.65	0.97
Max. back pressure	Pa	100	125	145
Max. back pressure	inH ₂ O	0.4	0.5	0.58
Min. ambient temperature	°C	-40	-40	-40
Max. ambient temperature	°C	60	60	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
 Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	30.5	30.5
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		40	40
05 Variable speed drive		No	

Data obtained at optimum efficiency level.
 The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.31
09 Air flow q_v	m ³ /h	3605
09 Pressure increase p_{fs}	Pa	92
10 Speed (rpm) n	min ⁻¹	1405
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-109876



Technical description

Weight	5.8 kg
Fan size	400 mm
Rotor surface	Painted black
Blade material	PP plastic
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F4-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1 (2010); CE

Product drawing

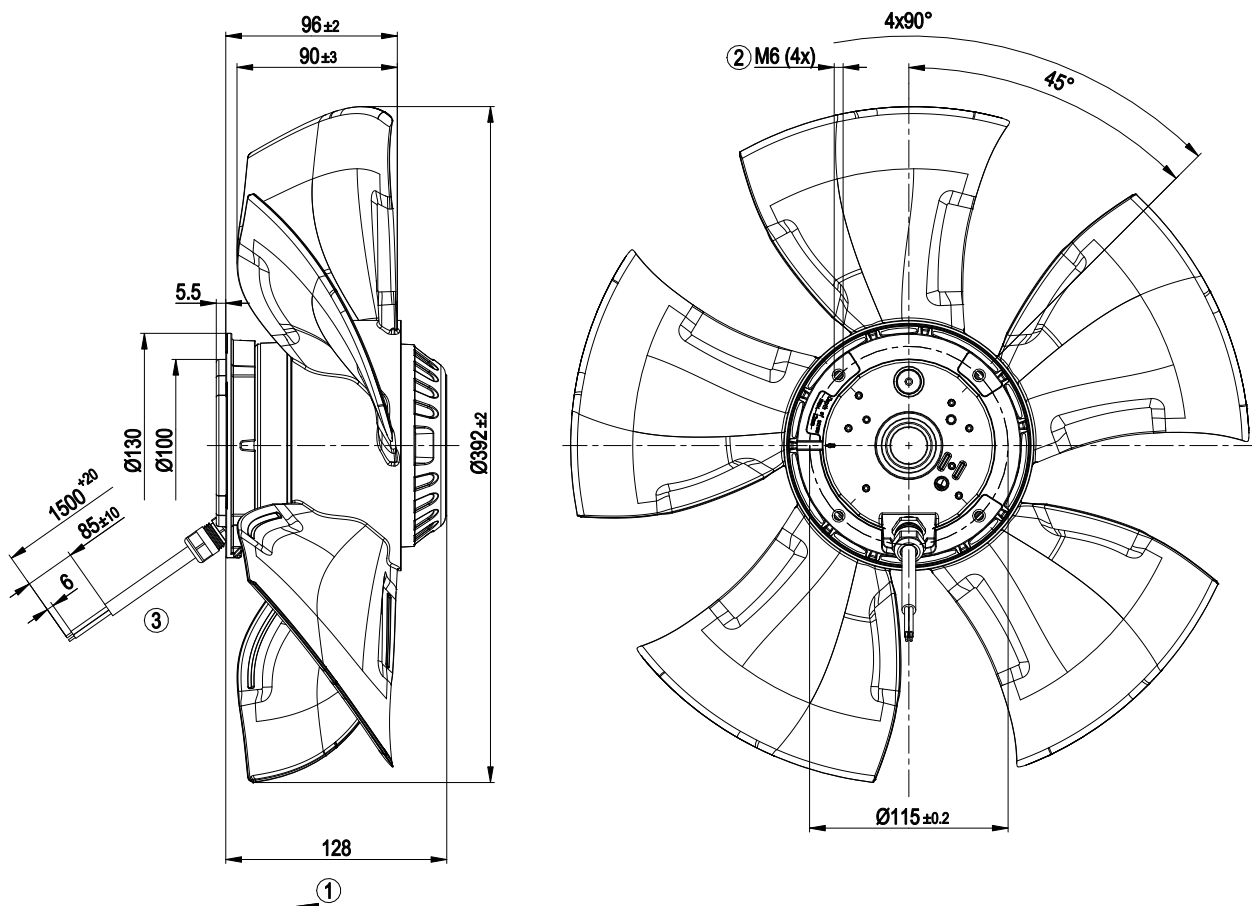


1	Direction of air flow "V"
2	Max. clearance for screw 12 mm
3	Cable silicone 9G 0.5 mm ² , 9x crimped splices

AC axial fan

sickle-shaped blades (S series)


Connection diagram

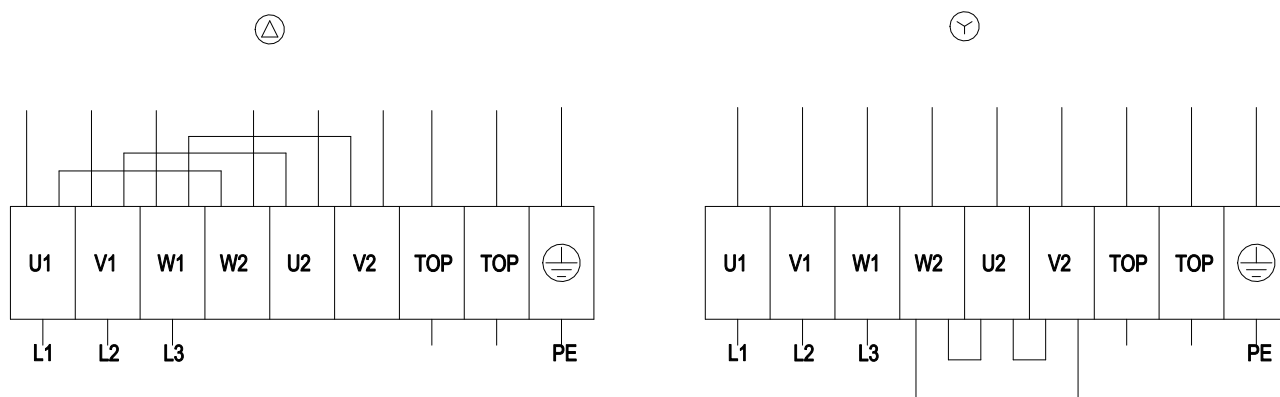

Δ	Delta connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2x gray
PE	green/yellow				

AC axial fan
sickle-shaped blades (S series)

Curves: Air performance 50 Hz

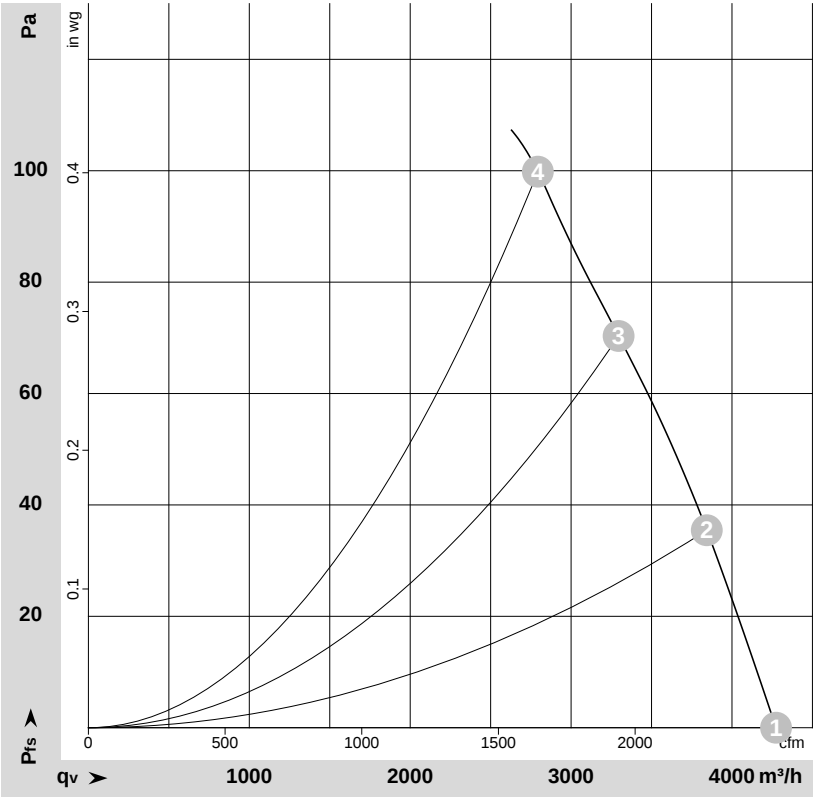

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-116624-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	Δ	208	50	1415	246	1.26	4275	0	2515	0.00
2	Δ	208	50	1415	254	1.28	3845	35	2260	0.14
3	Δ	208	50	1400	282	1.32	3295	70	1940	0.28
4	Δ	208	50	1380	320	1.38	2795	100	1645	0.40


Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC axial fan

sickle-shaped blades (S series)

Curves: Air performance 60 Hz

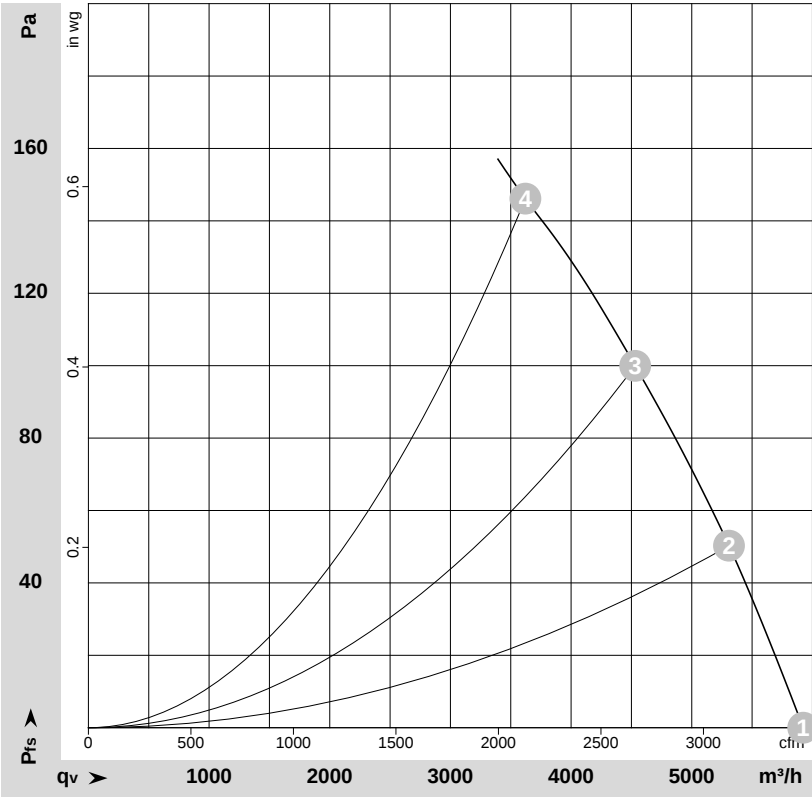

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-161436-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	Y. AUS	480	60	1685	441	0.88	5925	0	3485	0.00
2	Y. AUS	480	60	1680	469	0.89	5310	50	3125	0.20
3	Y. AUS	480	60	1670	493	0.90	4530	100	2665	0.40
4	Y. AUS	480	60	1650	520	0.97	3620	145	2130	0.58

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

