

# AC axial fan

sickled blades (S series)

A4D400-AN12-08 ebmpapst Datasheet  
 sales@fansco.com  
 www.fansco.com

Limited partnership · Headquarters Mulfingen  
 County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
 County court Stuttgart · HRB 590142

## Nominal data

Type	A4D400-AN12-08					
Motor	M4D094-FA					
Phase		3~	3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400	480
Connection		$\Delta$	$\Delta$	Y	Y	Y
Frequency	Hz	50	60	50	60	60
Type of data definition		ml	ml	ml	ml	ml
Valid for approval / standard		CE	CE	CE	CE	CE
Speed (rpm)	min <sup>-1</sup>	1410	1610	1410	1610	1650
Power input	W	330	470	330	470	520
Current draw	A	1.41	1.45	0.82	0.84	0.97
Max. back pressure	Pa	110	135	110	135	145
Min. ambient temperature	°C	-40	-40	-40	-40	-40
Max. ambient temperature	°C	70	60	70	60	60
Starting current	A		5.7		3.3	3.8

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
 Subject to alterations

## Data according to ErP directive

		Actual	Request 2015			
01 Overall efficiency $\eta_{es}$	%	30.5	30.5	09 Power input $P_e$	kW	0.31
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	3605
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	92
04 Efficiency grade N		40	40	10 Speed (rpm) n	min <sup>-1</sup>	1405
05 Variable speed drive		No		11 Specific ratio*		1.00

Data definition with optimum efficiency.  
 The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

\* Specific ratio =  $1 + p_g / 100\,000\text{ Pa}$

LU-109876




## Technical features

Mass	5.9 kg
Size	400 mm
Surface of rotor	Coated in black
Material of blades	PP plastic
Number of blades	5
Direction of air flow	"V"
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity (F)/environmental protection class (H)	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensate discharge holes	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out, basic insulation
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2010); CE
Approval	UL 1004-1



Product drawing

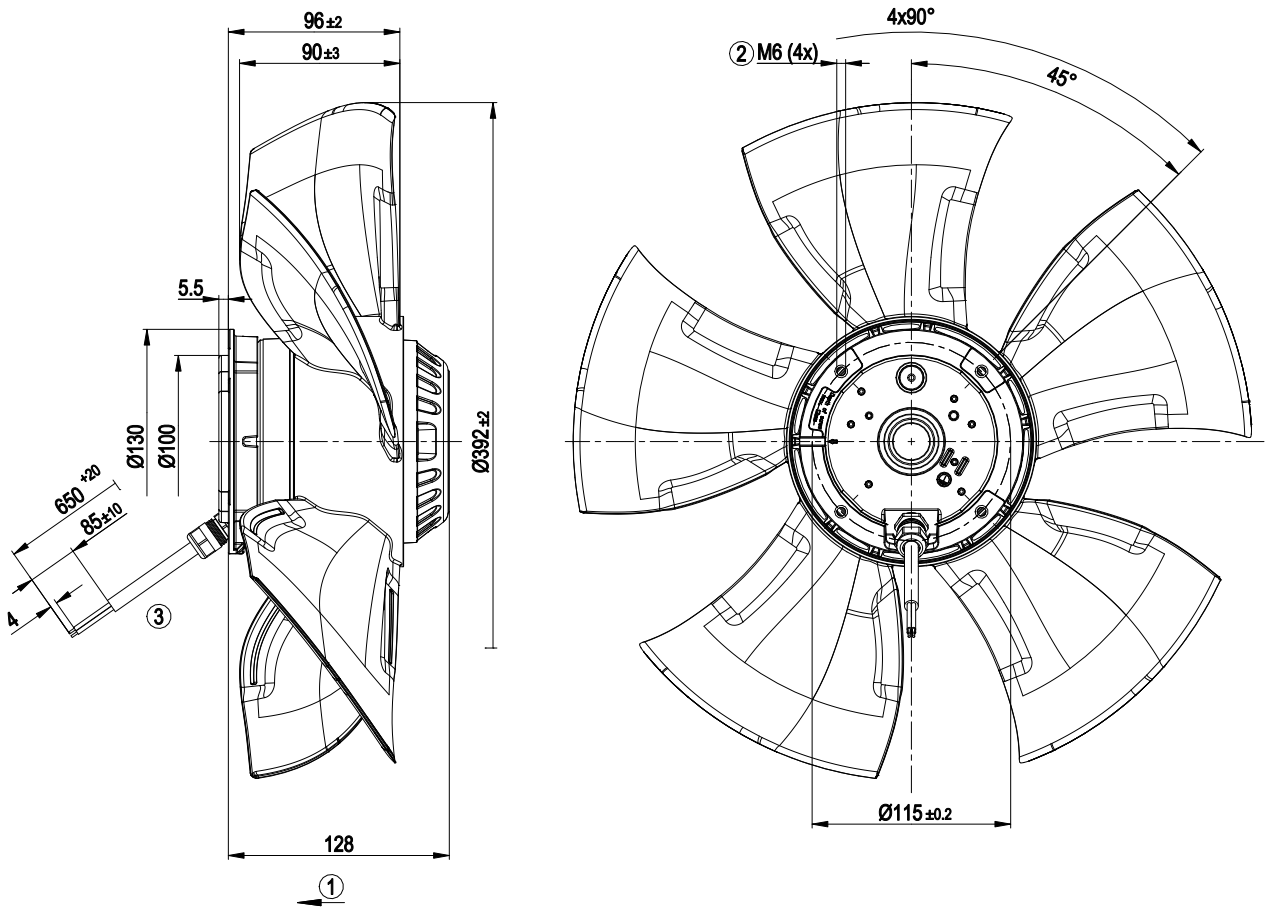


1	Direction of air flow "V"
2	Thread reach max. 12 mm
3	Connection line silicone 9G 0.75 mm <sup>2</sup> , 4 mm bared, not tin-plated



# AC axial fan

sickled blades (S series)


## Connection screen

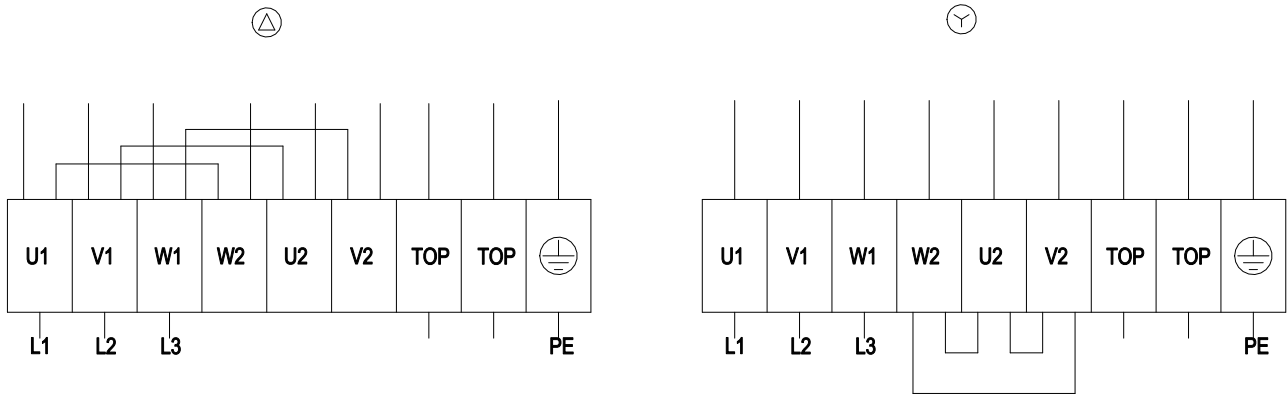

Δ	Delta-connection	Y	Star connection	L1	= U1 = black
L2	= V1 = blue	L3	= W1 = brown	W2	yellow
U2	green	V2	white	TOP	2 x grey
PE	green / yellow				



## Charts: Air flow 50 Hz

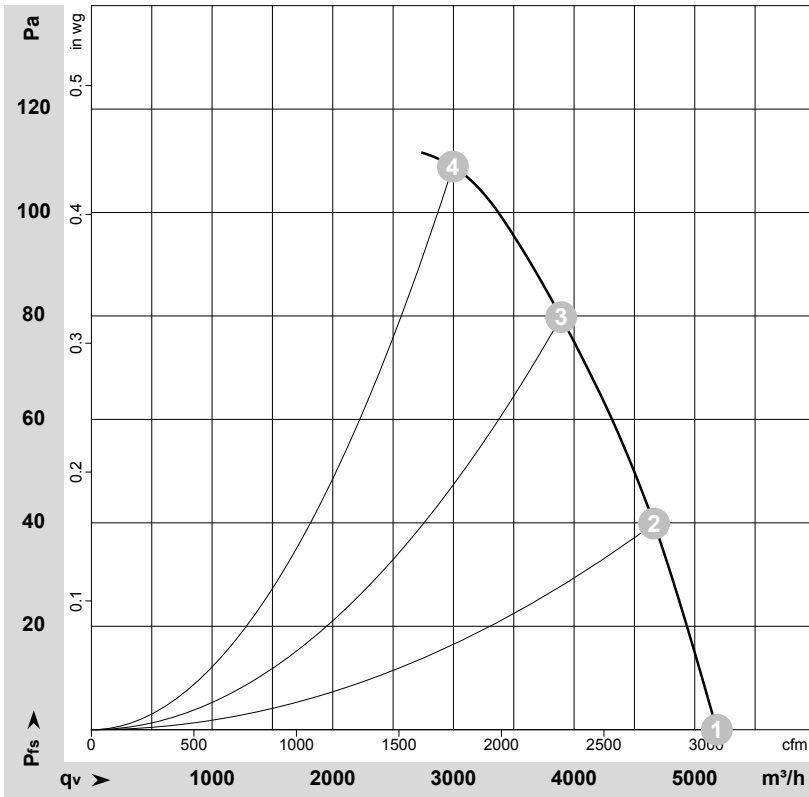

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-109876-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Y	400	50	1420	281	0.85	5185	0	3050	0.00
2	Y	400	50	1410	302	0.86	4660	40	2745	0.16
3	Y	400	50	1410	315	0.86	3890	80	2290	0.32
4	Y	400	50	1410	330	0.82	2995	110	1765	0.44

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase



## Charts: Air flow 60 Hz

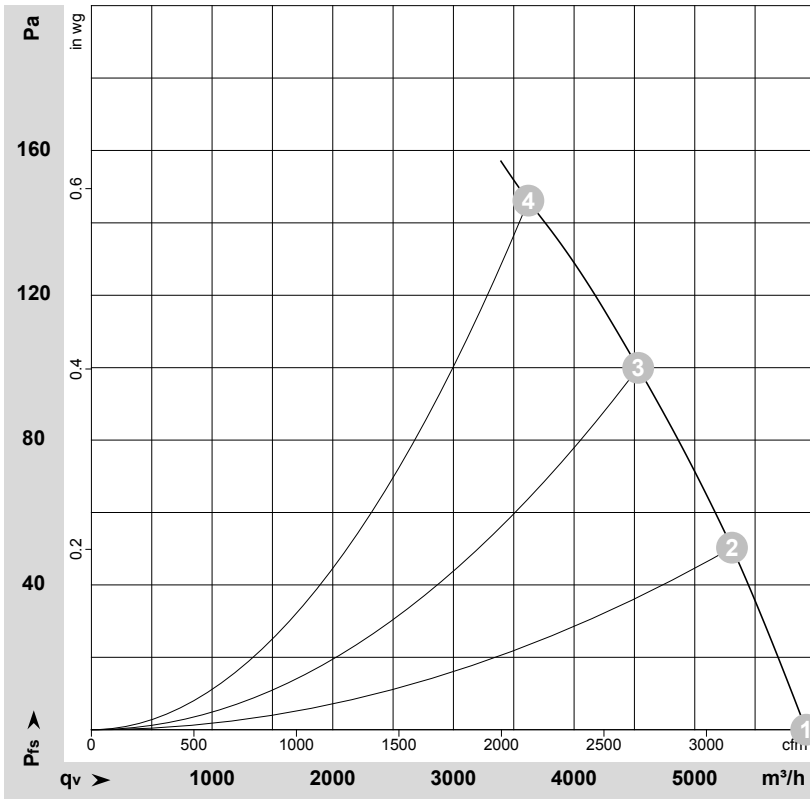

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-161436-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	Conn.	U	f	n	P <sub>e</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	Y. AUS	480	60	1685	441	0.88	5925	0	3485	0.00
2	Y. AUS	480	60	1680	469	0.89	5310	50	3125	0.20
3	Y. AUS	480	60	1670	493	0.90	4530	100	2665	0.40
4	Y. AUS	480	60	1650	520	0.97	3620	145	2130	0.58

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · p<sub>e</sub> = Pressure increase

