

A4E315-AS20-16 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

| Type                        | A4E315-AS20-16    |         |         |
|-----------------------------|-------------------|---------|---------|
| Motor                       | M4E068-DF         |         |         |
| Phase                       |                   | 1~      | 1~      |
| Nominal voltage             | VAC               | 230     | 230     |
| Frequency                   | Hz                | 50      | 60      |
| Method of obtaining data    |                   | ml      | ml      |
| Valid for approval/standard |                   | CE      | CE      |
| Speed (rpm)                 | min <sup>-1</sup> | 1350    | 1490    |
| Power consumption           | W                 | 110     | 148     |
| Current draw                | A                 | 0.52    | 0.66    |
| Capacitor                   | µF                | 3       | 3       |
| Capacitor voltage           | VDB               | 400     | 400     |
| Capacitor standard          |                   | S0 (CE) | S0 (CE) |
| Max. back pressure          | Pa                | 70      | 85      |
| Max. back pressure          | in. wg            | 0.28    | 0.34    |
| Min. ambient temperature    | °C                | -40     | -40     |
| Max. ambient temperature    | °C                | 40      | 40      |
| Starting current            | A                 | 1.2     | 1.18    |


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



### Technical description


|  |  |
|--|--|
| Weight   | 2.1 kg   |
| Size   | 315 mm   |
| Motor size   | 68   |
| Rotor surface  | Painted black  |
| Blade material   | Press-fitted sheet steel blank, sprayed with PP plastic  |
| Number of blades   | 5  |
| Airflow direction  | V  |
| Direction of rotation  | Counterclockwise, viewed toward rotor  |
| Degree of protection   | IP44; installation- and position-dependent as per EN 60034-5   |
| Insulation class   | "F"  |
| Moisture (F) / Environmental (H) protection class                          | H1+  |
| Max. permitted ambient temp. for motor (transport/storage)                 | +70 °C   |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C   |
| Installation position  | Shaft horizontal or rotor on bottom; rotor on top on request   |
| Condensation drainage holes  | On rotor side  |
| Mode   | S1   |
| Motor bearing  | Ball bearing with low-temperature lubricant  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA  |
| Electrical hookup  | Connector with cable   |
| Motor protection   | Thermal overload protector (TOP) internally connected  |
| With cable   | Axial  |
| Protection class assignment  | I; If a protective earth is connected by the customer<br>This component for installation may have several local protection classes. This information relates to this component's basic design.<br>The final protection class is based on the component's intended installation and connection. |
| Conformity with standards  | EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA   |

## Product drawing

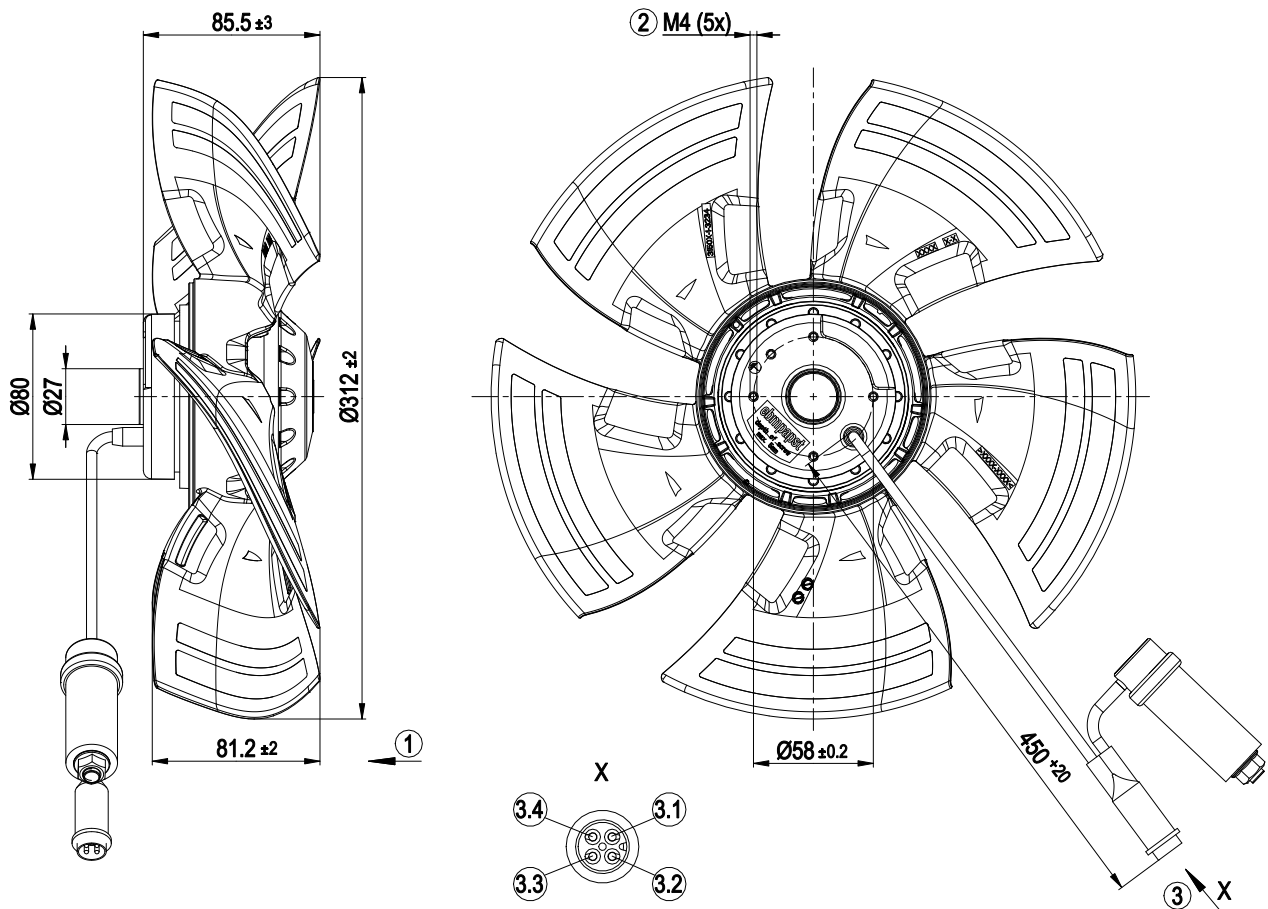


|     |  |
|-----|--|
| 1   | Airflow direction "V"  |
| 2   | Max. clearance for screw 5 mm  |
| 3   | Cable silicone 4G 0.5 mm <sup>2</sup><br>4-pole connector housing TE 0-925075-0 with insulating sleeve, 2x plug pin TE 163555-6, 2x plug pin TE 163303-8 |
| 3.1 | Z + capacitor  |
| 3.2 | N + capacitor  |
| 3.3 | L  |
| 3.4 | PE   |

## Connection diagram



|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |

## Curves: Air performance 50 Hz

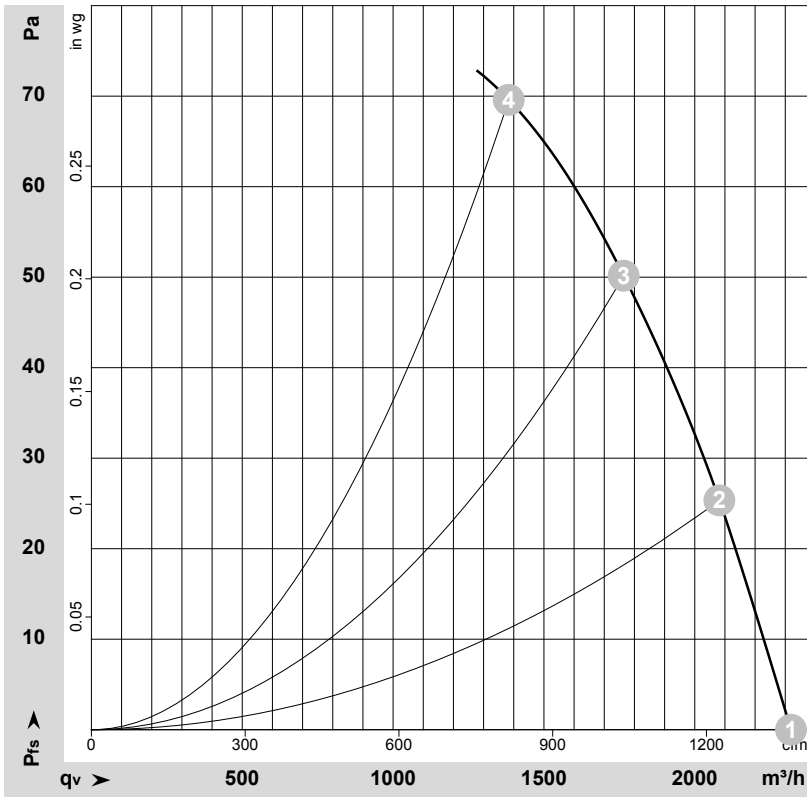

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-159582-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 1390              | 96             | 0.48 | 58                | 64                | 2320           | 0               | 1365           | 0.00            |
| 2 | 230 | 50 | 1380              | 101            | 0.49 | 55                | 61                | 2080           | 25              | 1225           | 0.10            |
| 3 | 230 | 50 | 1365              | 105            | 0.51 | 51                | 59                | 1765           | 50              | 1040           | 0.20            |
| 4 | 230 | 50 | 1350              | 110            | 0.52 | 53                | 61                | 1385           | 70              | 815            | 0.28            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



## Curves: Air performance 60 Hz

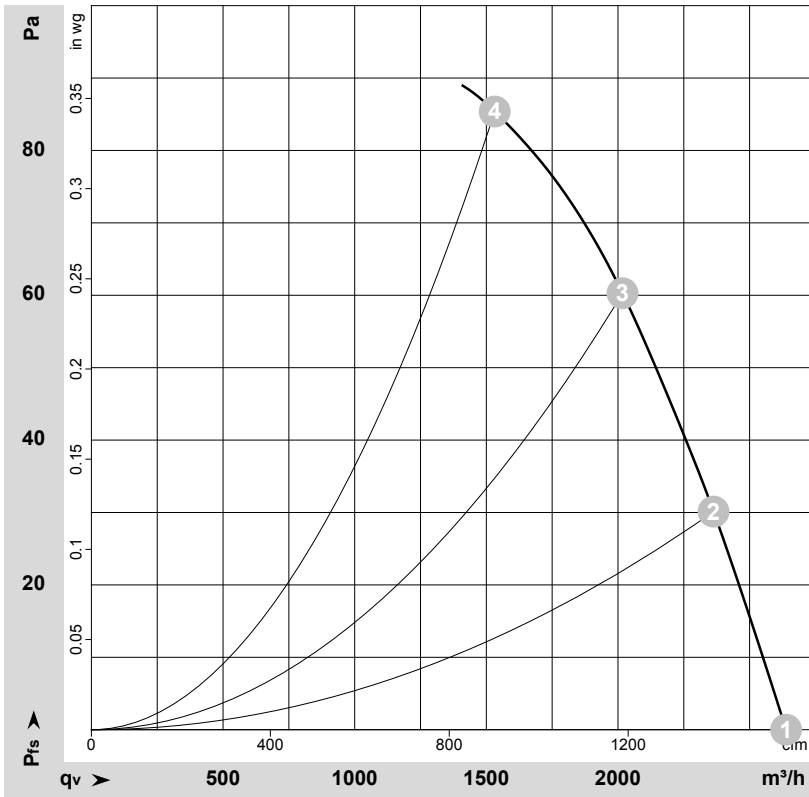

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-159796-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 60 | 1590              | 121            | 0.53 | 60                | 67                | 2640              | 0               | 1555           | 0.00            |
| 2 | 230 | 60 | 1560              | 130            | 0.57 | 58                | 64                | 2365              | 30              | 1390           | 0.12            |
| 3 | 230 | 60 | 1530              | 137            | 0.60 | 55                | 61                | 2015              | 60              | 1185           | 0.24            |
| 4 | 230 | 60 | 1490              | 148            | 0.66 | 60                | 68                | 1530              | 85              | 900            | 0.34            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

