

A4E330-AA06-10 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	A4E330-AA06-10	
Motor	M4E068-EC	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Method of obtaining data		fa
Valid for approval/standard		CE
Speed (rpm)	min <sup>-1</sup>	1400
Power consumption	W	130
Current draw	A	0.58
Capacitor	µF	5
Capacitor voltage	VDB	400
Capacitor standard		S0 (CE)
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40
Starting current	A	1.5

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

	Actual	Req. 2015	
01 Overall efficiency $\eta_{es}$	%	29	28.1
02 Measurement category	A		
03 Efficiency category	Static		
04 Efficiency grade N	40.9	40	
05 Variable speed drive	No		

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption $P_e$	kW	0.13
09 Air flow $q_v$	m <sup>3</sup> /h	1605
09 Pressure increase $p_{fs}$	Pa	91
10 Speed (rpm) $n$	min <sup>-1</sup>	1375
11 Specific ratio*		1.00

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-138394




## Technical description

Weight	3 kg
Fan size	330 mm
Rotor surface	Painted black
Blade material	Sheet steel, painted black
Number of blades	5
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 70 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing with low-temperature lubricant
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Prepared for terminal box installation
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE




## Product drawing

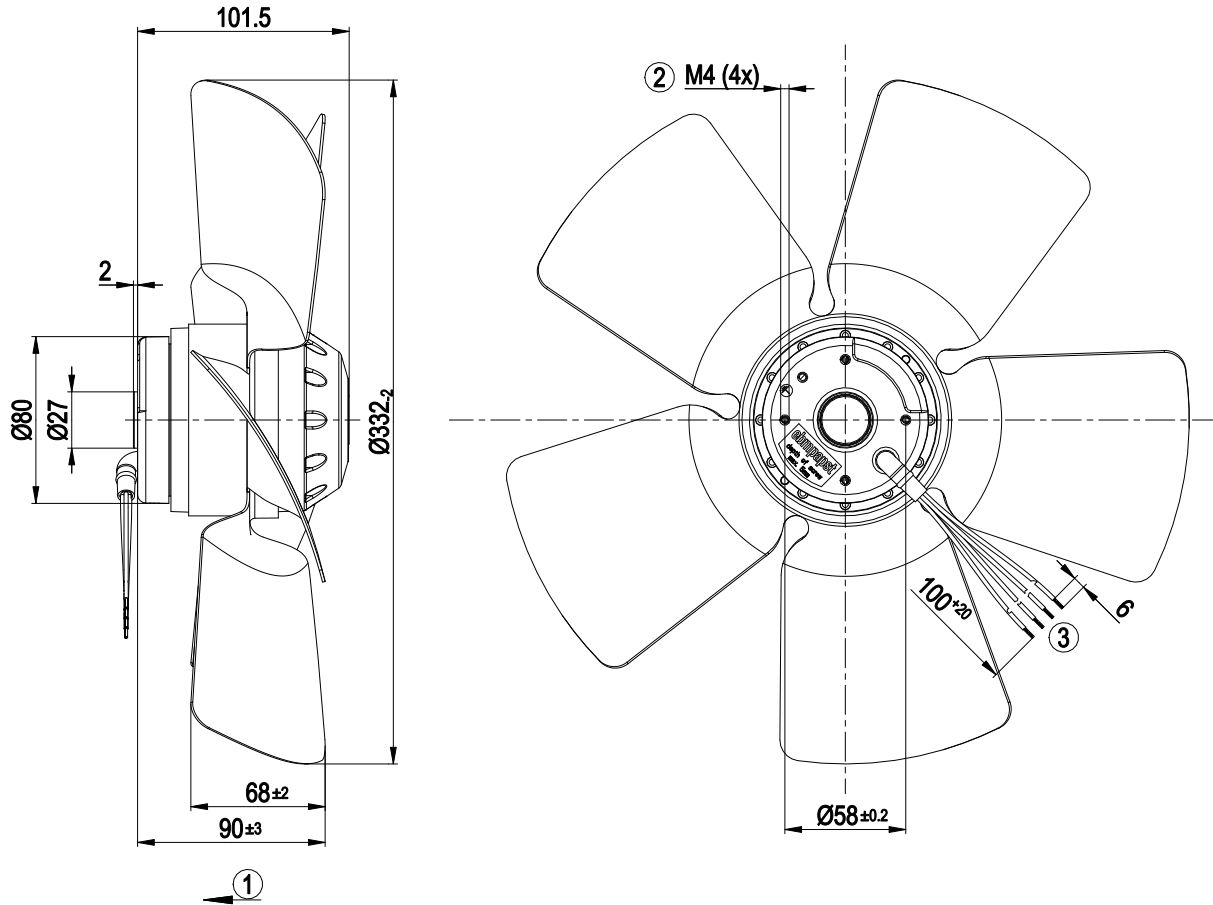

1	Airflow direction "V"
2	Max. clearance for screw 5 mm
3	Cable AWG20, 4x crimped splices


## Connection diagram

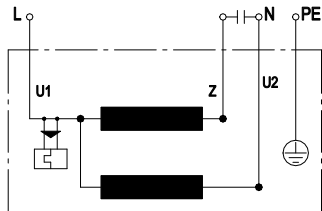

U1	blue	Z	brown	U2	black
PE	green/yellow				



**Curves: Air performance 50 Hz**

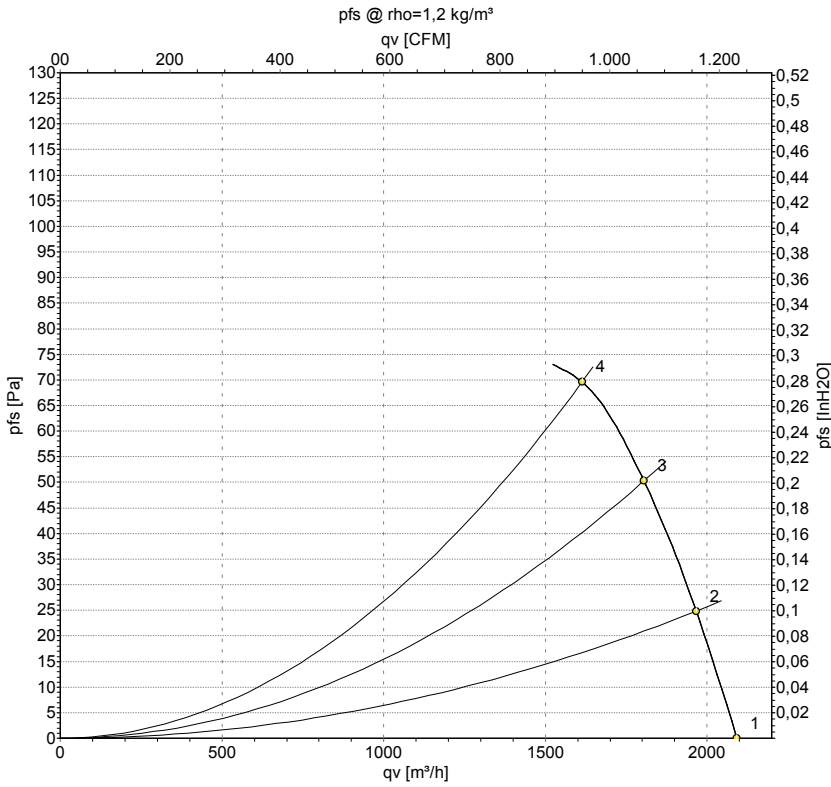

Measurement: LU-16579-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

**Measured values**

	U	f	n	P <sub>e</sub>	I	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	inH <sub>2</sub> O
1	230	50	1400	130	0.58	2095	0	1230	0.00
2	230	50	1405	133	0.58	1965	25	1155	0.10
3	230	50	1395	136	0.59	1805	50	1060	0.20
4	230	50	1395	137	0.59	1615	70	950	0.28

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

