

AC axial fan

straight blades (A series)



A6E360-AE08-09 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	A6E360-AE08-09		
Motor	M6E068-DF		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	850	960
Power consumption	W	65	85
Current draw	A	0.29	0.38
Capacitor	μF	2.5	2.5
Capacitor voltage	VDB	400	400
Max. back pressure	Pa	40	40
Max. back pressure	inH ₂ O	0.16	0.16
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	50	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC axial fan

straight blades (A series)

Technical description


Weight	2 kg
Fan size	360 mm
Rotor surface	Painted black
Impeller material	PP plastic
Number of blades	3
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC axial fan


straight blades (A series)

Product drawing

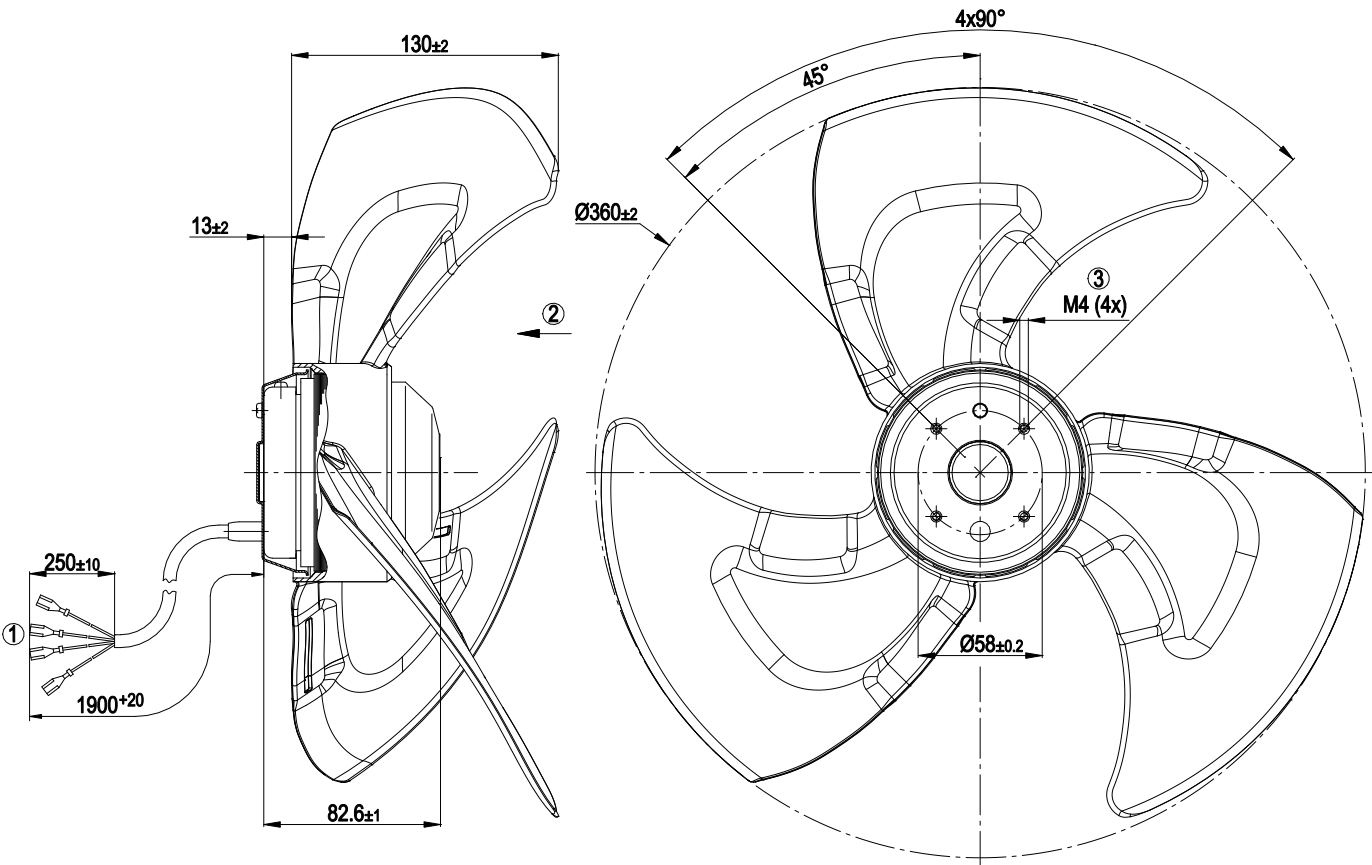

1	Cable PVC 0.5 mm², 4 flat push-on receptacles 6.3 x 0.8 crimped
2	Direction of air flow "V"
3	Max. clearance for screw 5 mm

Connection diagram

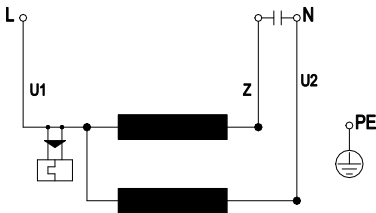


U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan
straight blades (A series)

Curves: Air performance 50 Hz

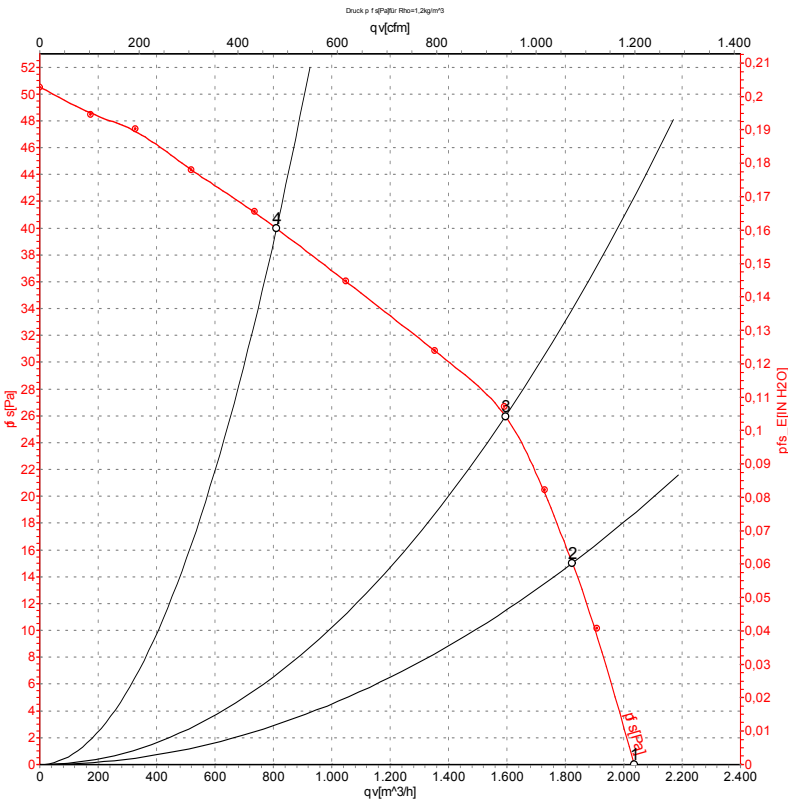

Measurement: LU-41844-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	230	50	850	65	0.29	2035	0	1200	0.00
2	230	50	850	65	0.28	1825	15	1075	0.06
3	230	50	840	65	0.28	1595	25	940	0.10
4	230	50	785	69	0.30	810	40	475	0.16


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase



AC axial fan

straight blades (A series)

Curves: Air performance 60 Hz

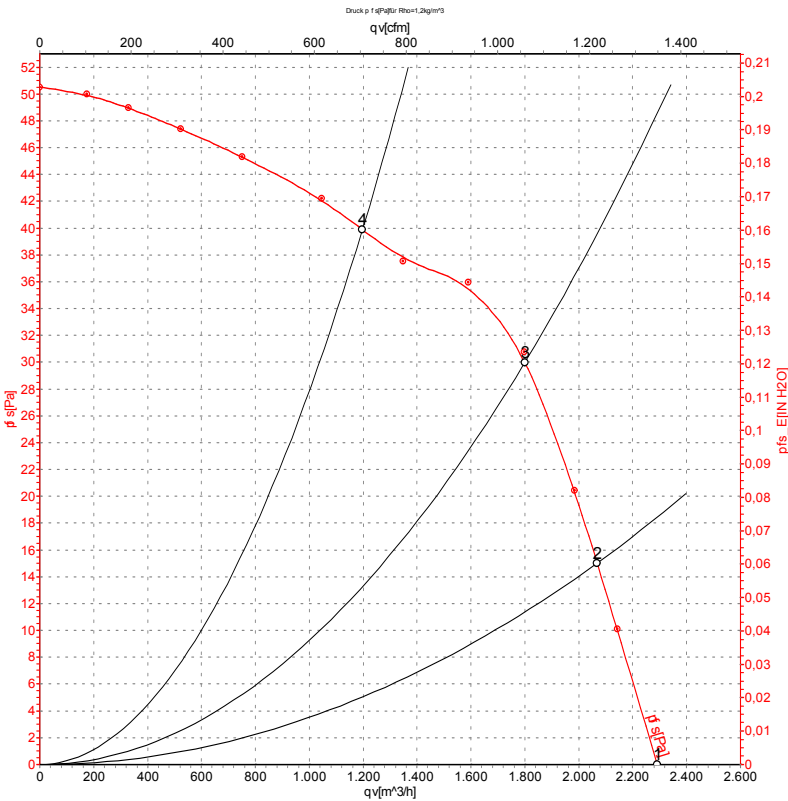

Measurement: LU-41845-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	230	60	960	85	0.38	2290	0	1350	0.00
2	230	60	945	86	0.38	2070	15	1215	0.06
3	230	60	925	87	0.39	1800	30	1060	0.12
4	230	60	860	88	0.39	1195	40	705	0.16

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

