

AC axial fan

sickle-shaped blades (S series)



A6E450-AH08-06 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	A6E450-AH08-06	
Motor	M6E074-EI	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Method of obtaining data		fa
Valid for approval/standard		-
Speed (rpm)	min ⁻¹	910
Power consumption	W	142
Current draw	A	0.63
Capacitor	µF	4
Capacitor voltage	VDB	400
Max. back pressure	Pa	45
Max. back pressure	inH ₂ O	0.18
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	45


ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description

Weight	3.5 kg
Fan size	450 mm
Rotor surface	Painted black
Impeller material	PP plastic
Number of blades	3
Airflow direction	"V"
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5. The degree of protection is only assured when the intended cable guard and terminal box are installed.
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F4-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Prepared for terminal box installation
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1

Product drawing

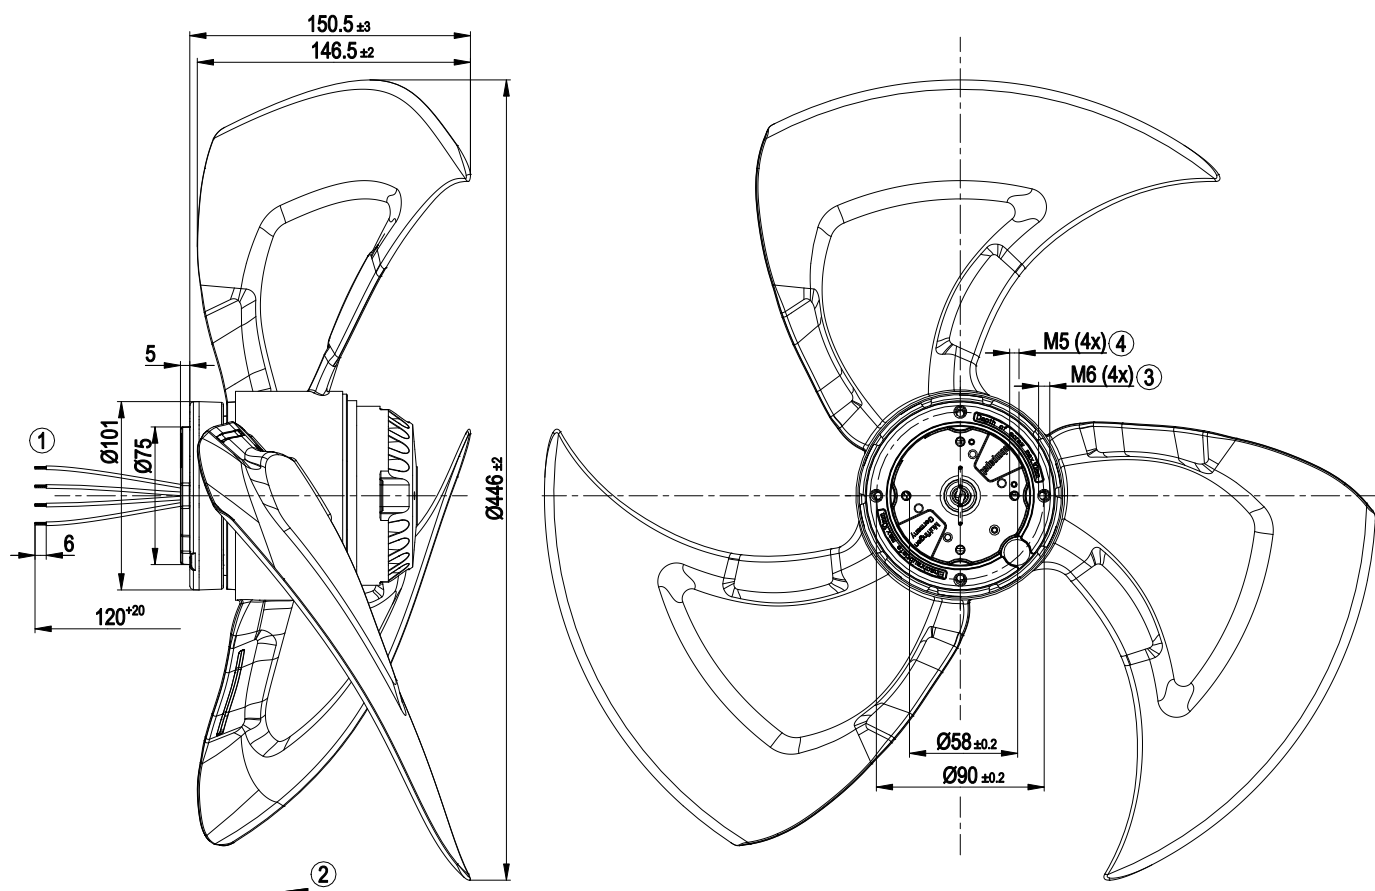


1	Cable ETFE AWG 20, 4x crimped splices
2	Direction of air flow "V"
3	Max. clearance for screw 10 mm
4	Max. clearance for screw 6 mm

AC axial fan

sickle-shaped blades (S series)

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC axial fan

sickle-shaped blades (S series)

Curves: Air performance 50 Hz

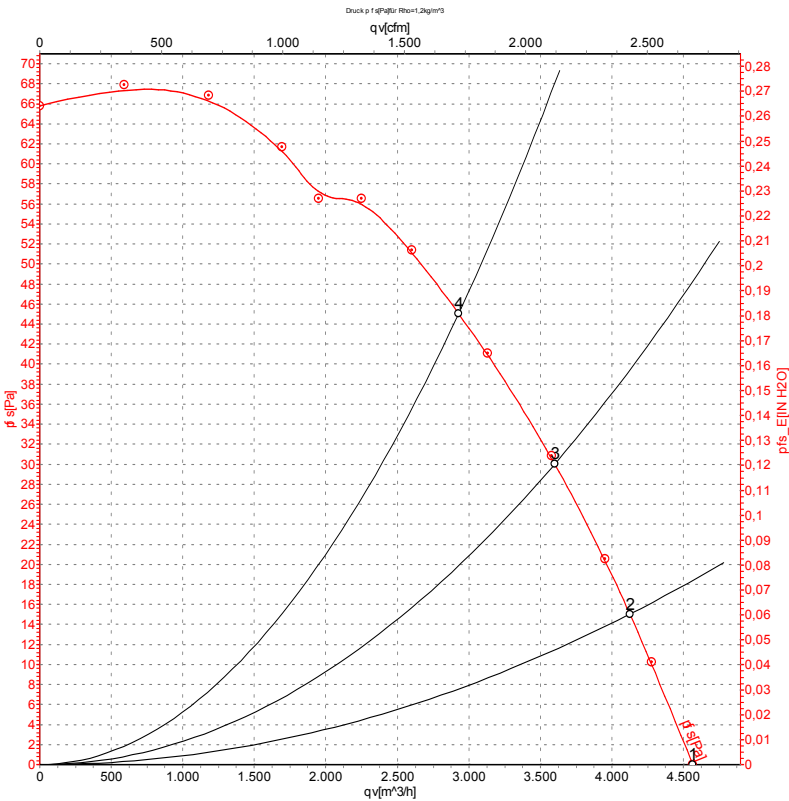

Measurement: LU-48469-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{ts}	qv	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	230	50	910	142	0.63	4565	0	2685	0.00
2	230	50	895	146	0.64	4125	15	2430	0.06
3	230	50	885	150	0.66	3600	30	2120	0.12
4	230	50	870	155	0.68	2930	45	1725	0.18

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{ts} = Pressure increase

