

Product Data Sheet

9205414000
VWS0143XSLCS
AC 6200 NM

ebmpapst

The engineer's choice

AC6200NM (9205414000) ebmpapst Datasheet
sales@fansco.com
www.fansco.com



AC 6200 NM

INDEX

1 General 3

2 Mechanics 3

2.1 General..... 3

2.2 Connections..... 3

3 Operating Data 4

3.1 Electrical Interface - Input..... 4

3.2 Electrical Operating Data 4

3.3 Electrical Features 5

3.4 Aerodynamics 6

3.5 Sound Data..... 7

4 Environment..... 8

4.1 General..... 8

4.2 Climatic Requirements 8

5 Safety..... 9

5.1 Electrical Safety 9

5.2 Approval Tests 9

6 Reliability..... 10

6.1 General..... 10

1 General

Fan type	Fan
Rotating direction looking at rotor	Counterclockwise
Airflow direction	Air outlet over struts
Bearing system	Ball bearing
Mounting position - shaft	Any


2 Mechanics

2.1 General

Width	0 mm	
Height	0 mm	
Depth	84 mm	
Diameter	172 mm	
Mass	0,905 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	Wire outlet corner: 600 Ncm Remaining corners: 600 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Lead wire length	L = 450 mm	
Tolerance	+ - 10 mm	
Tube length	S = 10 mm	
Tolerance	+ - 5 mm	
Wire size (AWG)	22	
Insulation diameter		
Plug	See drawing	
Contact	See drawing	

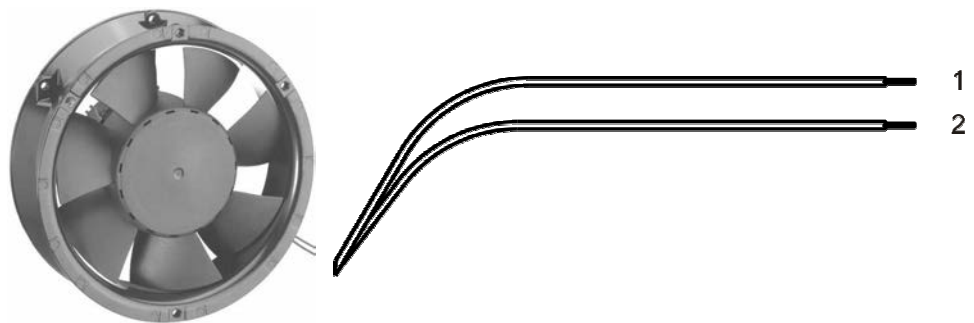

Wire	Color	Operation
1	black	L
2	black	N

3 Operating Data

3.1 Electrical Interface - Input

External voltage supply for input and output signals must be SELV conform.
--

Control input	None
---------------	------

Features

3.2 Electrical Operating Data

Features	Condition	Symbol	Values			
Voltage range Tolerance		U	85 V			265 V
Nominal voltage		U_N		115 V	230 V	
Frequency		f	50 Hz / 60 Hz			
Power consumption Tolerance	$\Delta p = 0$	P	11,5 W + - 20 %			
Current consumption Tolerance	$\Delta p = 0$	I_{RMS}	255 mA + - 20 %	95 mA + - 25 %	105 mA + - 20 %	84 mA + - 25 %
Speed Tolerance	$\Delta p = 0$	n	2.850 1/min + - 10 %			

3.3 Electrical Features

Electronic function	None	
Locked rotor protection	PWM	

3.4 Aerodynamics


Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801. Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal. The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a) Operation condition: 2.850 1/min at free air flow Frequency: 50 Hz Nominal voltage: 230 V

Max. free-air flow ($\Delta p = 0 / \dot{v} = \text{max.}$)	325,0 m ³ /h
Max. static pressure ($\Delta p = \text{max.} / \dot{v} = 0$)	145 Pa

b) Operation condition: 2.850 1/min at free air flow Frequency: 60 Hz Nominal voltage: 115V

Max. free-air flow ($\Delta p = 0 / \dot{v} = \text{max.}$)	325,0 m ³ /h
Max. static pressure ($\Delta p = \text{max.} / \dot{v} = 0$)	145 Pa

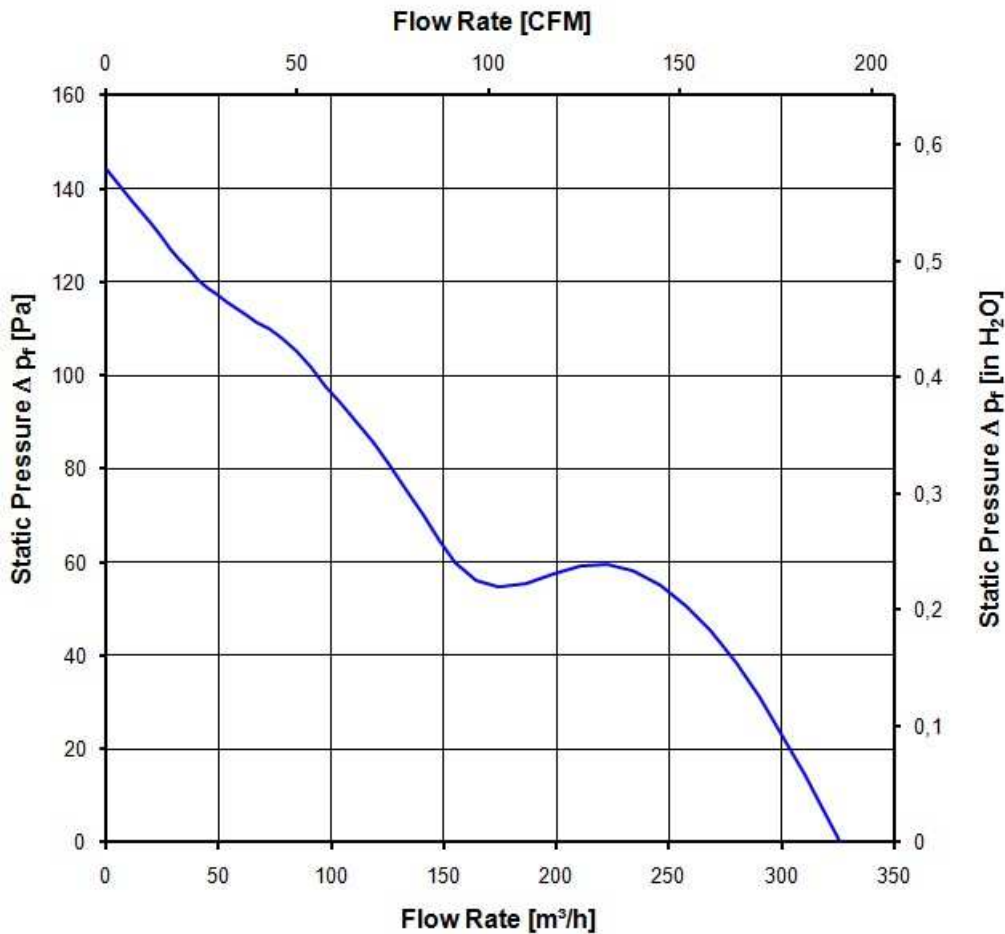

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB}(A)$
For further measurement conditions see chapter aerodynamics.

a) Operation condition:

2.850 1/min at free air flow

Frequency: 50 Hz

Nominal voltage: 230 V

Optimal operating point	255,0 m ³ /h @ 46 Pa	
Sound power level at the optimal operating point	5,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	50,0 dB(A)	

b) Operation condition:

2.850 1/min at free air flow

Frequency: 60 Hz

Nominal voltage: 115V

Optimal operating point	255,0 m ³ /h @ 46 Pa	
Sound power level at the optimal operating point	5,7 bel(A)	
Sound pressure level at free air flow, measured in rubber bands	50,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	72 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic Requirements

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

A verification of thermal conditions (normal and abnormal operation) as well as the protection against electric shock, ingress of solid foreign objects and water has to be done in conjunction with the appliance.

Test voltage HV type test	1500 V
Unit test voltage	VAC
Time type test HV	1 s
Insulation resistance	RI > 10 MOhm
Protection class	built-in fan

5.2 Approval Tests

CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans E38324
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60335 (VDE 0700) - Safety for household and similar electrical appliances
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	Yes / GB 12350 Safety Requirements for small Power Motors

According to the guidelines on the application of Directive 2006/95/EC, chapter III: Scope of the "low voltage" directive, paragraph: Are "components" included in the scope? the following has to be applied:



However, some types of electrical devices, designed and manufactured for being uses as basic components to be incorporated into other electrical equipment, are such that their safety to a very large extent depends on how they are integrated into the final product and the overall characteristics of the final product. These basic components include electronic and certain other components.

Taking into account these objectives of the "Low Voltage" Directive, such basic components, the safety of which can only, to a very large extend, be assessed taking into account, how they are incorporated and for which a risk assessment cannot be undertaken, then they are not covered as such by the Directive. In particular, they must not be CE marked unless covered by other Community legislation that requires CE marking.


6 Reliability**6.1 General**

Life expectancy L10 at TU = 40 °C	80.000 h	
Life expectancy L10 at TU max.	37.500 h	
Life expectancy L10 acc. to IPC 9591 at TU = 40 °C	135.000 h	

Copyright of this document and shall be to others and the use or communication of the contents thereof, are forbidden without express written permission of the patent holder. In the event of the grant of a patent or the registration of a utility model or design, the patent holder reserves the right to take legal action against third parties who use or communicate the contents of this document without his express written permission. All rights are reserved.

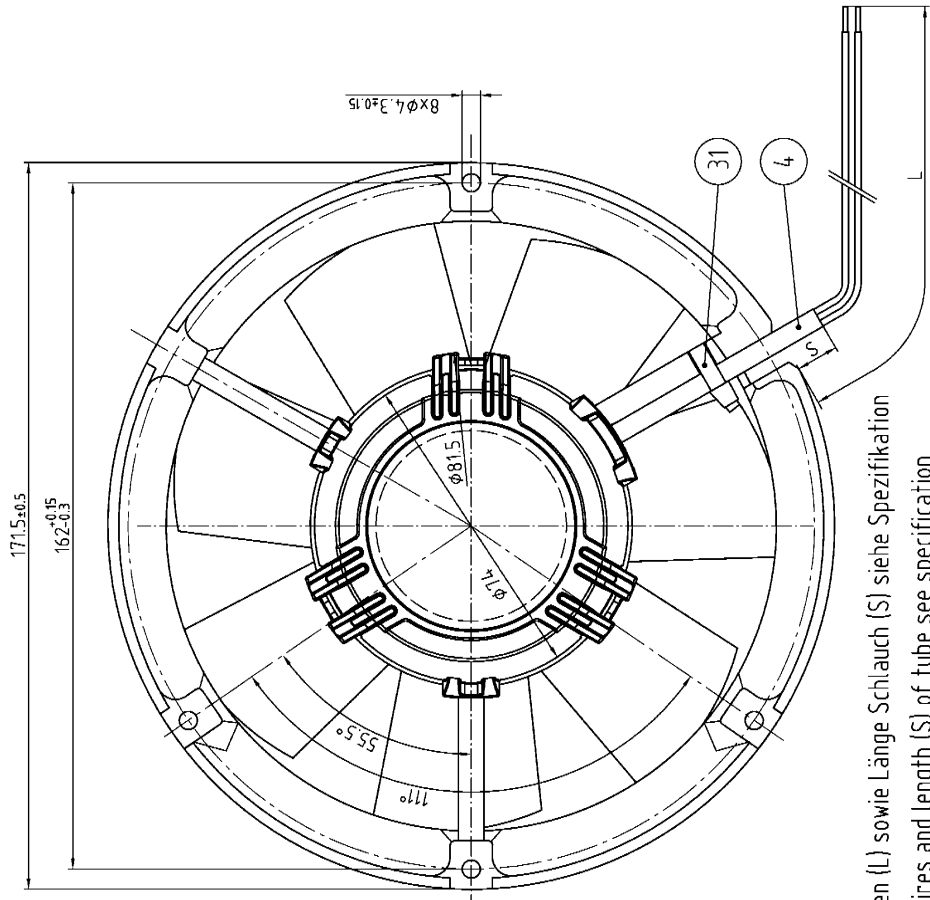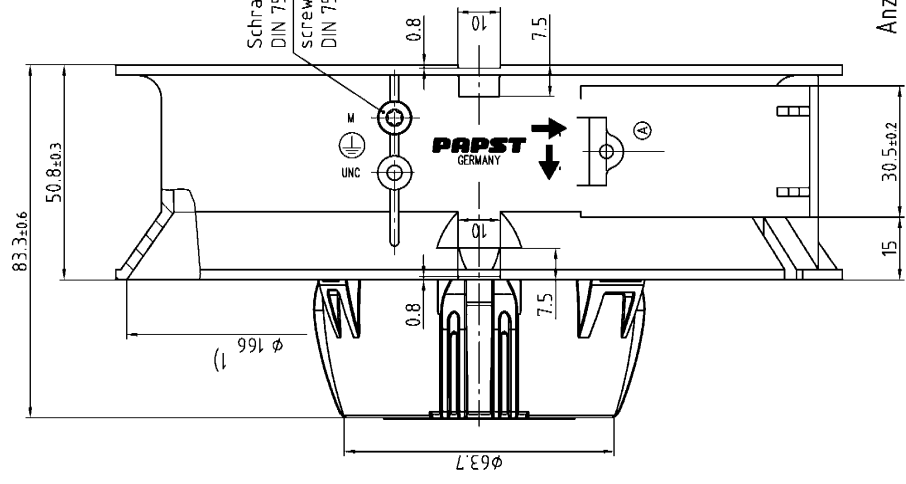

Anzahl und Länge der Litzen (L) sowie Länge Schlauch (S) siehe Spezifikation
length (L) and number of wires and length (S) of tube see specification

Teilenummer/Part no.: DIN 7167		Material/Scale	
Allgemeintoleranzen/General tolerances: DIN ISO 2768-mK-E		Article/Title: axial fan	
Bezeichnung/Designation	Name/Name	 ebmpapst ebm-papst-St. Georgen/Gaith & Co. KG	
Blatt/Drawing	Name/Name		
Zeich.-Nr. / Drawing No.: 1500/0002_Aerz. Nr. / Change No.:		Blatt/Page: A3	
Sperr- / Verwendungs- / Freigabe- / Check- / for release / 3Y		Ers. / Z. / Abh. / Replaces: A3	

1) Durchmesser für Ausschnitt (Luftauslass)
- Axialspiel: mit Feder spielfrei verspannt

1) diameter for cutout (air outlet)
- without axial clearance by a pre-loaded spring